

TA 130 IF SERIES

R-1W tire for high power tractors


- Tires designed to carry 20% higher load than standard tires at the same air pressure.
- Highly flexible sidewalls and large footprint offer lower soil compaction.
- Perfect performance under heavy loads with lower pressure compared to traditional radial tire construction.
- Special tread design enables exceptional traction performance.
- Lower inflating pressure and sidewall flexibility enable comfortable riding.
- **Elastic structure absorbs impacts effectively.**
- Strong carcass, and special tread compound ensure longer service life.




TA 130 IF SERIES

IF 600/70 R30 (16.9 R34)	TL	165 D
IF 800/70 R38 (20.8 R38)	TL	184 D


IF: Improved Flexion

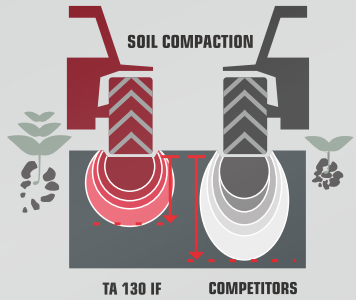

PERFORMANCE RATINGS

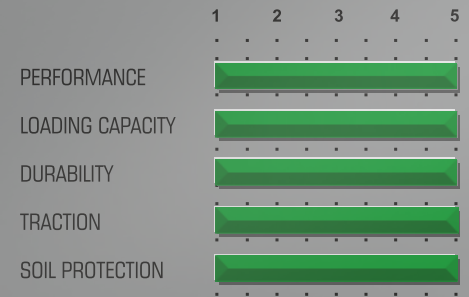

Improved Flexion (IF) Tires: These tires are designed for low air pressure, reducing soil compaction by offering large footprint.

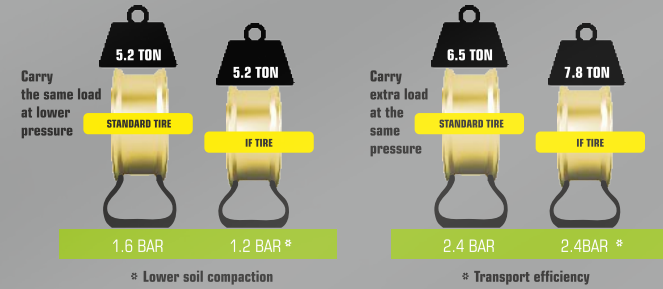

TA 130 AGROPER

Aramid Belted

R-1W Harvester tire with Aramid Belted structure

- Perfect performance under heavy loads and high traction with its extra reinforced carcass and bead.
- Wider footprint and optimized lug angle minimize soil compaction and crop damage.
- Elastic structure absorbs impacts and yields better flotation.
- **Special tread compound provides maximum resistance against punctures.**


TA 130 AGROPER

620/75 R26 (23.1 R26)	TL	166/A8
620/75 R30 (23.1 R30)	TL	163/A8
650/75 R32 (24.5 R32)	TL	172 A8/172 B
800/65 R32 (30.5 R32)	TL	178 A8/ 178 B

Innovative construction

- Special tread design enables exceptional traction and better handling on field and tillage operations.

- Aramid belt technology provides extra protection against stubble damage and ground impacts compared to steel and fabric alternatives
- Reinforced bead structure ensures long life by improving the tire's endurance.

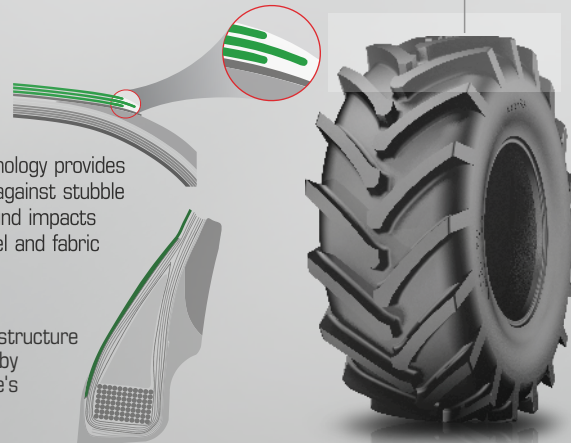

PERFORMANCE RATINGS



Delta Agrar

Fendt 936 Vario

Rear: 710/70 R42 TA-130 **Front:** 600/65 R34 TA-110

Country: Serbia

"As Delta company we use Petlas radial tires at our agro fleet for over 6-years.

We are very pleased with the performance of Petlas in terms of traction, soil compaction, self-cleaning and service life. Driving comfort and tire appearance are also other attributes that we enjoy."

Headquarters - Factory

Petlas Tire Industry and Trade
Kindam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade
Ako Kule, Söğütözü Mh. 2178. Cad. No: 6
06530 Ankara / TURKEY
T: +90 312 309 30 30 • F: +90 312 309 22 66

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA
www.petlas.com



AGRICULTURAL TIRES

TA 110 TA 120 TA 130 TA 130 IF SERIES TA 130 AGROPER

TA 110

General purpose R-1W tractor radial tire

- Special tread compound provides high level of resistance against wear and cuts.
- Tread profile provides exceptional traction and high performance during its service life.
- Wider footprint provides lower soil compaction.
- Offers excellent self-cleaning capability.
- Tread profile enhances resistance against tread base fatigue.
- Ensures a comfortable ride at all terrains.
- Low rolling resistance yields fuel efficiency.
- Special tread structure improves flotation on soft terrains.



PERFORMANCE RATINGS




TA 120

General purpose R-1W row crop tractor and sprayer tire

- Deep lugs and special tread compound maintain longer service life.
- Narrow profile avoids crop damage.
- Special tread compound provides high resistance against wear and cuts.
- Tread design enhances self-cleaning capability and ensures less slippage.
- Robust carcass structure enables maximum performance under heavy loads.



PERFORMANCE RATINGS

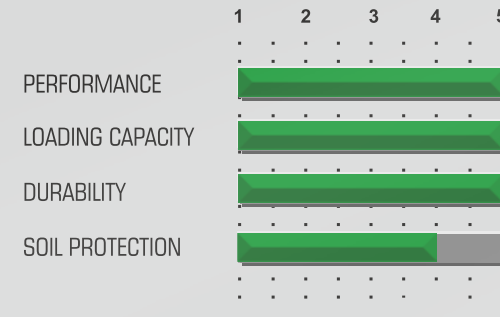


TA 130

R-1W tire for high power tractors

- Built for high HP tractors, TR 130 is designed to transmit torque to the ground more effectively on any terrain.
- Special tread geometry ensures less slippage and better traction which saves on fuel.
- Wider footprint and optimized lug angle minimize soil compaction and improves crop productivity.
- Elastic structure absorbs impacts and yields better flotation.
- Strong carcass and high-quality tread compound ensures longer service life.
- Provides driving comfort both on the road and on the field.
- Reinforced carcass structure enables maximum performance under heavy loads.



PERFORMANCE RATINGS

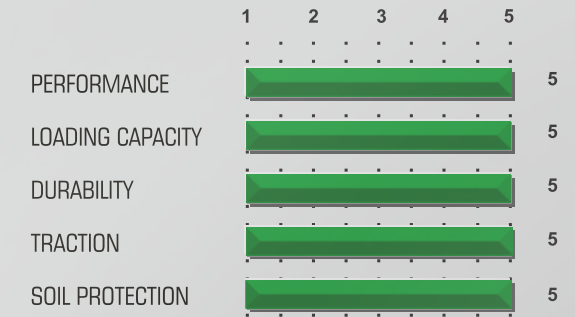

TA 110/85 SERIES

9.50 R20	TL 108 A8/105 B
280/85 R20 (11.2 R20)	TL 112 A8/109 B
320/85 R20 (12.4 R20)	TL 119 A8/116 B
9.50 R24	TL 107 A8/104 B
280/85 R24 (11.2 R24)	TL 115 A8/112 B
320/85 R24 (12.4 R24)	TL 122 A8/119 B
340/85 R24 (13.6 R24)	TL 125 A8/122 B
380/85 R24 (14.9 R24)	TL 131 A8/128 B
420/85 R24 (16.9 R24)	TL 137 A8/134 B
280/85 R28 (11.2 R28)	TL 118 A8/115 B
320/85 R28 (12.4 R28)	TL 124 A8/121 B
340/85 R28 (13.6 R28)	TL 127 A8/124 B
380/85 R28 (14.9 R28)	TL 133 A8/130 B
420/85 R28 (16.9 R28)	TL 139 A8/136 B
380/85 R30 (14.9 R30)	TL 135 A8/132 B
420/85 R30 (16.9 R30)	TL 140 A8/137 B
460/85 R30 (18.4 R30)	TL 145 A8/142 B
320/85 R32 (12.4 R32)	TL 126 A8/126 B
380/85 R34 (14.9 R34)	TL 137 A8/137 B
420/85 R34 (16.9 R34)	TL 142 A8/139 B
460/85 R34 (18.4 R34)	TL 147 A8/144 B
320/85 R36 (12.4 R36)	TL 128 A8/125 B
340/85 R36 (13.6 R36)	TL 132 A8/129 B
320/85 R38 (12.4 R38)	TL 143 A8/143 B
340/85 R38 (13.6 R38)	TL 133 A8/130 B
380/85 R38 (14.9 R38)	TL 139 A8/136 B
420/85 R38 (16.9 R38)	TL 144 A8/141 B
460/85 R38 (18.4 R38)	TL 149 A8/146 B
460/85 R38 R/F (18.4 R38)	TL 149 A8/146 B
520/85 R38 (20.8 R38)	TL 155 A8/152 B
520/85 R38 R/F (20.8 R38)	TL 155 A8/152 B

TA 110/70 SERIES

650/85 R38	TL 173 A8/173 B
520/85 R42 (20.8 R42)	TL 157 A8/157 B
520/85 R42 R/F (20.8 R42)	TL 162 A8/162 B
520/85 R46 (20.8 R46)	TL 158 A8/155 B

TA 110/80 SERIES		
260/80 R20 (8.00 R20)	TL 106 A8/103 B	
480/80 R38 (18.4 R38)	TL 149 A8/149 B	
480/80 R42 (18.4 R42)	TL 151 A8/151 B	
480/80 R46 (18.4 R46)	TL 158 A8/158 B	
480/80 R50 (18.4 R50)	TL 159 A8/159 B	

TA 110/65 SERIES

420/65 R24 (12.4 R24)	TL 126 D/126 B
440/65 R24 (13.6 R24)	TL 128 D/131 A8
480/65 R24 (14.9 R24)	TL 133 D/136 A8
540/65 R24 (16.9 R24)	TL 140 D/143 A8
440/65 R28 (13.6 R28)	TL 131 D/134 A8
480/65 R28 (14.9 R28)	TL 136 D/139 A8
540/65 R28 (16.9 R28)	TL 149 D/152 A8
540/65 R30 (16.9 R30)	TL 150 D/153 A8
540/65 R34 (16.9 R34)	TL 145 D/148 A8
600/65 R34 (18.4 R34)	TL 151 D/154 A8
540/65 R38 (16.9 R38)	TL 147 D/150 A8
600/65 R38 (18.4 R38)	TL 159 D/162 A8
650/65 R38	TL 163 D/166 A8


TA 120 - Row Crop

210/95 R32 (8.3 R32)	TL 114 A8/114 B
230/95 R32 (9.5 R32)	TL 126 A8/126 B
270/95 R32 (11.2 R32)	TL 136 A8/136 B
210/95 R36 (8.3 R36)	TL 116 A8/116 B
230/95 R36 (9.5 R36)	TL 128 A8/128 B
270/95 R38 (11.2 R38)	TL 140 A8/140 B
230/95 R40 (9.5 R40)	TL 122 A8/122 B
210/95 R44 (8.3 R44)	TL 120 A8/120 B
230/95 R44 (9.5 R44)	TL 132 A8/132 B

270/95 R44 (11.2 R44)	TL 142 A8/142 B
300/95 R46 (12.4 R46)	TL 148 A8/148 B
230/95 R48 (9.5 R48)	TL 136 A2/125 A8
270/95 R48 (11.2 R48)	TL 144 A8/144 B
300/95 R52 (12.4 R52)	TL 156 D/159 A8
270/95 R54 (11.2 R54)	TL 157 A2/146 A8
380/90 R46 (14.9 R46)	TL 159 D/162 A8
340/85 R48 (13.6 R48)	TL 151 D/154 A8

TA 130

600/70 R28 (18.4 R30)	TL 161 D
600/70 R30 (23.1 R26)	TL 158 D
600/70 R34 (23.1 R34)	TL 160 D
710/70 R38 (20.8 R42)	TL 171 D/174 A8
800/70 R38 (20.8 R46)	TL 178 D/181 A8
620/70 R42 (20.8 R42)	TL 166 D
710/70 R42 (20.8 R46)	TL 173 D/176 A8
600/65 R28 (18.4 R28)	TL 154 D/157 A8
600/65 R42 (18.4 R42)	TL 154 D/157 A8
650/65 R42 (20.8 R42)	TL 170 D/173 A8

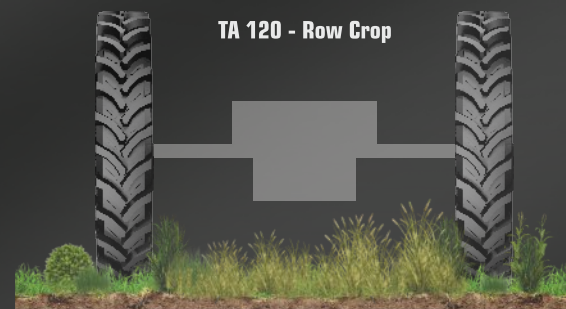

AGRICULTURE IS YOUR CRAFT.
WE JUST DELIVER THE BEST TOOLS FOR IT.