petlas



# PCR-4X4 & SUV-LTR TIRES

petlas
TRACK OF TRUST

# CONTENTS


2 Range of Petlas Tires

4 Petlas Tires by Size

- Passenger Tires
- 4x4 Tires
- LTR Tires

8 General Information

- Sidewall Markings
- Radial Tire Construction
- Important Definitions Related
- Dimensions
- Speed Index Table
- Load Index Table

66 Technical Table

- PCR Tires
- 4x4 Tires
- LTR Tires


## Passenger Tires


PT311 16 | PT515 18 | PT525 20 | PT535 22 | PT711 24 | PT721 26 | PT731 28 | PT741 30 | W601 34 | W651 36 | PT555* 38


## SUV, 4X4 Tires


PT411 42 | PT421 44 | PT431 46 | W671 48


## LTR Tires


PT825 52 | PT825 plus 54 | PT835 56 | PT875 58 | PT925 60 | PT935 62 | PT945* 64


* UNDER DEVELOPMENT

petlas
TRACK OF TRUST

# RANGE OF PETLAS TIRES

## Passenger Tires



PT 311 ELEGANT



PT 515 IMPERIUM



PT 525 PROGREEN



PT 535 IMPERIUM



PT 711 VELOX SPORT



PT 721 VELOX SPORT



PT 731 VELOX SPORT



PT 741 VELOX SPORT



W 601 SNOW MASTER



W 651 SNOW MASTER



PT 555 MULTI ACTION
UNDER DEVELOPMENT
(All Season Tire)

## SUV - 4X4 Tires



PT 411A/S EXPLERO



PT 421A/S EXPLERO



PT 431H/T EXPLERO



W 671 EXPLERO



PT 835 FULL POWER



PT 875 ADVENTE



PT 925 FULL GRIP



PT 935 FULL GRIP

## LTR Tires



PT 825 FULL POWER



PT 825 FULL POWER PLUS



PT 945 FULL GRIP
UNDER DEVELOPMENT
(Winter Tire)

petlas

## PT 311 Elegant

155/80R 12
155/80R 13
165/80R 13
165/80R 13 RF
175/80R 14
165/80R 15
145/70R 12
155/70R 12
165/70R 12
175/70R 12
145/70R 13
155/70R 13
165/70R 13
165/70R 13 RF
175/70R 13
185/70R 13
165/70R 14
165/70R 14 RF
175/70R 14
175/70R 14 RF
185/70R 14
195/70R 14
195/70R 15 RF
155/65R 13
165/65R 13
175/65R 13
155/65R 14
165/65R 14
175/65R 14
175/65R 14 RF
185/65R 14
195/65R 14
175/65R 15
185/65R 15
195/65R 15 RF
195/65R 15
165/60R 14



## PT 515 Imperium

175/70R 13
175/70R 14
175/70R 14 RF
185/70R 14
175/65R 14
175/65R 14 RF
185/65R 14
175/65R 15
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
205/65R 15
205/65R 15 RF
215/65R 15
205/65R 16
215/65R 16
175/60R 13
185/60R 14
195/60R 14
185/60R 15
185/60R 15 RF
195/60R 15
205/60R 14
205/60R 15
205/60R 16
185/55R 15
195/55R 15
205/55R 15
195/55R 16
205/55R 16
205/55R 16
215/55R 16
225/55ZR 16
225/55ZR 17
195/50R 15
205/50R 15
205/50ZR 16
205/50ZR 17 RF
225/50ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF



## PT 525 Progreen

175/70R 14
175/70R 14 RF
185/70R 14
175/65R 14
175/65R 14 RF
185/65R 14
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
205/65R 15
185/60R 14
185/60R 15
185/60R 15 RF
195/60R 15
205/60R 16
215/60R 16
185/55R 14
185/55R 15
195/55R 15
195/55R 16
205/55R 16
195/50R 15
195/50R 16 RF



## PT 535 Imperium

175/70R 14
175/65R 14
185/65R 14
185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
185/60R 15
185/60R 15 RF
195/60R 15
195/55R 16
205/55R 16
195/50R 16





## PT 711 Velox Sport

185/60R 13
185/55R 14
185/55R 15
195/55R 15
205/55R 15
195/55R 16
205/55R 16
205/55ZR 16 RF
215/55ZR 16 RF
225/55R 16
225/55ZR 17
195/50R 15
205/50ZR 15
195/50R 16
205/50ZR 16 RF
225/50ZR 16 RF
205/50ZR 17 RF
215/50ZR 17
225/50ZR 17 RF
195/45R 14
195/45R 15
205/45R 15
195/45R 16
205/45ZR 16 RF
205/45ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF
245/45ZR 17 RF
225/45ZR 18 RF
245/45ZR 18 RF
205/40ZR 16 RF
215/40ZR 16 RF
225/40ZR 16
205/40ZR 17 RF
215/40ZR 17 RF
235/40ZR 17 RF
245/40ZR 17 RF
215/40ZR 18 RF
225/40ZR 18 RF
235/40ZR 18 RF
245/40ZR 18
225/40ZR 19
245/40ZR 19 RF
255/40ZR 19 RF
215/35ZR 18 RF
225/35ZR 18 RF
265/35ZR 18 RF
225/35ZR 19 RF



## PT 721 Velox Sport

205/55R 16



## PT 731 Velox Sport

205/55R 16



## PT 741 Velox Sport

215/60R 16 RF
225/60R 16
235/60ZR 16
185/55R 14
185/55R 15
195/55R 15
185/55R 16 RF
195/55R 16
195/55 RF16 **RFT**
205/55ZR 16 RF
205/55 RF16 **RFT**
215/55ZR 16 RF
225/55ZR 16 RF
205/55ZR 17
215/55ZR 17 RF
225/55ZR 17 RF
225/55ZR 17 **RFT**
235/55ZR 17 RF
235/55ZR 18 RF
195/50R 15
195/50R 16
205/50ZR 15
205/50ZR 16 RF
225/50ZR 16 RF
205/50ZR 17 RF
205/50RF 17 **RFT**
215/50ZR 17 RF
225/50ZR 17 RF
225/50 RF17 **RFT**
235/50ZR 18 RF
245/50ZR 18
245/50 RF18 **RFT**
195/45R 16 RF
205/45ZR 16 RF
215/45R 16 RF
205/45ZR 17 RF
215/45ZR 17 RF
225/45ZR 17 RF
225/45RF 17 **RFT**
235/45ZR 17 RF
245/45ZR 17 RF
215/45ZR 18 RF
225/45ZR 18 RF
225/45RF18 **RFT**
235/45ZR 18 RF
245/45ZR 18 RF
245/45RF 18 **RFT**
255/45ZR 18 RF
275/45ZR 18 RF
225/45ZR 19 RF
235/45ZR 19 RF
245/45ZR 19 RF
245/45ZR 19 **RFT**
255/45ZR 19 RF
205/40ZR 16 RF
205/40ZR 17 RF
215/40ZR 16 RF
215/40ZR 17 RF
235/40ZR 17 RF
245/40ZR 17 RF
215/40ZR 17 RF
215/40ZR 18 RF
225/40ZR 18 RF
225/40ZR 18 **RFT**
235/40ZR 18 RF
245/40ZR 18 RF
245/40RF 18 **RFT**
255/40ZR 18
225/40ZR 19 RF
245/40ZR 19 RF
245/40ZR 19 **RFT**
245/40ZR 20 RF
255/40ZR 20 RF
255/40ZR 19 RF
275/40ZR 18 RF
275/40ZR 19 RF
265/40ZR 19 RF
285/40ZR 19 RF
245/35ZR 17
215/35ZR 18 RF
225/35ZR 18 RF
245/35ZR 18 RF
255/35ZR 18 RF
265/35ZR 19 RF
265/35ZR 18 RF
275/35ZR 18 RF
215/35ZR 19 RF
225/35ZR 19 RF
235/35ZR 19 RF
245/35ZR 19 RF
255/35ZR 19 RF
255/35RF 19 **RFT**
275/35ZR 19 RF
245/35ZR 20 RF
255/35ZR 20 RF
275/35R 19 **RFT**
255/30ZR 19 RF
265/30ZR 19 RF
275/30ZR 19 RF
275/30ZR 20 RF
275/45R 18*
275/45R 18*
275/45R 18 **RFT***
215/40R 18 **RFT***
225/40R 18 **RFT***
225/40R 19 **RFT***
245/40R 20 **RFT***
255/40R 18 **RFT***
265/40R 18*
275/40R 18*
275/40R 18 **RFT***
275/40R 19 **RFT***
205/35R 18*
225/35R 19*
225/35R 19 **RFT***
225/35R 20*
225/35R 20 **RFT***
245/35R 18 **RFT***
245/35R 19 **RFT***
245/35R 20 **RFT***
255/35R 18 **RFT***
265/35R 19*
265/35R 20*
275/35R 18 **RFT***
275/35R 20 **RFT***
275/35R 20*
285/35R 18*
285/35R 18 **RFT***
285/35R 19*
285/35R 19 **RFT***
295/35R 18*
295/35R 19*
295/35R 20*
225/30R 20*
235/30R 20*
245/30R 19*
245/30R 19 **RFT***
245/30R 20*
255/30R 19 **RFT***
255/30R 20*
255/30R 20 **RFT***
265/30R 19*
265/30R 20*
275/30R 19*
275/30R 19 **RFT***
275/30R 20 **RFT***
285/30R 19*
285/30R 19 **RFT***
285/30R 20*
285/30R 20 **RFT***
295/30R 19*
295/30R 20*
305/30R 19*
305/30R 20*
285/25R 20*
295/25R 20*
305/25R 20*



RF: REINFORCED
RFT: RUN FLAT
* UNDER DEVELOPMENT

petlas

## W 601 Snow Master

155/80R 13
165/80R 13
175/80R 14
145/70R 13
155/70R 13
165/70R 13
165/70R 13 RF
175/70R 13
185/70R 13
165/70R 14
165/70R 14 RF
175/70R 14
175/70R 14 RF
185/70R 14
195/70R 14
195/70R 15 RF
155/65R 13
165/65R 13
175/65R 13
155/65R 14
165/65R 14
175/65R 14
175/65R 14 RF
185/65R 14
175/65R 15
165/60R 14

## W 651 Snow Master

185/65R 15
185/65R 15 RF
195/65R 15
195/65R 15 RF
205/65R 15
215/65R 15
205/65R 16
215/65R 16
215/65R 16 RF
185/60R 14
195/60R 14
185/60R 15
195/60R 15
205/60R 15
205/60R 16
215/60R 16
225/60R 16
235/60R 16
185/55R 14
185/55R 15
185/55R 16 RF
195/55R 15
195/55R 16
205/55R 15
205/55R 15 RF
205/55R 16
205/55RF 16 **RFT**
205/55R 17
215/55R 16
225/55R 16
215/55R 17 RF
225/55R 17
225/55R 17 RF
225/55RF 17 **RFT**
235/55R 17 RF
195/50R 15
205/50R 15
195/50R 16
205/50R 16
205/50R 16 RF
225/50R 16 RF
205/50R 17 RF
215/50R 17
215/50R 18
225/50R 17 RF
235/50R 19 RF
245/50R 18 RF
195/45R 16 RF
205/45R 16 RF
205/45R 17 RF
215/45R 17 RF
215/45R 16 RF
215/45R 18 RF
225/45R 17 RF
225/45R 18 RF
235/45R 17 RF
235/45R 18 RF
245/45R 17 RF
245/45R 18 RF
245/45R 19 RF
225/40R 18 RF
235/40R 18 RF
245/40R 17 RF
245/40R 18 RF
245/40R 19 RF
255/40R 19 RF
215/50R 18*
245/50R 18 RFT*
225/45R 18 RFT*
245/45R 18 RFT*
245/45R 19 RFT*
225/40R 18 RFT*
245/40R 19 RFT*



## PT555 Multi Action

175/65R 14*
185/65R 14*
185/65R 15*
195/65R 15*
205/65R 15*
185/60R 15*
195/60R 15*
205/60R 16*
185/55R 15*
195/55R 15*
195/55R 16*
205/55R 16*
215/55R 16*
225/55R 16*
225/55R 17*
205/50R 17*
215/50R 17*
225/50R 17*
225/45R 17*
225/45R 18*
235/45R 17*
235/45R 18*
245/45R 18*
225/40R 18*

## PT 411 A/S Explero

235/75R 15
205/70R 15
215/70R 15
215/70R 16
225/70R 16 RF
235/70R 16
245/70R 16
265/70R 16
255/70R 16
215/65R 16
215/65R 16 RF
215/65R 17
225/65R 17
235/65R 17 RF
245/65R 17 RF
255/65R 16
255/65R 17
265/65R 17
215/60R 16
225/60R 17 RF
235/60R 16

## PT 421 A/T Explero

215/80R 15
205/80R 16 RF
235/75R 15
235/70R 16
255/70R 15
265/70R 15 RF
245/70R 16 RF
215/65R 16
265/65R 17 RF
265/60R 18 RF



## PT 431 H/T Explero

235/65R 17 RF
215/60R 17
225/60R 18
235/60R 17
235/60R 18 RF
245/60R 18
255/60R 17
255/60R 18 RF
265/60R 18
215/55R 18
225/55R 19
225/55R 18
225/55R 17
235/55R 17 RF
235/55R 18
235/55R 19 RF
245/55R 19
255/55R 18 RF
255/55R 19 RF
275/55R 19
235/50R 18 RF
255/50R 19 RF
255/50ZR 19 RF **RFT**
265/50ZR 19 RF
275/45ZR 19 RF
275/45ZR 20 RF
285/45R 19
275/40ZR 20 RF
315/35ZR 20 RF*
315/35ZR 20 **RFT***











## W 671 Explero

205/80R 16 RF
215/80R 15
235/75R 15 RF
205/70R 15
215/70R 15
215/70R 16 RF
225/70R 16 RF
235/70R 16
245/70R 16 RF
255/70R 16
265/70R 16
215/65R 17
225/65R 17 RF
235/65R 17 RF
245/65R 17 RF
255/65R 17 RF
265/65R 17 RF
215/60R 17 RF
225/60R 17 RF
235/60R 17 RF
255/60R 17 RF
225/60R 18 RF
235/60R 18 RF
245/60R 18 RF
255/60R 18 RF
265/60R 18 RF
235/55R 17 RF
205/55R 19 RF
215/55R 18
225/55R 18 RF
235/55R 18 RF
255/55R 18 RF
225/55R 19
235/55R 19 RF
245/55R 19
255/55R 19 RF
275/55R 19
235/50R 18 RF
235/50R 19 RF
255/50R 19 RF
255/50 RF19 RF **RFT**
265/50R 20 RF
245/50R 20
225/45R 19 RF
275/45R 20 RF
285/45R 19 RF
275/40R 20 RF
315/35R 20 RF
255/55R 18 **RFT***
275/40R 20 **RFT***
315/35R 20*
315/35R 20 **RFT***



## PT 825 Full Power

195R 14 C
195R 15 C
225/70R 15 C



## PT 825 Full Power Plus

5.00R 12 C
155R 12 C
155R 13 C
185R 14 C
195R 14 C
185R 15 C
175/75R 16 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
225/75R 16 C
165/70R 14 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
205/65R 15 C
205/65R 16 C
205/65R 15 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C



## PT 835 Full Power

205/75R 16 C
215/75R 16 C
225/70R 15 C
195/65R 16 C
205/65R 16 C
215/65R 15 C
215/65R 16 C
235/65R 16 C
285/65R 16 C
195/60R 16 C



## PT 875 Advente

155R 12 C
155R 13 C
185R 14 C
195R 14 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
205/65R 15 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C



## PT 925 Full Grip

155R 12 C
155R 13 C
185R 14 C
195R 14 C
175/75R 16 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
215/70R 15 C
225/70R 15 C
205/65R 15 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C
195/60R 16 C



## PT 935 Full Grip

155R 12 C
155R 13 C
185R 14 C
195R 14 C
185/75R 16 C
195/75R 16 C
205/75R 16 C
215/75R 16 C
225/75R 16 C
195/70R 15 C
205/70R 15 C
225/70R 15 C
215/65R 15 C
195/65R 16 C
205/65R 16 C
215/65R 16 C
225/65R 16 C
235/65R 16 C
285/65R 16 C
195/60R 16 C



## PT 945 Full Grip

215/75R 16 C *
235/65R 16 C *



RF: REINFORCED
RFT: RUN FLAT
* UNDER DEVELOPMENT

petlas

There are certain markings on the sidewall of tires. You shall find these notices and properties below;

## DOT Symbol:
Proves that tyre complies with DOT regulations.

## European Commision of Economics Confirmation :
It is the legitimate proof that tires comply with all ECE directives and is represented by a common and unique confirmation number due to regulation.

## Max. Load and Pressure Markings:
It is a necessary marking on sidewalls of tires which complies with DOT directives It consists of necessary information about max.load and pressure of tyres.

## "Europen Commision of Economics" Tire Verification Symbol:
This symbol proves that the tyre complies with all necessary standards disclaimed by Europen Commision of Economics.

## Construction Info:
It represents type of material used in sidewall and base in accordance with DOT regulation.

## UTQG Quality Indicator:
- Wear Life Indicator: a tire when tested under standard conditions, wear life as 100 according to the test tire life indicates proportionate . Tire life usage patterns, climate and road conditions may change significantly depending on the servic properties.


- Traction Class Indicator: Under controlled conditions demonstrated the ability to stand on the rubber surface is wet. Traction grades, from highest to lowest are AA, A, B and C.

- Heat Resistance Indicator : Tire's resistance to heat and shows the ability to throw heat. Traction grades, from highest to lowest are AA, A, B and C.

## Speed class and load index :
European ETRTO standards maximum load and maximum load the tire can be based on the maximum rate based on the mark is indicating.




1 – Brand Logo
2 – Construction Information
3 – Manufacturing Country
4 – Max. Load and Pressure Rating
5 – Mold No
6 – Construction Type
7 – DOT Mark
8 – Factory Code
9 – Tubeless
10 – Product Code
11 – Date of Manufacture
12 – ECE approval mark
13 – Speed Index
14 – Safety Warnings
15 – Outside
16 – ECE approval number
17 – Max. Load Index
18 – Tire Size
19 – Pattern Name
20 – Temperature Resistance Index
21 – Tire Road Grip Index
22 – Tire Wear Index Resistance
23 – UTQG Quality Indicator

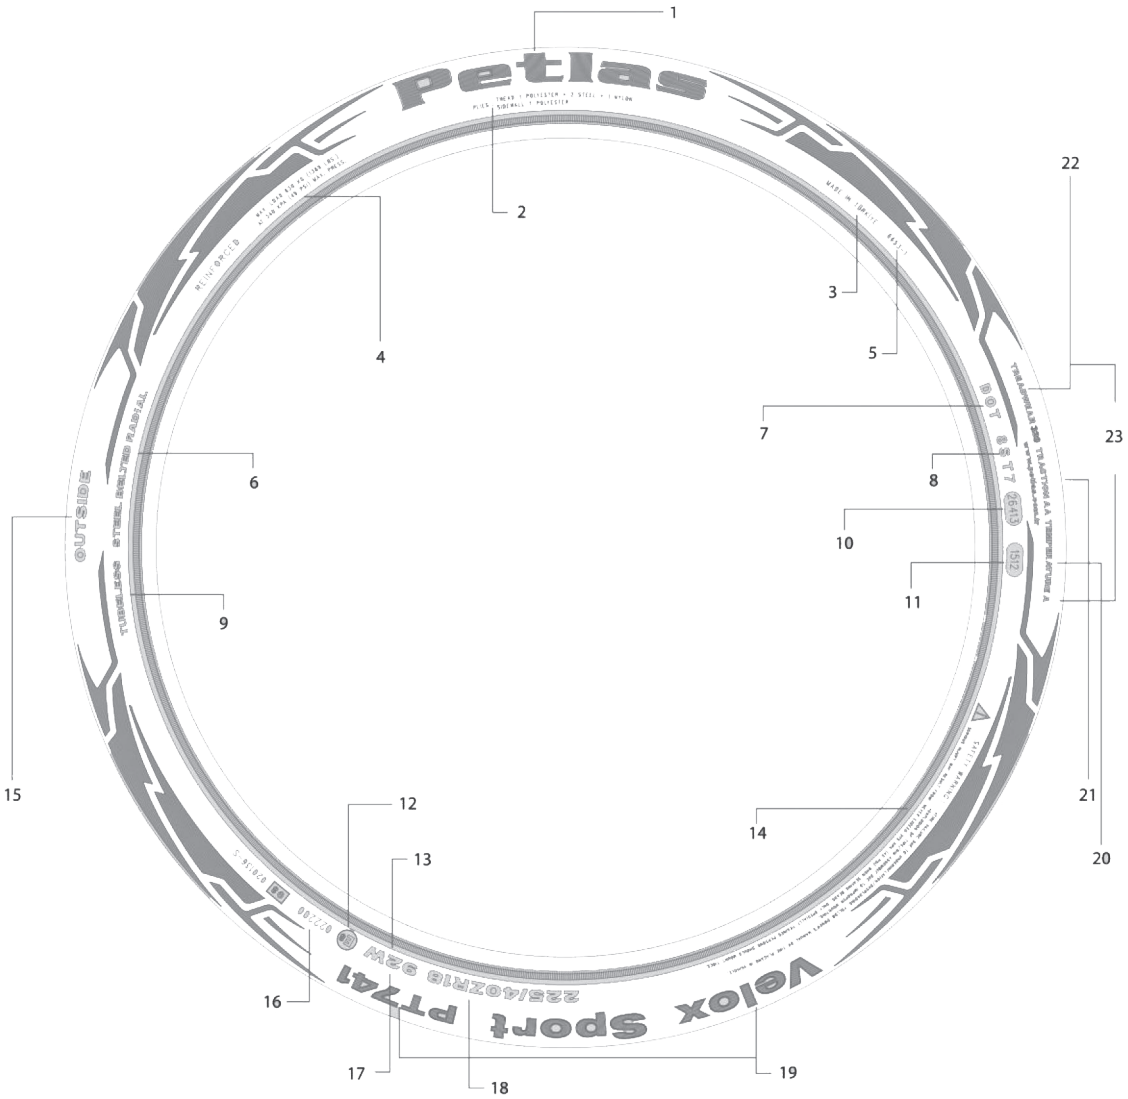


Go Forth
Take the wheel. Explore the world.
All the roads are yours.
Go forth with Petlas PCR tires.
petlas
www.petlas.com

# RADIAL TIRE CONSTRUCTION

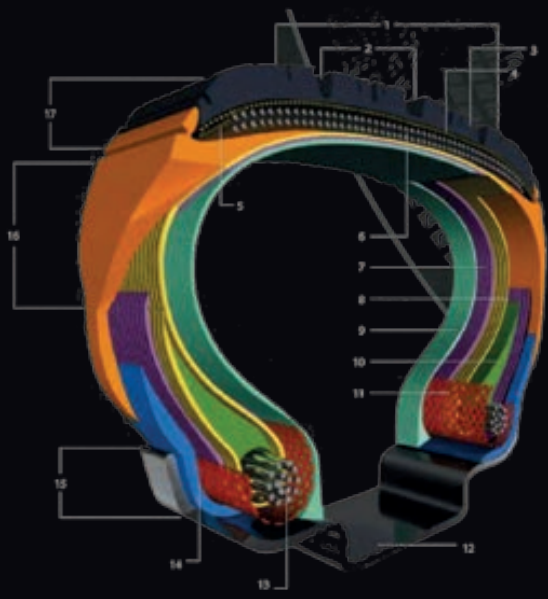

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Innerliner
10. Bead Filling
11. Bead Reinforcement fabric
12. Rim
13. Bead Wire
14. Rim Cushion
15. Rim Flange
16. Sidewall
17. Shoulder


# IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standart inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.

## EXAMPLE :

Tire size 225/40ZR 18 92W


- Cross – section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no; each producer's coding consisting of the production data
- Abrasion indicator (TWI)
- Usable in a tubeless way or with the tubetype usage
- U.S. Department of Transportation compliance symbol (DOT)
- Europen Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

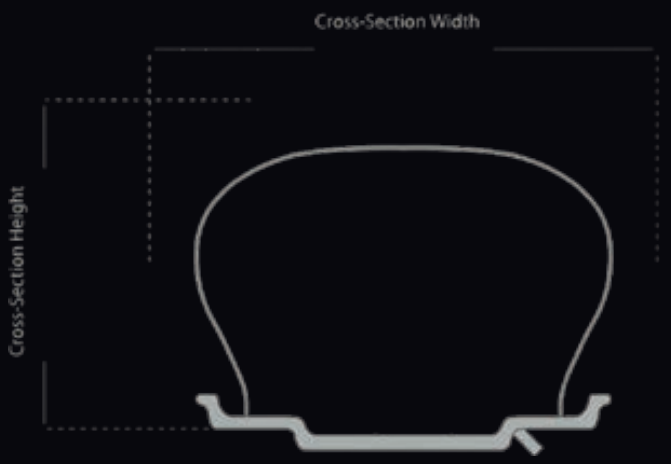


petlas

## TIRE SIZE

## CHARACTERISTICS OF USAGE

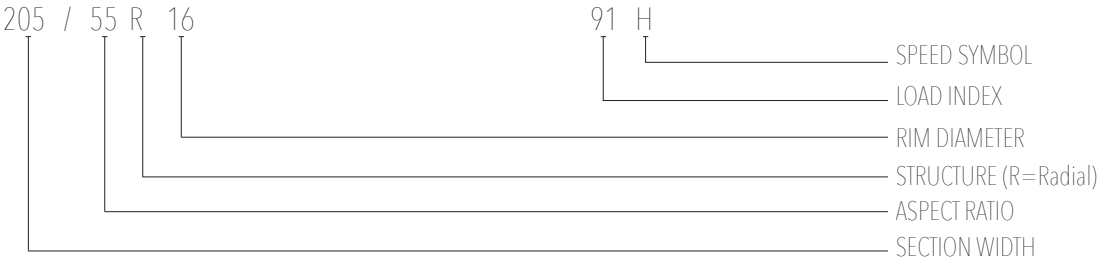




### Speed Symbol Table

It is the alphabetical code of the velocity which the tire can perform.

| Speed Symbol | Speed Limit (km/h) | Speed Symbol | Speed Limit (km/h) | Speed Symbol | Speed Limit (km/h) |
|---|---|---|---|---|---|
| A1 | 5 | D | 65 | Q | 160 |
| A2 | 10 | E | 70 | R | 170 |
| A3 | 15 | F | 80 | S | 180 |
| A4 | 20 | G | 90 | T | 190 |
| A5 | 25 | J | 100 | U | 200 |
| A6 | 30 | K | 110 | H | 210 |
| A7 | 35 | L | 120 | V | 240 |
| A8 | 40 | M | 130 | W | 270 |
| B | 50 | N | 140 | Y | 300 |
| C | 60 | P | 150 | ZR | 270 km+ |



## Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

| A | B | A | B | A | B | A | B | A | B | A | B |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 60 | 250 | 96 | 710 | 132 | 2000 | 168 | 5600 | 204 | 16000 | 240 | 45000 |
| 61 | 257 | 97 | 730 | 133 | 2060 | 169 | 5800 | 205 | 16500 | 241 | 46250 |
| 62 | 265 | 98 | 750 | 134 | 2120 | 170 | 6000 | 206 | 17000 | 242 | 47500 |
| 63 | 272 | 99 | 775 | 135 | 2180 | 171 | 6150 | 207 | 17500 | 243 | 48750 |
| 64 | 280 | 100 | 800 | 136 | 2240 | 172 | 6300 | 208 | 18000 | 244 | 50000 |
| 65 | 290 | 101 | 825 | 137 | 2300 | 173 | 6500 | 209 | 18500 | 245 | 51500 |
| 66 | 300 | 102 | 850 | 138 | 2360 | 174 | 6700 | 210 | 19000 | 246 | 53000 |
| 67 | 307 | 103 | 875 | 139 | 2430 | 175 | 6900 | 211 | 19500 | 247 | 54500 |
| 68 | 315 | 104 | 900 | 140 | 2500 | 176 | 7100 | 212 | 20000 | 248 | 56000 |
| 69 | 325 | 105 | 925 | 141 | 2575 | 177 | 7300 | 213 | 20600 | 249 | 58000 |
| 70 | 335 | 106 | 950 | 142 | 2650 | 178 | 7500 | 214 | 21200 | 250 | 60000 |
| 71 | 345 | 107 | 975 | 143 | 2725 | 179 | 7750 | 215 | 21800 | 251 | 61500 |
| 72 | 355 | 108 | 1000 | 144 | 2800 | 180 | 8000 | 216 | 22400 | 252 | 63000 |
| 73 | 365 | 109 | 1030 | 145 | 2900 | 181 | 8250 | 217 | 23000 | 253 | 65000 |
| 74 | 375 | 110 | 1060 | 146 | 3000 | 182 | 8500 | 218 | 23600 | 254 | 67000 |
| 75 | 387 | 111 | 1090 | 147 | 3075 | 183 | 8750 | 219 | 24300 | 255 | 69000 |
| 76 | 400 | 112 | 1120 | 148 | 3150 | 184 | 9000 | 220 | 25000 | 256 | 71000 |
| 77 | 412 | 113 | 1150 | 149 | 3250 | 185 | 9250 | 221 | 25750 | 257 | 73000 |
| 78 | 425 | 114 | 1180 | 150 | 3350 | 186 | 9500 | 222 | 26500 | 258 | 75000 |
| 79 | 437 | 115 | 1215 | 151 | 3450 | 187 | 9750 | 223 | 27250 | 259 | 77500 |
| 80 | 450 | 116 | 1250 | 152 | 3550 | 188 | 10000 | 224 | 28000 | 260 | 80000 |
| 81 | 462 | 117 | 1285 | 153 | 3650 | 189 | 10300 | 225 | 29000 | 261 | 82500 |
| 82 | 475 | 118 | 1320 | 154 | 3750 | 190 | 10600 | 226 | 30000 | 262 | 85000 |
| 83 | 487 | 119 | 1360 | 155 | 3875 | 191 | 10900 | 227 | 30750 | 263 | 87500 |
| 84 | 500 | 120 | 1400 | 156 | 4000 | 192 | 11200 | 228 | 31500 | 264 | 90000 |
| 85 | 515 | 121 | 1450 | 157 | 4125 | 193 | 11500 | 229 | 32500 | 265 | 92500 |
| 86 | 530 | 122 | 1500 | 158 | 4250 | 194 | 11800 | 230 | 33500 | 266 | 95000 |
| 87 | 545 | 123 | 1550 | 159 | 4375 | 195 | 12150 | 231 | 34500 | 267 | 97500 |
| 88 | 560 | 124 | 1600 | 160 | 4500 | 196 | 12500 | 232 | 35500 | 268 | 100000 |
| 89 | 580 | 125 | 1650 | 161 | 4625 | 197 | 12850 | 233 | 36500 | 269 | 103000 |
| 90 | 600 | 126 | 1700 | 162 | 4750 | 198 | 13200 | 234 | 37500 | 270 | 106000 |
| 91 | 615 | 127 | 1750 | 163 | 4875 | 199 | 13600 | 235 | 38750 | 271 | 109000 |
| 92 | 630 | 128 | 1800 | 164 | 5000 | 200 | 14000 | 236 | 40000 | 272 | 112000 |
| 93 | 650 | 129 | 1850 | 165 | 5150 | 201 | 14500 | 237 | 41250 | 273 | 115000 |
| 94 | 670 | 130 | 1900 | 166 | 5300 | 202 | 15000 | 238 | 42500 | 274 | 118000 |
| 95 | 690 | 131 | 1950 | 167 | 5450 | 203 | 15500 | 239 | 43750 | 275 | 121500 |

(A) Load Index
(B) The weight a tyre can carry (kg)



PT 311

SUMMER



PT 515

SUMMER



PT 525

SUMMER



PT 535

SUMMER WINTER



PT 711

SUMMER






PASSENGER CAR TIRES

| PT 721 | PT 731 | PT 741 | W 601 | W 651 | PT 555 |
|---|---|---|---|---|---|
| | | | | | UNDER DEVELOPMENT |
| SUMMER | SUMMER | SUMMER | WINTER | WINTER | SUMMER WINTER |



# PT 311 Elegant

Developed for performance and handling for the general use segment.
Offer traction and riding comfort combining with durability.



## DESIGNED FOR OPTIMAL DRIVING PERFORMANCE









### PATTERN PROPERTIES

- Circumferential rib on the tread center improves handling and braking performance
- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.
- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.
- Depending on the size of the tire, three or four different grooves provide excellent water drainage, and reduce the risk of aquaplaning significantly.






SUMMER






●●

## ALL SIZES

PT 311 Elegant

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 155/80R 12 | 77T | 145/70R 13 | 71T | 185/70R 14 | 88T●● | 185/65R 14 | 86T●● |
| 155/80R 13 | 79T | 155/70R 13 | 75T | 195/70R 14 | 91T●● | 195/65R 14 | 89H●● |
| 165/80R 13 | 83T | 165/70R 13 | 79T | 195/70R 15 RF | 97T●● | 175/65R 15 | 84T |
| 165/80R 13 RF | 87R | 165/70R 13 RF | 83T | 155/65R 13 | 73T | 185/65R 15 | 88T●● |
| 175/80R 14 | 88T | 175/70R 13 | 82T | 165/65R 13 | 77T | 195/65R 15 RF | 95T●● |
| 165/80R 15 | 87T | 185/70R 13 | 86T●● | 175/65R 13 | 80T | 195/65R 15 | 91T●● |
| 145/70R 12 | 69T | 165/70R 14 | 81T | 155/65R 14 | 75T | 165/60R 14 | 75T |
| 155/70R 12 | 73T | 165/70R 14 RF | 85R | 165/65R 14 | 79T | | |
| 165/70R 12 | 77T | 175/70R 14 | 84T | 175/65R 14 | 82T | | |
| 175/70R 12 | 80T | 175/70R 14 RF | 88T | 175/65R 14 RF | 86T | | |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions. |
| High Tech Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 515 Imperium

Designed and produced with latest technology. It offers good braking performance in both wet and dry conditions, also good mileage.



## DESIGNED FOR EXCEPTIONAL GRIP IN WET AND DRY CONDITIONS











### PATTERN PROPERTIES

- Plain block attached to the shoulder provides excellent handling and braking performance.
- Increased number of tread blocks enables efficient discharge of water.
- Shoulder blocks offer high cornering performance at high speeds.
- Inner and outer lateral channels minimize noise and enable smooth and silent drive.
- Grooves provide excellent water discharge.





SUMMER






## ALL SIZES

## PT 515 Imperium

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 175/70R 13 | 82H | 195/65R 15 | 91V | 175/60R 13 | 77H | 205/60R 16 | 92H | 225/55ZR 16 | 95W |
| 175/70R 14 | 84H | 195/65R 15 | 91H | 185/60R 14 | 82H | 205/60R 16 | 92V | 225/55ZR 17 | 97W |
| 175/70R 14 RF | 88H | 195/65R 15 RF | 95H | 195/60R 14 | 86H | 185/55R 15 | 82V | 195/50R 15 | 82V |
| 185/70R 14 | 88H | 205/65R 15 | 94H | 185/60R 15 | 84H | 195/55R 15 | 85V | 205/50R 15 | 86V |
| 175/65R 14 | 82H | 205/65R 15 | 94V | 185/60R 15 RF | 88H | 205/55R 15 | 88V | 205/50ZR 16 | 87W |
| 175/65R 14 RF | 86T | 205/65R 15 RF | 99H | 195/60R 15 | 88H | 195/55R 16 | 87V | 205/50ZR 17 RF | 93W |
| 185/65R 14 | 86H | 215/65R 15 | 96V | 195/60R 15 | 88V | 205/55R 16 | 91H | 225/50ZR 17 RF | 98W |
| 175/65R 15 | 84H | 205/65R 16 | 95H | 205/60R 14 | 88V | 205/55R 16 | 91V | 215/45ZR 17 RF | 91W |
| 185/65R 15 | 88H | 215/65R 16 | 98H | 205/60R 15 | 91H | 215/55R 16 | 93H | 225/45ZR 17 RF | 94W |
| 185/65R 15 RF | 92H | 215/65R 16 | 98V | 205/60R 15 | 91V | 215/55R 16 | 93V | | |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption |
| High Tech Construction | Jointless "0" degree spiral nylon cover and wide steel belts | High driving safety, comfort and durability. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 525 Progreen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance




## ECO-FRIENDLY TIRE DESIGNED FOR ULTIMATE TRACTION AND HANDLING

### PATTERN PROPERTIES



Thanks to its asymmetrical pattern design enables high performance on both wet and dry conditions.



Low rolling resistance by specially developed tread compound.



Special tread blocks minimize road noise.



Three grooves offer fast and effective discharge of water.





SUMMER





## ALL SIZES

PT 525 Progreen

| | | |
|---|---|---|
| 175/70R 14 84T | 195/65R 15 91H | 215/60R 16 95V |
| 175/70R 14RF 88T | 195/65R 15 91V | 185/55R 14 80H |
| 185/70R 14 88T | 195/65R 15RF 95T | 185/55R 15 82V |
| 175/65R 14 82T | 205/65R 15 94H | 195/55R 15 85H |
| 175/65R 14RF 86T | 185/60R 14 82H | 195/55R 16 87H |
| 185/65R 14 86T | 185/60R 15 84H | 205/55R 16 91H |
| 185/65R 15 88T | 185/60R 15RF 88H | 195/50R 15 82H |
| 185/65R 15 88H | 195/60R 15 88H | 195/50R 16RF 88V |
| 185/65R 15RF 92H | 205/60R 16 92H | |
| 195/65R 15 91T | 205/60R 16 92V | |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improve uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 535 Imperium

All season car tire which combines high performance on wet and dry conditions. Offers very good riding comfort and high mileage.




## MAXIMUM MILEAGE PERFORMANCE






### PATTERN PROPERTIES

- Center rib on the center enables handling and braking performance.
- Better grip and traction on wet surface with optimized sipe density.
- Computer simulated block array minimizes road /pattern noise and enhances driving comfort.
- Four grooves offer fast and effective discharge of water.





M+S WINTER SUMMER





## ALL SIZES

PT 535 Imperium

| | |
|---|---|
| 175/70R 14 | 84H |
| 175/65R 14 | 82H |
| 185/65R 14 | 86H |
| 185/65R 15 | 88H |
| 185/65R 15RF | 92H |
| 195/65R 15 | 91H |
| 195/65R 15RF | 95H |

| | |
|---|---|
| 185/60R 15 | 84H |
| 185/60R 15RF | 88H |
| 195/60R 15 | 88H |
| 205/55R 16 | 91H |
| 195/55R 16 | 87H |
| 195/50R 16 | 84H |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Patial silica tread compound developed through FST technology provides high handling performance on dy and wet road conditions. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improve uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 711 Velox Sport

Designed and developed for ultra-high performance sport cars. Its aggressive pattern design and construction increase handling performance on both wet and dry surfaces.




## FEEL THE TORQUE WITH STYLISH PATTERN DESIGN







### PATTERN PROPERTIES

- Aggressive pattern design.
- Strong shoulder blocks offer exceptional cornering performance at high speeds.
- V Shaped main grooves discharge water effectively on wet surfaces.





SUMMER






## ALL SIZES

## PT 711 Velox Sport

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 185/60R 13 | 80H | 225/55R 16 | 95V | 195/45R 15 | 78V | 215/40ZR 16 RF | 86W | 235/40ZR 18 RF | 95W |
| 185/55R 14 | 80H | 225/55ZR 17 | 97W | 205/45R 15 | 81V | 225/40ZR 16 | 85W | 225/40ZR 19 | 89W |
| 185/55R 14 | 80V | 195/50R 15 | 82V | 195/45R 16 | 80V | 245/40ZR 17 RF | 95W | 245/40ZR 19 RF | 98W |
| 185/55R 15 | 82H | 205/50ZR 15 | 86W | 205/45ZR 16 RF | 87W | 205/40ZR 17 RF | 84W | 255/40ZR 19 RF | 100W |
| 185/55R 15 | 82V | 195/50R 16 | 84V | 205/45ZR 17 RF | 88W | 215/40ZR 17 RF | 87W | 215/35ZR 18 RF | 84W |
| 195/55R 15 | 85V | 205/50ZR 16 RF | 91W | 215/45ZR 17 RF | 91W | 235/40ZR 17 RF | 94W | 225/35ZR 18 RF | 87W |
| 205/55R 15 | 88V | 225/50ZR 16 RF | 96W | 225/45ZR 17 RF | 94W | 215/40ZR 18 RF | 89W | 265/35ZR 18 RF | 97W |
| 195/55R 16 | 87V | 205/50ZR 17 RF | 93W | 245/45ZR 17 RF | 99W | 225/40ZR 18 RF | 92W | 225/35ZR 19 RF | 88W |
| 205/55R 16 | 91V | 215/50ZR 17 | 91W | 225/45ZR 18 RF | 95W | 235/40ZR 18 RF | 95W | | |
| 205/55ZR 16 RF | 94W | 225/50ZR 17 RF | 98W | 245/45ZR 18 RF | 100W | 245/40ZR 18 | 93W | | |
| 215/55ZR 16 RF | 97W | 195/45R 14 | 77V | 205/40ZR 16 RF | 83W | | | | |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. rolling resistance is reduced significantly,R esulting in lowe RFuel consumption. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improve uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 721 Velox Sport

Special pattern design decreases noise and increase handling, also very good cornering performance at high speed levels. The outer shoulder construction increases the amount of surface area contacting the road. The inner shoulder increases the contact patch for better braking performance and stability.




## OPTIMAL PERFORMANCE IN DRY AND WET CONDITIONS



### PATTERN PROPERTIES

- Fast and effective water discharge thanks to its three grooves.
- Special pattern design enables very good braking performance.
- Offers high performance on both dry and wet surfaces.
- Wide shoulder blocks increase the surface amount and grip performance of the tire.
- Outer shoulder design provides outstanding grip performance both wet and dry surfaces.
- Special tread compound minimizes pattern noise and offers high mileage.



SUMMER





## SIZE

## PT 721 Velox Sport

205/55R 16 91V



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | High driving safety, comfort and durability. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 731 Velox Sport

Esthetic pattern design blends performance, comfort and quality. Designed for ultra-high performance cars. Computer simulated pattern and special tread compound enable optimum performance on wet and dry road conditions.



## DRIVING COMFORT WITH SPECIAL PATTERN DESIGN

### PATTERN PROPERTIES



- Center block provides stable and a balanced drive.



- Ultimate performance on both dry and wet surfaces thanks to its asymmetrical pattern design.



- Wide shoulder blocks increase the surface amount and grip performance of the tire.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stablity of the vehicle.



- Special tread compound minimizes pattern noise and offers high mileage.



- Fast and effective discharge of water thanks to three grooves.



SUMMER






## ALL SIZES

# PT 731 Velox Sport

| | |
|---|---|
| 205/55R 16 | 91H |
| 205/55R 16 | 91V |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | High driving safety, comfort and durability. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 741 Velox Sport

PT741 is produced for drivers who desire ultimate handling and grip performance without compromising comfort during driving at high speeds




## DESIGNED FOR OUTSTANDING HANDLING AND GRIP PERFORMANCE

### PATTERN PROPERTIES



Wide center rib increases straight line performance and cornering response effectively on high speeds.



Special tread design with large blocks increase and improve handling and steering response.



Offers effective short braking and high performance on both wet and dry surfaces thanks to its asymmetrical pattern.



In assertive sizes of PT741 rayon carcass, aramid and nylon belts are used. Rayon carcass improves the response of tires from wheel inputs aramid and nylon belts improve the tire footprint at higher speeds.



Outstanding performance on wet surfaces thanks to its wide straight three channel grooves provides effective discharge of water.



SUMMER






Specially designed tread profile enables exceptional high – speed capabilities , superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability. PT741 is developed for a wide range, from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption. |
| High Tech Cap Ply Construction | Jonitless "0" degree spiral Aramid-Nylon Hybrid Layer and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. Hybrid layer improves highspeed stability and cornering at high speeds |
| Rayon Carcass Ply | Rayon cords are used in carcass plies. | Rayon cords, thanks to its low elongation, improves tire's response to wheel imputs. |

# PT 741 VELOX SPORT



SUMMER

## ALL SIZES

# PT 741 Velox Sport

| | | |
|---|---|---|
| 215/60 R16 RF | 99V | |
| 225/60 R16 | 98V | |
| 235/60 ZR16 | 100W | |
| 185/55 R14 | 80V | |
| 185/55 R15 | 82V | |
| 195/55 R15 | 85V | |
| 185/55 R16 RF | 87H | |
| 195/55 R16 | 87V | |
| 195/55 R16 **RFT** | 87V | |
| 205/55 R16 **RFT** | 91V | |
| 205/55 ZR16 RF | 94W | |
| 215/55 ZR16 RF | 97W | |
| 225/55 ZR16 RF | 99W | |
| 205/55 ZR17 | 91W | |
| 215/55 ZR17 RF | 98W | |
| 225/55 ZR17 RF | 101W | |
| 225/55 ZR17 **RFT** | 97W | |
| 235/55 ZR17 RF | 103W | |
| 235/55 ZR18 RF | 104W | |
| 195/50 R15 | 82V | |
| 205/50 ZR15 | 86W | |
| 195/50 R16 | 84V | |
| 205/50 ZR16 RF | 91W | |
| 225/50 ZR16 RF | 96W | |
| 205/50 ZR17 RF | 93W | |
| 205/50 ZR17 **RFT** | 89W | |
| 215/50 ZR17 RF | 95W | |
| 225/50 ZR17 RF | 98W | |
| 225/50 ZR17 **RFT** | 94W | |
| 235/50 ZR18 RF | 101W | |
| 245/50 ZR18 | 100W | |
| 245/50 RF18 **RFT** | 100W | |
| 195/45 R16 RF | 84V | |
| 205/45 ZR16 RF | 87W | |
| 215/45 R16 RF | 90V | |
| 205/45 ZR17 RF | 88W | |
| 215/45 ZR17 RF | 91W | |
| 225/45 ZR17 RF | 94W | |
| 225/45 ZR17 **RFT** | 91W | |
| 235/45 ZR17 RF | 97W | |
| 245/45 ZR17 RF | 99W | |
| 215/45 ZR18 RF | 93W | |
| 225/45 ZR18 RF | 95W | |
| 225/45 ZR18 **RFT** | 91W | |
| 235/45 ZR18 RF | 98W | |
| 245/45 ZR18 RF | 100W | |
| 245/45 ZR18 **RFT** | 96W | |
| 255/45 ZR18 RF | 103W | ●● |
| 275/45 ZR18 RF | 107W | ●● |
| 225/45 ZR19 RF | 96W | |
| 235/45 ZR19 RF | 99W | |
| 245/45 ZR19 RF | 102W | |
| 245/45 ZR19 **RFT** | 98W | |
| 255/45 ZR19 RF | 104Y | ●● |
| 205/40 ZR16 RF | 83W | |
| 215/40 ZR16 RF | 86W | |
| 205/40 ZR17 RF | 84W | |
| 215/40 ZR17 RF | 87W | |
| 235/40 ZR17 RF | 94W | |
| 245/40 ZR17 RF | 95W | |
| 215/40 ZR18 RF | 89W | |
| 225/40 ZR18 RF | 92W | |
| 235/40 ZR18 RF | 95W | |
| 245/40 ZR18 | 93W | |
| 245/40 ZR18 **RFT** | 93W | |
| 255/40 ZR18 | 95W | ●● |
| 275/40 ZR18 RF | 103Y | ●● |
| 225/40 ZR19 RF | 93W | |
| 245/40 ZR19 RF | 98W | |
| 245/40 ZR19 RFT | 94W | |
| 255/40 ZR19 RF | 100W | ●● |
| 265/40 ZR19 RF | 102W | ●● |
| 275/40 ZR19 RF | 105Y | |
| 285/40 ZR19 RF | 107W | |
| 245/40 ZR20 RF | 99W | |
| 255/40 ZR20 RF | 101W | ●● |
| 245/35 ZR17 | 87W | |
| 215/35 ZR18 RF | 84W | |
| 225/35 ZR18 RF | 87W | |
| 245/35 ZR18 RF | 92W | |
| 255/35 ZR18 RF | 94W | ●● |
| 265/35 ZR18 RF | 97W | ●● |
| 275/35 ZR18 RF | 99W | ●● |
| 215/35 ZR19 RF | 85W | |
| 225/35 ZR19 RF | 88W | |
| 235/35 ZR19 RF | 91W | |
| 245/35 ZR19 RF | 93W | |
| 255/35 ZR19 **RFT** | 92W | ●● |
| 255/35 ZR19 RF | 96W | ●● |
| 265/35 ZR19 RF | 98W | ●● |
| 275/35 ZR19 RF | 100W | ●● |
| 275/35RF 19 **RFT** | 96W | ●● |
| 245/35 ZR20 RF | 95W | |
| 255/35 ZR20 RF | 97W | ●● |
| 255/30 ZR19 RF | 91W | ●● |
| 265/30 ZR19 RF | 93W | ●● |
| 275/30ZR 19 RF | 96W | ●● |
| 275/30ZR 20 RF | 97W | ●● |
| 235/55R 18* | | |
| 275/45R 18 **RFT*** | | |
| 235/45R 19* | | |
| 255/45R 19* | | |
| 275/45R 18* | | |
| 215/40R 18 **RFT*** | | |
| 225/40R 18 **RFT*** | | |
| 225/40R 19 **RFT*** | | |
| 245/40R 20* | | |
| 245/40R 20 **RFT*** | | |
| 255/40R 18* | | |
| 255/40R 18 **RFT*** | | |
| 255/40R 20* | | |
| 265/40R 18* | | |
| 265/40R 19* | | |
| 275/40R 18* | | |
| 275/40R 18 **RFT*** | | |
| 275/40R 19* | | |
| 285/40R 19* | | |
| 205/35R 18* | | |
| 225/35R 19* | | |
| 225/35R 19 **RFT*** | | |
| 225/35R 20* | | |
| 225/35R 20 **RFT*** | | |
| 245/35R 18 **RFT*** | | |
| 245/35R 19 **RFT*** | | |
| 245/35R 20 **RFT*** | | |
| 255/35R 18 **RFT*** | | |
| 265/35R 19* | | |
| 265/35R 20* | | |
| 275/35R 18 **RFT*** | | |
| 275/35R 19 **RFT*** | | |
| 275/35R 20* | | |
| 285/35R 19* | | |
| 285/35R 18* | | |
| 285/35R 18 **RFT*** | | |
| 285/35R 19 **RFT*** | | |
| 295/35R 18* | | |
| 295/35R 19* | | |
| 295/35R 20* | | |
| 225/30R 20* | | |
| 235/30R 20* | | |
| 245/30R 19* | | |
| 245/30R 19 **RFT*** | | |
| 245/30R 20* | | |
| 255/30R 19* | | |
| 255/30R 19 **RFT*** | | |
| 255/30R 20* | | |
| 255/30R 20 **RFT*** | | |
| 265/30R 20* | | |

RF: REINFORCED
**RFT**: RUN FLAT
*UNDER DEVELOPMENT

# W 601 Snow Master

High performance winter tire thanks to its tread pattern enables high traction capability on icy surfaces. Cornering and handling no more be a problem on slippery surfaces for drivers.




## GRIP THE ROAD SAFELY

### PATTERN PROPERTIES



Circumferential blocks improve braking performance.



Z shape sipes improve handling performance on snowy and icy surfaces.



Special tread compound minimizes pattern noise and offers high mileage.



Circumferential three grooves offer excellent water discharge.










## ALL SIZES

## W 601 Snow Master

| | |
|---|---|
| 155/80R 13 | 79T |
| 165/80R 13 | 83T |
| 175/80R 14 | 88T |
| 145/70R 13 | 71T |
| 155/70R 13 | 75T |
| 165/70R 13 | 79T |
| 165/70R 13 RF | 83T |
| 175/70R 13 | 82T |
| 185/70R 13 | 86T •• |
| 165/70R 14 | 81T |

| | |
|---|---|
| 165/70R 14 RF | 85R |
| 175/70R 14 | 84T |
| 175/70R 14 RF | 88T |
| 185/70R 14 | 88T •• |
| 195/70R 14 | 91T •• |
| 195/70R 15 RF | 97T •• |
| 155/65R 13 | 73T |
| 165/65R 13 | 77T |
| 175/65R 13 | 80T |
| 155/65R 14 | 75T |

| | |
|---|---|
| 165/65R 14 | 79T |
| 175/65R 14 | 82T |
| 175/65R 14 RF | 86T |
| 185/65R 14 | 86T •• |
| 175/65R 15 | 84T |
| 165/60R 14 | 75T |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Strengthens the link between tire and rim for a more precise driving experience. |

# W 651 Snow Master

The ideal winter tire for passenger cars. This tire maximizes your vehicle performance on snowy and icy surfaces. Provides confident stopping power and reliable handling during driving.



## ULTIMATE GRIP AND BRAKE PERFORMANCE IN HARSH WINTER CONDITIONS

### PATTERN PROPERTIES



- Wide tread blocks enable confident stopping performance on snowy and icy surfaces.



- Z-shaped sipes ensures handling performance.



- V Shaped tread design on the inner side minimizes noise level and enables comfortable driving.



- High maneuverability capacity thanks to its outer block design.



M+S WINTER






## ALL SIZES

## W 651 Snow Master

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 185/65R 15 | 88H | 205/60R 15 | 91H | 205/55R 16 **RFT** | 91H | 205/50R 16 RF | 91H | 235/45R 17 RF | 97V |
| 185/65R 15 RF | 92H | 205/60R 16 | 92H | 205/55R 17 | 91H | 225/50R 16 RF | 96V | 235/45R 18 RF | 98V |
| 195/65R 15 | 91H | 215/60R 16 | 95H | 215/55R 16 | 93H | 205/50R 17 RF | 93V | 245/45R 17 RF | 99V |
| 195/65R 15 RF | 95H | 225/60R 16 | 98H | 225/55R 16 | 95H | 215/50R 17 | 91H | 245/45R 18 RF | 100V |
| 205/65R 15 | 94H | 235/60R 16 | 100H | 215/55R 17 RF | 98V | 215/50R 18 | 92V | 245/45R 19 RF | 102V |
| 215/65R 15 | 96H | 185/55R 14 | 80H | 225/55R 17 | 97H | 225/50R 17 RF | 98V | 225/40R 18 RF | 92V |
| 205/65R 16 | 95H | 185/55R 15 | 82H | 225/55R 17 RF | 101V | 235/50R 19 RF | 103V | 235/40R 18 RF | 95V |
| 215/65R 16 | 98H | 185/55R 16 RF | 87H | 225/55RF 17 **RFT** | 97V | 245/50R 18 RF | 104V | 245/40R 17 RF | 95V |
| 215/65R 16 RF | 102T | 195/55R 15 | 85H | 235/55R 17 RF | 103V | 195/45R 16 RF | 84H | 245/40R 18 RF | 97V |
| 185/60R 14 | 82H | 195/55R 16 | 87H | 195/50R 15 | 82H | 205/45R 16 RF | 87H | 245/40R 19 RF | 98V |
| 195/60R 14 | 86H | 205/55R 15 | 88V | 205/50R 15 | 86H | 205/45R 17 RF | 88H | 255/40R 19 RF | 100V |
| 185/60R 15 | 84H | 205/55R 15 RF | 92V | 195/50R 16 | 84H | 215/45R 17 RF | 91V | 245/50R 18 **RFT*** | |
| 195/60R 15 | 88H | 205/55R 16 | 91H | 205/50R 16 | 87H | 215/45R 16 RF | 90V | 225/45R 18 **RFT*** | |
| | | | | | | 215/45R 18 RF | 93V | 245/45R 18 **RFT*** | |
| | | | | | | 225/45R 17 RF | 94V | 245/45R 19 **RFT*** | |
| | | | | | | 225/45R 18 RF | 95V | 225/40R 18 **RFT*** | |
| | | | | | | | | 245/40R 19 **RFT*** | |

RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 555 Multi Action

It is an all season tire  for using in wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire ensure better grip and braking on snowy roads.




## EXCEPTIONAL ALL-SEASON PERFORMANCE

### PATTERN PROPERTIES



Block design enables comfort driving and durability.



Sipes improve handling performance and offers better grip and braking performace.



V – shaped tread design on the inner side minimises noise and improves comfort.



M+S WINTER SUMMER





## UNDER DEVELOPMENT SIZES

PT 555 Multi Action

| | | |
|---|---|---|
| 175/65R 14 | 195/55R 15 | 225/45R 17 |
| 185/65R 14 | 195/55R 16 | 225/45R 18 |
| 185/65R 15 | 205/55R 16 | 235/45R 17 |
| 195/65R 15 | 215/55R 16 | 235/45R 18 |
| 205/65R 15 | 225/55R 16 | 245/45R 18 |
| 185/60R 15 | 225/55R 17 | 225/40R 18 |
| 195/60R 15 | 205/50R 17 | |
| 205/60R 16 | 215/50R 17 | |
| 185/55R 15 | 225/50R 17 | |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |




PT 411

SUMMER WINTER



PT 421

SUMMER WINTER



PT 431

SUMMER



W 671

WINTER






# Best Quality Suv, 4x4 Tires

# PT 411 Explero A/S

High performance 4x4 SUV tire offers reliable performance through the year. With its special compound mixture shows great traction performance on any kind of surface. Offers superb comfort and very low levels of noise and vibration.




## OUTSTANDING DRIVING PERFORMANCE IN ALL WEATHER CONDITIONS

### PATTERN PROPERTIES



Special outside block design improves cornering performance and enables four season use.



Excellent and effective water discharge by four grooves on the tread.



Thanks to its special compound mixture reduces noise levels and offers comfort during driving.



Wide contact area distributes the pressure all over the tire and provides outstanding traction.



M+S SUMMER WINTER





## ALL SIZES

PT 411 Explero A/S

| | | | |
|---|---|---|---|
| 235/75R 15 A/S | 105H | 215/65R 17 A/S | 99H |
| 205/70R 15 A/S | 96H | 225/65R 17 A/S | 102H |
| 215/70R 15 A/S | 98H | 235/65R 17 A/S RF | 108H |
| 215/70R 16 A/S | 100H | 245/65R 17 A/S RF | 111H |
| 225/70R 16 A/S RF | 107T | 255/65R 16 A/S | 109H |
| 235/70R 16 A/S | 106H | 255/65R 17 A/S | 110H |
| 245/70R 16 A/S | 107H | 265/65R 17 A/S | 112H |
| 255/70R 16 A/S | 111T | 215/60R 16 A/S | 95H |
| 265/70R 16 A/S | 112T | 225/60R 17 A/S RF | 103H |
| 215/65R 16 A/S | 98H | 235/60R 16 A/S | 100H |
| 215/65R 16 A/S RF | 102H | | |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 421 Explero A/T

Produced to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire thanks to its special compound. Special tread design improves braking performance and reduces irregular wear.




## ALL TERRAIN PATTERN WITH UNIQUE TRACTION CAPABILITY

### PATTERN PROPERTIES



- Circular center block improves straight line performance.



- Tread design guarantees exceptional grip and handling.
  High grip on wet surface.



- Comfortable, quiet ride on the road thanks to its special compound.



- Outer and inner shoulder designs prevent the vehicle sinking into the mud.



M+S SUMMER WINTER





## ALL SIZES

PT 421 Explero A/T

| | | |
|---|---|---|
| 205/80R | 16 A/T RF | 104T |
| 215/80R | 15 A/T | 102S |
| 235/75R | 15 A/T | 105T |
| 235/70R | 16 A/T | 106T |
| 255/70R | 15 A/T | 108T |
| 265/70R | 15 A/T RF | 116T |
| 245/70R | 16 A/T RF | 111T |
| 215/65R | 16 A/T | 98T |
| 265/65R | 17 A/T RF | 116S |
| 265/60R | 18 A/T RF | 114T |

RF: REINFORCED



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 431 Explero H/T

Summer tire developed for luxury SUVs. It combines quality and high performance with its specially developed tread design and compound. Block array maximizes grip performance in every driving situation. Offers short braking distance on wet surfaces.




## DESIGNED FOR ULTIMATE DRIVING COMFORT

### PATTERN PROPERTIES



Center block improves straight line performance.



High performance on any kind of surface thanks to its asymmetrical pattern design.



Reinforced shoulder block increases the surface amount provides and offers high cornering performance.



Outer side designed more intense, provides better grip on dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



Three grooves enable effective water discharge.



SUMMER







●●

## ALL SIZES

## PT 431 Explero H/T

| | | | |
|---|---|---|---|
| 235/65R 17 H/T RF 108V | 265/60R 18 H/T 110H ●● | 235/55R 19 H/T RF 105V | 265/50ZR 19 H/T RF 110W ●● |
| 215/60R 17 H/T 96V | 265/60R 18 H/T 110V ●● | 245/55R 19 H/T 103H | 275/45ZR 19 H/T RF 108W ●● |
| 225/60R 18 H/T 100H | 215/55R 18 H/T 95H | 255/55R 18 H/T RF 109V ●● | 275/45ZR 20 H/T RF 110W ●● |
| 235/60R 17 H/T 102V | 225/55R 19 H/T 99H | 255/55R 19 H/T RF 111V ●● | 285/45R 19 H/T 107V ●● |
| 235/60R 18 H/T RF 107V | 225/55R 18 H/T 98V | 275/55R 19 H/T 111V ●● | 275/40ZR 20 H/T 102W ●● |
| 245/60R 18 H/T 105H | 225/55R 17 H/T 97V | 235/50R 18 H/T RF 101V | 315/35ZR 20 RF* |
| 255/60R 17 H/T 106V ●● | 235/55R 17 H/T RF 103V | 255/50R 19 H/T RF 107V ●● | 315/35ZR 20 RF **RFT*** |
| 255/60R 18 H/T RF 112V ●● | 235/55R 18 H/T 100V | 255/50ZR 19 H/T RF **RFT** 107W ●● | |

RF:REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# W 671 Explero

Designed for high traction and grip performance on snowy and icy surfaces. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. reduces stopping distance on slippery surfaces.



## CONFIDENT TRACTION AND BRAKE PERFORMANCE ON SEVERE WINTER CONDITIONS

### PATTERN PROPERTIES



High performance on icy and wet surfaces with Z –shaped sipes.



Stability on stream driving routes with circumferential block on the center.



Low noise and high driving comfort with V-shaped grooves.



Fast and effective water/snow discharge with three circular canals



High maneuverability and turning performance with reinforced block type.







## ALL SIZES

## W 671 Explero

| | |
|---|---|
| 205/80R 16 RF | 104T |
| 215/80R 15 | 102S |
| 235/75R 15 RF | 109T |
| 205/70R 15 | 96T |
| 215/70R 15 | 98H |
| 215/70R 16 RF | 104H |
| 225/70R 16 RF | 107H |
| 235/70R 16 | 106T |
| 245/70R 16 RF | 111T |
| 255/70R 16 | 111T |
| 265/70R 16 | 112T |
| 215/65R 17 | 99H |
| 225/65R 17 RF | 106H |
| 235/65R 17 RF | 108V |
| 245/65R 17 RF | 111H |
| 255/65R 17 RF | 114H |
| 265/65R 17 RF | 116H |
| 215/60R 17 RF | 100H |
| 225/60R 17 RF | 103V |
| 235/60R 17 RF | 106H |
| 255/60R 17 RF | 110V |
| 225/60R 18 RF | 104V |
| 235/60R 18 RF | 107H |
| 245/60R 18 RF | 105H |
| 255/60R 18 RF | 112H |
| 235/55R 17 RF | 103V |
| 265/60R 18 RF | 114H |
| 205/55R 19 RF | 97H |
| 215/55R 18 | 95H |
| 225/55R 18 RF | 102H |
| 235/55R 18 RF | 104H |
| 255/55R 18 RF | 109V |
| 225/55R 19 | 99H |
| 235/55R 19 RF | 105V |
| 245/55R 19 | 103H |
| 255/55R 19 RF | 111V |
| 275/55R 19 | 111H •• |
| 235/50R 18 RF | 101V |
| 235/50R 19 RF | 103V |
| 255/50R 19 RF | 107V |
| 255/50R 19 RF **RFT** | 107V |
| 265/50R 20 RF | 111H |
| 245/50R 20 | 102V |
| 225/45R 19 RF | 96V |
| 275/45R 20 RF | 110V •• |
| 285/45R 19 RF | 111H •• |
| 275/40R 20 RF | 106V •• |
| 315/35R 20 RF | 110V •• |
| 255/55R 18 **RFT*** | |
| 275/40R 20 **RFT*** | |
| 275/40R 20 **RFT*** | |
| 315/35R 20* | |
| 315/35R 20 **RFT*** | |

RF:REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |




## PT 825

SUMMER



## PT 825 plus

SUMMER



## PT 835

SUMMER





# LIGHT TRUCK TIRES

## PT 875

SUMMER WINTER



## PT 925

WINTER



## PT 935

WINTER



## PT 945

UNDER DEVELOPMENT

WINTER



# PT 825 Full Power

Designed for commercial light trucks, transporters and vans. Deep treads and straight ribs provide excellent handling in any kind of weather condition. Offer durability thanks to its special compound resistant to wear and cornering safety.




## DESIGNED TO DELIVER OPTIMAL PERFORMANCE AND DURABILITY

### PATTERN PROPERTIES



High performance on icy and wet surfaces with Z –shaped sipes.



Circumferential tiny groove on shoulder block provides even wear.



Computer simulated pitch frequency minimizes road / pattern noise and improves comfort for quite ride.



Circumferential 3-wide grooves provide excellent water drainage and improve aquaplaning significantly.



SUMMER





## ALL SIZES

PT 825 Full Power

| | | |
|---|---|---|
| 195R 14 C | 8PR | 106/104R |
| 195R 15 C | 8PR | 106/104R |
| 225/70R 15 C | 8PR | 112/110R |
| 225/70R 15 C | 10PR | 116/114R |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 825 Full Power Plus

Radial summer tire designed with high technology. Offers high-grip performance and wear resistance thanks to its special tread compound.




## OUTSTANDING GRIP PERFORMANCE IN WET AND DRY CONDITIONS

### PATTERN PROPERTIES



Better grip and traction on wet or dry surfaces with Z shape tread design.



Special formulized tread composition provides ultimate grip on asphalt.



Computer designed block array minimizes road/pattern noise, high driving comfort.



Circumferential 3 channel provide excellent water discharge.





SUMMER






## ALL SIZES

### PT 825 Full Power Plus

| | | |
|---|---|---|
| 5.00R 12 C | 8PR | 83/81P |
| 155R 12 C | 8PR | 88/86N |
| 155R 13 C | 6PR | 85/83N |
| 185R 14 C | 8PR | 102/100R |
| 195R 14 C | 8PR | 106/104R |
| 185R 15 C | 8PR | 103/102R |
| 175/75R 16 C | 8PR | 101/99R |
| 185/75R 16 C | 8PR | 104/102R |
| 195/75R 16 C | 8PR | 107/105R |
| 205/75R 16 C | 8PR | 110/108R |
| 205/75R 16 C | 10PR | 113/111R |
| 215/75R 16 C | 8PR | 113/111R |
| 215/75R 16 C | 10PR | 116/114R |
| 225/75R 16 C | 8PR | 118/116R |
| 165/70R 14 C | 6PR | 89/87R |
| 195/70R 15 C | 8PR | 104/102R |
| 205/70R 15 C | 8PR | 106/104R |
| 215/70R 15 C | 8PR | 109/107S |
| 225/70R 15 C | 8PR | 112/110R |
| 225/70R 15 C | 10PR | 116/114R |
| 205/65R 15 C | 8PR | 102/100T |
| 205/65R 16 C | 8PR | 107/105T |
| 215/65R 16 C | 8PR | 109/107R |
| 225/65R 16 C | 8PR | 112/110R |
| 235/65R 16 C | 8PR | 115/113R |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 835 Full Power

Safe handling in all kind of situations, even under heavy loads. Wide contact area increased stability and increase driving performance. Offer excellent mileage, rolling resistance and safety in wet surfaces.



## LONG LASTING PERFORMANCE, WITH ULTIMATE WET GRIP AND HANDLING CAPABILITY

### PATTERN PROPERTIES



Better grip performance on both and dry surfaces thanks to its special tread design.



Center groove improves riding comfort.



Computer designed block array minimizes road and pattern noise.



Three groves provide excellent water discharge.



Reinforced carcass and bead improves durability.





SUMMER





## ALL SIZES

PT 835 Full Power

| | | |
|---|---|---|
| 205/75R 16 C | 8PR | 110/108R |
| 215/75R 16 C | 8PR | 113/111R |
| 215/75R 16 C | 10PR | 116/114R |
| 225/70R 15 C | 8PR | 112/110R |
| 195/65R 16 C | 8PR | 104/102T |
| 205/65R 16 C | 8PR | 107/105T |
| 215/65R 15 C | 6PR | 104/102T |
| 215/65R 16 C | 8PR | 109/107R |
| 235/65R 16 C | 8PR | 115/113R |
| 235/65R 16 C | 12PR | 121/119R |
| 285/65R 16 C | 10PR | 128N ●● |
| 195/60R 16 C | 6PR | 99/97T |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

# PT 875 Advente

Interlocking tread blocks offers durability. Perform high performance on dry surfaces. High wear resistance against wear with special shoulder structure. Multi-angle sipes offer all-season traction every kind of road.



## MAXIMUM PERFORMANCE IN DIFFERENT WEATHER CONDITIONS

### PATTERN PROPERTIES



Its a special four season tire, provides high handling performance and short brake distance on icy, wet and dry surfaces.



Thanks to its special tread mixture show outstanding grip performance on icy surfaces.



Block array minimizes road noise and offers comfort driving.



Effective discharge of water by three grooves tread pattern.



Special shoulder structure provides high resistance to wear.





M+S SUMMER WINTER






## ALL SIZES

PT 875 Advente

| | | |
|---|---|---|
| 155R 12 C | 8PR | 88/86N |
| 155R 13 C | 8PR | 90/89R |
| 185R 14 C | 8PR | 102/100R |
| 195R 14 C | 8PR | 106/104R |
| 185/75R 16 C | 8PR | 104/102R |
| 195/75R 16 C | 8PR | 107/105R |
| 205/75R 16 C | 8PR | 110/108R |
| 215/75R 16 C | 8PR | 113/111R |
| 225/75R 16 C | 8PR | 118/116R |

| | | |
|---|---|---|
| 195/70R 15 C | 8PR | 104/102R |
| 205/70R 15 C | 8PR | 106/104R |
| 215/70R 15 C | 8PR | 109/107R |
| 225/70R 15 C | 8PR | 112/110R |
| 205/65R 15 C | 8PR | 102/100T |
| 205/65R 16 C | 8PR | 107/105T |
| 215/65R 16 C | 8PR | 109/107R |
| 225/65R 16 C | 8PR | 112/110R |
| 235/65R 16 C | 8PR | 115/113R |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 925 Full Grip

Designed to overcome winter challenges. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.



## EXCELLENT GRIP CAPABILITY WITH LONG LASTING PERFORMANCE

### PATTERN PROPERTIES



Optimized shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



Multi sipes improve handling and braking performance on snow and ice.



Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



Stiff shoulder blocks improve cornering and maneuverability at high speeds and ensure even wear on shoulder.



Sharp edges on shoulder improve cornering.



Wide circumferential grooves provide exceptional water drainage ant boost aquaplaning performance.








## ALL SIZES

PT 925 Full Grip

| | | |
|---|---|---|
| 155R 12 C | 8PR | 88/86N |
| 155R 13 C | 6PR | 85/83N |
| 185R 14 C | 8PR | 102/100R |
| 195R 14 C | 8PR | 106/104R |
| 175/75R 16 C | 8PR | 101/99R |
| 185/75R 16 C | 8PR | 104/102R |
| 195/75R 16 C | 8PR | 107/105R |
| 205/75R 16 C | 8PR | 110/108R |
| 215/75R 16 C | 8PR | 113/111R |
| 225/75R 16 C | 8PR | 118/116R |

| | | |
|---|---|---|
| 195/70R 15 C | 8PR | 104/102R |
| 205/70R 15 C | 8PR | 106/104R |
| 215/70R 15 C | 8PR | 109/107R |
| 225/70R 15 C | 8PR | 112/110R |
| 205/65R 15 C | 8PR | 102/100T |
| 205/65R 16 C | 8PR | 107/105T |
| 215/65R 16 C | 8PR | 109/107R |
| 225/65R 16 C | 8PR | 112/110R |
| 235/65R 16 C | 8PR | 115/113R |
| 195/60R 16 C | 6PR | 99/97T |



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| FST | Fine Silica Technology | Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice. |
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 935 Full Grip

Unique tread design with wavy sipes enables high grip performance on icy surfaces. Offers safety and durability.



## EXCEPTIONAL TRACTION AND BRAKE PERFORMANCE IN HARSH WINTER CONDITIONS

### PATTERN PROPERTIES



Optimized shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



Multi sipes improve handling and braking performance on snow and ice.



Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quite ride.



Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



Wide circumferential and lateral grooves provide exceptional water drainage ant boost aquaplaning performance.





M+S WINTER








●●

## ALL SIZES

PT 935 Full Grip

| | | |
|---|---|---|
| 155R 12 C | 8PR | 88/86N |
| 155R 13 C | 6PR | 85/83N |
| 185R 14 C | 8PR | 102/100R |
| 195R 14 C | 8PR | 106/104R |
| 185/75R 16 C | 8PR | 104/102R |
| 195/75R 16 C | 8PR | 107/105R |
| 205/75R 16 C | 10PR | 113/111R |
| 215/75R 16 C | 10PR | 116/114R |
| 225/75R 16 C | 8PR | 118/116R |
| 195/70R 15 C | 8PR | 104/102R |
| 205/70R 15 C | 8PR | 106/104R |
| 225/70R 15 C | 8PR | 112/110R |
| 215/65R 15 C | 6PR | 104/102T |
| 195/65R 16 C | 8PR | 104/102T |
| 205/65R 16 C | 8PR | 107/105T |
| 215/65R 16 C | 8PR | 109/107R |
| 225/65R 16 C | 8PR | 112/110R |
| 235/65R 16 C | 10PR | 121/119R |
| 285/65R 16 C | 10PR | 128 N ●● |
| 195/60R 16 C | 6PR | 99/97T |







## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and lowerR ate of tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

petlas

# PT 945 Full Grip

Unique pattern design with multidirectional wavy sipes and tread compound delivers exceptional performance in winter conditions and on the wet roads. 3PMSF and M+S markings on that tire ensure better grip and braking on snowy roads. Three circumferential grooves offer effective discharge of water and reduce aquaplaning.




## DESIGNED FOR ULTIMATE PERFORMACE IN MILD-WINTER CONDITIONS

### PATTERN PROPERTIES



Optimised shoulder width increases foot print pressure resulting in higher traction and grip on snow and ice.



Multi sipes and block type tread pattern improve grip and breaking performance on snow and ice.



Computer simulated pitch frequency minimizes road/pattern noise improving comfort for quieter ride.



Stiff shoulder blocks improve cornering and maneuvers even at high speeds and ensure even wear on shoulders.



Wide grooves provide exceptional water drainage and boost aquaplanning performance.









## PT 945 Full Grip

## UNDER DEVELOPMENT SIZES

215/75R 16 C
235/65R 16 C



## TECHNOLOGY & BENEFITS

| | | |
|---|---|---|
| High Tech Undertread Construction | Jointless "0" degree spiral nylon cover and wide steel belts | It improves uniformity for smoother ride, durability and lowerR ate of tread wear. |
| Jointless Mono Strand Bead Wire and Hard Bead Filler | Strengthens the link between tire and rim for a more precise driving experience. | Improve lateral stability in high speed cornering and uniformity for smoother ride. |

# PT 311 ELEGANT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 155/80R 12 | 77 | T | 412 | 190 | 35 |
| 145/70R 12 | 69 | T | 325 | 190 | 36 |
| 155/70R 12 | 73 | T | 365 | 190 | 36 |
| 165/70R 12 | 77 | T | 412 | 190 | 36 |
| 175/70R 12 | 80 | T | 450 | 190 | 36 |
| 155/80R 13 | 79 | T | 437 | 190 | 35 |
| 165/80R 13 | 83 | T | 487 | 190 | 35 |
| 165/80R 13 RF | 87 | R | 545 | 170 | 41 |
| 145/70R 13 | 71 | T | 345 | 190 | 36 |
| 155/70R 13 | 75 | T | 387 | 190 | 36 |
| 165/70R 13 | 79 | T | 437 | 190 | 36 |
| 165/70R 13 RF | 83 | T | 487 | 190 | 42 |
| 175/70R 13 | 82 | T | 475 | 190 | 36 |
| 185/70R 13 | 86 | T | 530 | 190 | 36 |
| 155/65R 13 | 73 | T | 365 | 190 | 36 |
| 165/65R 13 | 77 | T | 412 | 190 | 36 |
| 175/65R 13 | 80 | T | 450 | 190 | 36 |
| 175/80R 14 | 88 | T | 560 | 190 | 35 |
| 165/70R 14 | 81 | T | 462 | 190 | 36 |
| 165/70R 14 RF | 85 | R | 515 | 170 | 42 |
| 175/70R 14 | 84 | T | 500 | 190 | 36 |
| 175/70R 14 RF | 88 | T | 560 | 190 | 42 |
| 185/70R 14 | 88 | T | 560 | 190 | 36 |
| 195/70R 14 | 91 | T | 615 | 190 | 36 |
| 155/65R 14 | 75 | T | 387 | 190 | 36 |
| 165/65R 14 | 79 | T | 437 | 190 | 36 |
| 175/65R 14 | 82 | T | 475 | 190 | 36 |
| 175/65R 14 | 86 | T | 530 | 190 | 42 |
| 185/65R 14 | 86 | T | 530 | 190 | 36 |
| 195/65R 14 | 89 | H | 580 | 210 | 36 |
| 165/60R 14 | 75 | T | 387 | 190 | 36 |
| 165/80R 15 | 87 | T | 545 | 190 | 35 |
| 195/70R 15 RF | 97 | T | 730 | 190 | 42 |
| 175/65R 15 | 84 | T | 500 | 190 | 36 |
| 185/65R 15 | 88 | T | 560 | 190 | 36 |
| 195/65R 15 RF | 95 | T | 690 | 190 | 42 |
| 195/65R 15 | 91 | T | 615 | 190 | 36 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Our company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 4,50B | 4,00B, 5,00B | 156 | 554 | F | C | 69 | 2 |
| 4,50B | 3,50B, 4,00B, 5,00B | 145 | 512 | F | C | 69 | 2 |
| 4,50B | 4,00B, 5,00B | 156 | 526 | F | C | 69 | 2 |
| 5,00B | 4,00B, 4,50B, 5,50B | 169 | 539 | F | C | 69 | 2 |
| 5,00B | 4,50B, 5,50B, 6,00B | 177 | 555 | E | C | 69 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J | 156 | 580 | F | C | 69 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J,5,50B, 5½J | 166 | 595 | E | C | 69 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J,5,50B, 5½J | 166 | 595 | E | C | 69 | 2 |
| 4,50B, 4½J | 3,50B, 3½J, 4,00B, 4J, 5,00B, 5J | 146 | 539 | F | C | 69 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J | 155 | 554 | F | C | 69 | 2 |
| 5,00B, 5J | 4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J | 168 | 565 | F | C | 69 | 2 |
| 5,00B, 5J | 4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J | 168 | 565 | E | C | 69 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 177 | 582 | E | C | 69 | 2 |
| 5,50B, 5½J | 4,50B, 4½J, 5,00B, 5J, 6,00B, 6J | 189 | 592 | E | C | 69 | 2 |
| 4,50B, 4½J | 5,00B, 5J, 5,50B, 5½J | 154 | 534 | F | C | 69 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 170 | 550 | F | C | 69 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6,00B, 6J | 175 | 560 | E | C | 69 | 2 |
| 5J | 4½J, 5½J, 6J | 177 | 637 | E | C | 69 | 2 |
| 5,00B, 5J | 4J, 4,50B, 4½J, 5,50B, 5½J | 168 | 590 | E | C | 69 | 2 |
| 5,00B, 5J | 4J, 4,50B, 4½J, 5,50B, 5½J | 168 | 590 | E | C | 69 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 177 | 605 | E | C | 69 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 177 | 605 | E | C | 69 | 2 |
| 5½J | 4½J, 5J, 6J | 193 | 618 | E | C | 69 | 2 |
| 6J | 5J, 5½J, 6½J | 201 | 630 | E | C | 69 | 2 |
| 4,50B, 4½J | 5,00B, 5J, 5,50B, 5½J | 155 | 561 | F | C | 69 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6J | 170 | 577 | E | C | 69 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 174 | 586 | E | C | 69 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 174 | 586 | E | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 602 | E | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 613 | E | C | 69 | 2 |
| 5,00B, 5J | 4½J, 5½J, 6J | 169 | 558 | F | C | 69 | 2 |
| 4½J | 4J, 5J, 5½J | 165 | 646 | E | C | 69 | 2 |
| 6J | 5J, 5½J, 6½J | 203 | 658 | C | C | 69 | 2 |
| 5J | 5½J, 6J | 175 | 610 | E | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 627 | E | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 641 | E | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 641 | E | C | 69 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Our company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

# PT 515 IMPERIUM

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 175/60R 13 | 77 | H | 412 | 210 | 36 |
| 175/70R 13 | 82 | T | 475 | 190 | 36 |
| 175/70R 13 | 82 | H | 475 | 210 | 36 |
| 185/70R 14 | 88 | H | 560 | 210 | 36 |
| 175/70R 14 | 84 | H | 500 | 210 | 36 |
| 175/70R 14 RF | 88 | H | 560 | 210 | 42 |
| 175/65R 14 | 82 | H | 475 | 210 | 36 |
| 175/65R 14 RF | 86 | T | 530 | 190 | 42 |
| 185/65R 14 | 86 | H | 530 | 210 | 36 |
| 185/60R 14 | 82 | H | 475 | 210 | 36 |
| 195/60R 14 | 86 | H | 530 | 210 | 36 |
| 185/60R 14 | 82 | H | 475 | 210 | 36 |
| 195/60R 14 | 86 | H | 530 | 210 | 36 |
| 175/65R 15 | 84 | H | 500 | 210 | 36 |
| 185/65R 15 | 88 | H | 560 | 210 | 36 |
| 185/65R 15 RF | 92 | H | 630 | 210 | 42 |
| 195/65R 15 | 91 | H | 615 | 210 | 36 |
| 195/65R 15 | 91 | V | 615 | 240 | 36 |
| 195/65R 15 RF | 95 | H | 690 | 210 | 42 |
| 205/65R 15 | 94 | H | 670 | 210 | 36 |
| 205/65R 15 | 94 | V | 670 | 240 | 36 |
| 205/65R 15 RF | 99 | H | 775 | 210 | 42 |
| 215/65R 15 | 96 | V | 710 | 240 | 36 |
| 185/60R 15 | 84 | H | 500 | 210 | 36 |
| 185/60R 15 RF | 88 | H | 560 | 210 | 42 |
| 195/60R 15 | 88 | H | 560 | 210 | 36 |
| 195/60R 15 | 88 | V | 560 | 240 | 36 |
| 205/60R 15 | 91 | H | 615 | 210 | 36 |
| 205/60R 15 | 91 | V | 615 | 240 | 36 |
| 185/55R 15 | 82 | V | 475 | 240 | 36 |
| 195/55R 15 | 85 | V | 515 | 240 | 36 |
| 205/55R 15 | 88 | V | 560 | 240 | 36 |
| 195/50R 15* | 82 | V | 475 | 240 | 36 |
| 205/50R 15* | 86 | W | 530 | 270 | 36 |
| 205/65R 16 | 95 | H | 690 | 210 | 36 |
| 215/65R 16 | 98 | H | 750 | 210 | 36 |
| 215/65R 16 | 98 | V | 750 | 240 | 36 |
| 205/60R 16 | 92 | H | 630 | 210 | 36 |
| 205/60R 16 | 92 | V | 630 | 240 | 36 |
| 195/55R 16 | 87 | V | 545 | 240 | 36 |
| 205/55R 16 | 91 | H | 615 | 210 | 36 |
| 205/55R 16 | 91 | V | 615 | 240 | 36 |
| 215/55R 16 | 93 | H | 650 | 210 | 36 |
| 215/55R 16 | 93 | V | 650 | 240 | 36 |
| 225/55ZR 16 | 95 | W | 690 | 270 | 36 |
| 205/50ZR 16* | 87 | W | 545 | 270 | 36 |
| 225/55ZR 17* | 97 | W | 730 | 270 | 36 |
| 205/50ZR 17 RF* | 93 | W | 650 | 270 | 42 |
| 225/50ZR 17 RF* | 98 | W | 750 | 270 | 42 |
| 215/45ZR 17 RF* | 91 | W | 615 | 270 | 42 |
| 225/45ZR 17 RF* | 94 | W | 670 | 270 | 42 |

*Sizes with rim guard

Description
*For load capacity on various speeds, and inflation figures, please consult your sales representative.
*Load capacity on standard speed and weight.
*Our company is entitled to make any change on any information in this catalogue, without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 5J | 5.00B, 5.50B, 5½J, 6.00B, 6J | 174 | 541,5 | E | B | 70 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 179 | 578 | E | B | 70 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 179 | 578 | E | B | 70 | 2 |
| 5½J | 4½J, 5J, 6J | 189 | 616 | E | B | 70 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 178 | 605 | E | B | 70 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 178 | 605 | E | B | 70 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 177 | 589 | E | B | 70 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 177 | 589 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 600 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 582 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 593 | E | B | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 582 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 593 | E | B | 71 | 2 |
| 5J | 5½J, 6J | 177 | 615 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 625 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 625 | C | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 638 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 638 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 638 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 210 | 650 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 210 | 650 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 210 | 650 | C | B | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 662 | C | B | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 609 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 609 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 198 | 622 | E | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 198 | 622 | E | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 209 | 630 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 209 | 630 | C | B | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 192 | 592 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 197 | 598 | E | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 216 | 609 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 195 | 581 | E | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 211 | 589 | E | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 209 | 675 | C | B | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 223 | 688 | C | B | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 223 | 688 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 210 | 655 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 210 | 655 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 199 | 625 | E | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 636 | C | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 636 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 642 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 642 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 230 | 660 | C | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 617 | E | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 226 | 690 | C | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 638 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 223 | 666 | C | B | 71 | 2 |
| 7J | 7½J, 8J | 206 | 632 | C | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 225 | 642 | C | B | 71 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Our company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

# PT 525 PROGREEN

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 175/70R 14 | 84 | T | 500 | 190 | 36 |
| 175/70R 14 RF | 88 | T | 560 | 190 | 42 |
| 185/70R 14 | 88 | T | 560 | 190 | 36 |
| 175/65R 14 | 82 | T | 475 | 190 | 36 |
| 175/65R 14 RF | 86 | T | 530 | 190 | 42 |
| 185/65R 14 | 86 | T | 530 | 190 | 36 |
| 185/60R 14 | 82 | H | 475 | 210 | 36 |
| 185/55R 14* | 80 | H | 450 | 210 | 36 |
| 185/65R 15 | 88 | T | 560 | 190 | 36 |
| 185/65R 15 | 88 | H | 560 | 210 | 36 |
| 185/65R 15 RF | 92 | H | 630 | 210 | 42 |
| 195/65R 15 | 91 | T | 615 | 190 | 36 |
| 195/65R 15 | 91 | H | 615 | 210 | 36 |
| 195/65R 15 | 91 | V | 615 | 240 | 36 |
| 195/65R 15 RF | 95 | T | 690 | 190 | 42 |
| 205/65R 15 | 94 | H | 670 | 210 | 36 |
| 185/60R 15 | 84 | H | 500 | 210 | 36 |
| 185/60R 15 RF | 88 | H | 560 | 210 | 42 |
| 195/60R 15 | 88 | H | 560 | 210 | 36 |
| 185/55R 15* | 82 | V | 475 | 240 | 36 |
| 195/55R 15* | 85 | H | 515 | 210 | 36 |
| 195/50R 15* | 82 | H | 475 | 210 | 36 |
| 205/60R 16 | 92 | H | 630 | 210 | 36 |
| 205/60R 16 | 92 | V | 630 | 240 | 36 |
| 215/60R 16 | 95 | V | 690 | 240 | 36 |
| 195/55R 16* | 87 | H | 545 | 210 | 36 |
| 205/55R 16* | 91 | H | 615 | 210 | 36 |
| 195/50R 16 RF* | 88 | V | 560 | 240 | 42 |

*Sizes with rim guard

# PT 535 IMPERIUM

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 175/70R 14* | 84 | H | 500 | 210 | 36 |
| 175/65R 14 | 82 | H | 475 | 210 | 36 |
| 185/65R 14 | 86 | H | 530 | 210 | 36 |
| 195/65R 15 RF | 95 | H | 690 | 210 | 42 |
| 185/65R 15 | 88 | H | 560 | 210 | 36 |
| 185/65R 15 RF | 92 | H | 630 | 210 | 42 |
| 195/65R 15* | 91 | H | 615 | 210 | 36 |
| 185/60R 15* | 84 | H | 500 | 210 | 36 |
| 185/60R 15 RF | 88 | H | 560 | 210 | 42 |
| 195/60R 15* | 88 | H | 560 | 210 | 36 |
| 195/55R 16* | 87 | H | 545 | 210 | 36 |
| 205/55R 16* | 91 | H | 615 | 210 | 36 |
| 195/50R 16* | 84 | H | 500 | 210 | 36 |

*Size with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 178 | 599,5 | C | C | 69 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 178 | 599,5 | C | C | 69 | 2 |
| 5½J | 4½J, 5J, 6J | 192 | 613 | C | C | 69 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 179 | 582 | C | C | 69 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 179 | 582 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 596 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 186 | 574 | C | C | 69 | 2 |
| 6J | 5J, 5½J, 6½J | 193 | 556 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 620 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 620 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 620 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 206 | 633 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 206 | 633 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 206 | 633 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 206 | 633 | C | C | 70 | 2 |
| 6J | 5½J, 6½J, 7J, 7½ J | 206 | 646 | C | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 184 | 603,5 | C | C | 69 | 2 |
| 5½J | 5J, 6J, 6½J | 184 | 603,5 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 615 | C | B | 69 | 2 |
| 6J | 5J, 5½J, 6½J | 193 | 582 | C | C | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 593 | C | B | 69 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 573 | C | B | 69 | 2 |
| 6J | 5½J, 6½J, 7J, 7½ J | 204 | 650 | C | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J, 7½ J | 204 | 650 | C | B | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 663 | C | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 618 | C | B | 69 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 632 | C | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 598 | C | B | 69 | 2 |



| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 177 | 602 | E | B | 70 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 177 | 584 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 193 | 596 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 635 | E | B | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 623 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 623 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 635 | E | B | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 603 | E | B | 70 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 603 | E | B | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 613 | E | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 197 | 621 | E | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 632 | E | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 198 | 602 | E | B | 71 | 2 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

petlas

# PT 711 VELOX SPORT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 185/60R 13* | 80 | H | 450 | 210 | 36 |
| 185/60R 13* | 80 | V | 450 | 240 | 36 |
| 185/55R 14* | 80 | H | 450 | 210 | 36 |
| 185/55R 14* | 80 | V | 450 | 240 | 36 |
| 195/45R 14* | 77 | V | 412 | 240 | 36 |
| 185/55R 15* | 82 | H | 475 | 210 | 36 |
| 185/55R 15* | 82 | V | 475 | 240 | 36 |
| 195/55R 15* | 85 | V | 515 | 240 | 36 |
| 205/55R 15* | 88 | V | 560 | 240 | 36 |
| 195/50R 15* | 82 | V | 475 | 240 | 36 |
| 205/50ZR 15* | 86 | W | 530 | 270 | 36 |
| 195/45R 15* | 78 | V | 425 | 240 | 36 |
| 205/45R 15* | 81 | V | 462 | 240 | 36 |
| 195/55R 16* | 87 | V | 545 | 240 | 36 |
| 205/55R 16* | 91 | V | 615 | 240 | 36 |
| 205/55ZR 16 RF* | 94 | W | 670 | 270 | 42 |
| 215/55ZR 16 RF* | 97 | W | 730 | 270 | 42 |
| 225/55R 16* | 95 | V | 690 | 240 | 36 |
| 195/50R 16* | 84 | V | 500 | 240 | 36 |
| 205/50ZR 16 RF* | 91 | W | 615 | 270 | 42 |
| 225/50ZR 16 RF* | 96 | W | 710 | 270 | 42 |
| 195/45R 16* | 80 | V | 450 | 240 | 36 |
| 205/45ZR 16 RF* | 87 | W | 545 | 270 | 42 |
| 205/40ZR 16 RF* | 83 | W | 487 | 270 | 42 |
| 215/40ZR 16 RF* | 86 | W | 530 | 270 | 42 |
| 225/40ZR 16* | 85 | W | 515 | 270 | 36 |
| 225/55ZR 17* | 97 | W | 730 | 270 | 36 |
| 205/50ZR 17 RF* | 93 | W | 650 | 270 | 42 |
| 215/50ZR 17* | 91 | W | 615 | 270 | 36 |
| 225/50ZR 17 RF* | 98 | W | 750 | 270 | 42 |
| 205/45ZR 17 RF* | 88 | W | 560 | 270 | 42 |
| 215/45ZR 17 RF* | 91 | W | 615 | 270 | 42 |
| 225/45ZR 17 RF* | 94 | W | 670 | 270 | 42 |
| 245/45ZR 17 RF* | 99 | W | 775 | 270 | 42 |
| 205/40ZR 17 RF* | 84 | W | 500 | 270 | 42 |
| 215/40ZR 17 RF* | 87 | W | 545 | 270 | 42 |
| 235/40ZR 17 RF* | 94 | W | 670 | 270 | 42 |
| 245/40ZR 17 RF* | 95 | W | 690 | 270 | 42 |
| 225/45ZR 18 RF* | 95 | W | 690 | 270 | 42 |
| 245/45ZR 18 RF* | 100 | W | 800 | 270 | 42 |
| 215/40ZR 18 RF* | 89 | W | 580 | 270 | 42 |
| 225/40ZR 18 RF* | 92 | W | 630 | 270 | 42 |
| 235/40ZR 18 RF* | 95 | W | 690 | 270 | 42 |
| 245/40ZR 18 RF* | 93 | W | 650 | 270 | 36 |
| 215/35ZR 18 RF* | 84 | W | 500 | 270 | 42 |
| 225/35ZR 18 RF* | 87 | W | 545 | 270 | 42 |
| 225/40ZR 19* | 89 | W | 580 | 270 | 36 |
| 245/40ZR 19 RF* | 98 | W | 750 | 270 | 42 |
| 255/40ZR 19 RF* | 100 | W | 800 | 270 | 42 |
| 225/35ZR 19 RF* | 88 | W | 560 | 270 | 42 |

*Sizes with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 5,50B, 5½J | 5,00B, 5J, 6,00B, 6J, 6½J | 188 | 554 | E | C | 70 | 2 |
| 5,50B, 5½J | 5,00B, 5J, 6,00B, 6J, 6½J | 188 | 554 | E | C | 70 | 2 |
| 6J | 5J, 5½J, 6½J | 194 | 562 | E | C | 70 | 2 |
| 6J | 5J, 5½J, 6½J | 194 | 562 | E | C | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 198 | 533 | E | C | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 194 | 591 | E | C | 70 | 2 |
| 6J | 5J, 5½J, 6½J | 194 | 591 | E | C | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 599 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 614 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 197 | 581 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 590 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 196 | 562 | E | C | 71 | 2 |
| 7J | 6½J, 7½J | 207 | 568 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 199 | 625 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 211 | 640 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 211 | 640 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 225 | 647 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 658 | C | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 197 | 611 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 617 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 230 | 636 | C | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 196 | 588 | E | C | 71 | 2 |
| 7J | 6½J, 7½J | 205 | 596 | E | C | 71 | 2 |
| 7½J | 7J, 8J | 204 | 576 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 204 | 582 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 230 | 588 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 227 | 685 | C | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 644 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 217 | 656 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 665 | C | C | 71 | 2 |
| 7J | 6½J, 7½J | 204 | 624 | E | C | 71 | 2 |
| 7J | 7½J, 8J | 210 | 636 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 227 | 638 | C | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 235 | 655 | C | B | 71 | 2 |
| 7½J | 7J, 8J | 210 | 601 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 208 | 609 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 236 | 627 | C | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 241 | 635 | C | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 225 | 666 | C | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 235 | 683 | C | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 210 | 638 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 226 | 645 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 233 | 653 | C | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 244 | 662 | E | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 218 | 615 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 222 | 624 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 226 | 670 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 245 | 687 | C | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 256 | 695 | C | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 220 | 649 | E | C | 71 | 2 |



petlas

# PT 721 VELOX SPORT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 205/55R 16* | 91 | V | 615 | 240 | 36 |

*Sizes with rim guard

# PT 731 VELOX SPORT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 205/55R 16* | 91 | H | 615 | 210 | 36 |
| 205/55R 16* | 91 | V | 615 | 240 | 36 |

*Sizes with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIAMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 639 | C | B | 69 | 2 |



| RIM | | INFLATED DIEMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 638 | C | B | 70 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 638 | C | B | 70 | 2 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

petlas

# PT 741 VELOX SPORT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 185/55 R14* | 80 | V | 450 | 240 | 36 |
| 185/55 R15* | 82 | V | 475 | 240 | 36 |
| 195/55 R15* | 85 | V | 515 | 240 | 36 |
| 195/50 R15* | 82 | V | 475 | 240 | 36 |
| 205/50 ZR15* | 86 | W | 530 | 270 | 36 |
| 215/60 R16 RF | 99 | V | 775 | 240 | 42 |
| 225/60 R16 | 98 | V | 750 | 240 | 36 |
| 235/60 ZR16* | 100 | W | 800 | 270 | 36 |
| 185/55 R16 RF* | 87 | H | 545 | 210 | 42 |
| 195/55 R16 RFT* | 87 | V | 545 | 240 | 36 |
| 195/55 R16* | 87 | V | 545 | 240 | 36 |
| 205/55 R16 RFT* | 91 | V | 615 | 240 | 36 |
| 205/55 ZR16 RF* | 94 | W | 670 | 270 | 42 |
| 215/55 ZR16 RF* | 97 | W | 730 | 270 | 42 |
| 225/55 ZR16 RF* | 99 | W | 775 | 270 | 42 |
| 195/50 R16 * | 84 | V | 500 | 240 | 36 |
| 205/50 ZR16 RF* | 91 | W | 615 | 270 | 42 |
| 225/50 ZR16 RF* | 96 | W | 710 | 270 | 42 |
| 195/45 R16 RF* | 84 | V | 500 | 240 | 42 |
| 205/45 ZR16 RF* | 87 | W | 545 | 270 | 42 |
| 215/45 R16 RF* | 90 | V | 600 | 240 | 42 |
| 205/40 ZR16 RF* | 83 | W | 487 | 270 | 42 |
| 215/40 ZR16 RF* | 86 | W | 530 | 270 | 42 |
| 205/55 ZR17* | 91 | W | 615 | 270 | 36 |
| 215/55 ZR17 RF* | 98 | W | 750 | 270 | 42 |
| 225/55 ZR17 RFT* | 97 | W | 730 | 270 | 36 |
| 225/55 ZR17 RF* | 101 | W | 825 | 270 | 42 |
| 235/55 ZR17 RF* | 103 | W | 875 | 270 | 42 |
| 205/50 ZR17 RFT* | 89 | W | 580 | 270 | 36 |
| 205/50 ZR17 RF* | 93 | W | 650 | 270 | 42 |
| 215/50 ZR17 RF* | 95 | W | 690 | 270 | 42 |
| 225/50 ZR17 RFT* | 94 | W | 670 | 270 | 36 |
| 225/50 ZR17 RF* | 98 | W | 750 | 270 | 42 |
| 205/45 ZR17 RF* | 88 | W | 560 | 270 | 42 |
| 215/45 ZR17 RF* | 91 | W | 615 | 270 | 42 |
| 225/45 ZR17 RF* | 94 | W | 670 | 270 | 42 |
| 225/45 ZR17 RFT* | 91 | W | 615 | 270 | 36 |
| 235/45 ZR17 RF* | 97 | W | 730 | 270 | 42 |
| 245/45 ZR17 RF* | 99 | W | 775 | 270 | 42 |
| 205/40 ZR17 RF* | 84 | W | 500 | 270 | 42 |
| 215/40 ZR17 RF* | 87 | W | 545 | 270 | 42 |
| 235/40 ZR17 RF* | 94 | W | 670 | 270 | 42 |
| 245/40 ZR17 RF* | 95 | W | 690 | 270 | 42 |
| 245/35 ZR17* | 87 | W | 545 | 270 | 36 |
| 235/55 ZR18 RF* | 104 | W | 900 | 270 | 42 |
| 235/50 ZR18 RF* | 101 | W | 825 | 270 | 42 |
| 245/50 ZR18* | 100 | W | 800 | 270 | 36 |
| 245/50 RF18 RFT* | 100 | W | 800 | 270 | 36 |
| 215/45 ZR18 RF* | 93 | W | 650 | 270 | 42 |

*Size with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIAMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 6J | 5J, 5½J, 6½J | 193 | 563 | E | C | 70 | 2 |
| 6J | 5J, 5½J, 6½J | 194 | 585 | E | C | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 200 | 595 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 196 | 582 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 587 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 225 | 665 | C | B | 71 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 233 | 677 | C | B | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 690 | C | B | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 191 | 610 | E | C | 70 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 620 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 620 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 635 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 632 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 228 | 642 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 654 | C | B | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 195 | 608 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 612 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 632 | C | B | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 195 | 582 | E | C | 71 | 2 |
| 7J | 6½J, 7½J | 206 | 596 | E | C | 71 | 2 |
| 7J | 7½J, 8J | 215 | 600 | E | B | 71 | 2 |
| 7½J | 7J, 8J | 212 | 570 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 218 | 580 | E | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 658 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 668 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 680 | E | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 688 | C | B | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 246 | 692 | C | B | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 640 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 638 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 648 | C | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 658 | E | B | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 658 | C | B | 71 | 2 |
| 7J | 6½J, 7½J | 206 | 623 | E | C | 71 | 2 |
| 7J | 7½J, 8J | 211 | 627 | C | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 222 | 642 | E | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 226 | 636 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 236 | 650 | C | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 652 | C | B | 71 | 2 |
| 7½J | 7J, 8J | 216 | 601 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 218 | 608 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 241 | 622 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 246 | 635 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 243 | 608 | E | B | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 246 | 718 | C | B | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 245 | 693 | C | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 245 | 708 | E | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 245 | 708 | E | B | 71 | 2 |
| 7J | 7½J, 8J | 213 | 655 | C | B | 71 | 2 |

*SEE NEXT PAGE FOR THE REST OF SIZES* ▶

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

petlas

# PT 741 VELOX SPORT

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 225/45 ZR18 **RFT*** | 91 | W | 615 | 270 | 36 |
| 225/45 ZR18 RF* | 95 | W | 690 | 270 | 42 |
| 235/45 ZR18 RF* | 98 | W | 750 | 270 | 42 |
| 245/45 ZR18 **RFT*** | 96 | W | 710 | 270 | 36 |
| 245/45 ZR18 RF* | 100 | W | 800 | 270 | 42 |
| 255/45 ZR18 RF* | 103 | W | 875 | 270 | 42 |
| 275/45 ZR18 RF* | 107 | W | 975 | 270 | 42 |
| 215/40 ZR18 RF* | 89 | W | 580 | 270 | 42 |
| 225/40 ZR18 RF* | 92 | W | 630 | 270 | 42 |
| 235/40 ZR18 RF* | 95 | W | 690 | 270 | 42 |
| 245/40 ZR18 **RFT*** | 93 | W | 650 | 270 | 36 |
| 245/40 ZR18* | 93 | W | 650 | 270 | 36 |
| 255/40 ZR18* | 95 | W | 690 | 270 | 36 |
| 215/35 ZR18 RF* | 84 | W | 500 | 270 | 42 |
| 225/35 ZR18 RF* | 87 | W | 545 | 270 | 42 |
| 245/35 ZR18 RF* | 92 | W | 630 | 270 | 42 |
| 255/35 ZR18 RF* | 94 | W | 670 | 270 | 42 |
| 265/35 ZR18 RF* | 97 | W | 730 | 270 | 42 |
| 275/35 ZR18 RF* | 99 | W | 775 | 270 | 42 |
| 275/40 ZR18 RF* | 103 | Y | 875 | 300 | 42 |
| 225/45 ZR19 RF* | 96 | W | 710 | 270 | 42 |
| 235/45 ZR19 RF* | 99 | W | 775 | 270 | 42 |
| 245/45 ZR19 **RFT*** | 98 | W | 750 | 270 | 36 |
| 245/45 ZR19 RF* | 102 | W | 850 | 270 | 42 |
| 255/45 ZR19 RF* | 104 | Y | 900 | 300 | 42 |
| 225/40 ZR19 RF* | 93 | W | 650 | 270 | 42 |
| 245/40 ZR19 RF* | 98 | W | 750 | 270 | 42 |
| 245/40 ZR19 **RFT*** | 94 | W | 670 | 270 | 36 |
| 255/40 ZR19 RF* | 100 | W | 800 | 270 | 42 |
| 265/40 ZR19 RF* | 102 | W | 850 | 270 | 42 |
| 275/40 ZR19 RF* | 105 | Y | 925 | 300 | 42 |
| 285/40 ZR19 RF* | 107 | W | 975 | 270 | 42 |
| 215/35 ZR19 RF* | 85 | W | 515 | 270 | 42 |
| 235/35 ZR19 RF* | 91 | W | 615 | 270 | 42 |
| 245/35 ZR19 RF* | 93 | W | 650 | 270 | 42 |
| 255/35 ZR19 RF* | 96 | W | 710 | 270 | 42 |
| 255/35 RF19 **RFT*** | 92 | W | 630 | 270 | 36 |
| 275/35 ZR19 RF* | 100 | W | 800 | 270 | 42 |
| 265/30 ZR19 RF* | 93 | W | 650 | 270 | 42 |
| 275/30 ZR19 RF* | 96 | W | 710 | 270 | 42 |
| 245/40 ZR20 RF* | 99 | W | 775 | 270 | 42 |
| 255/40 ZR20 RF* | 101 | W | 825 | 270 | 42 |
| 245/35 ZR20 RF* | 95 | W | 690 | 270 | 42 |
| 255/35 ZR20 RF* | 97 | W | 730 | 270 | 42 |
| 275/30 ZR20 RF* | 97 | W | 730 | 270 | 42 |

*Size with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIAMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 7½J | 7J, 8J, 8½J | 226 | 660 | E | B | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 225 | 659 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 236 | 669 | C | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 677 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 677 | C | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 257 | 692 | C | B | 72 | 2 |
| 9J | 8½J, 9½J, 10J, 10½J | 269,8 | 705,6 | C | B | 73 | 2 |
| 7½J | 7J, 8J, 8½J | 217 | 633 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 230 | 637 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 241 | 645 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 245 | 662 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 244 | 660 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 257 | 660 | E | B | 72 | 2 |
| 7½J | 7J, 8J, 8½J | 216 | 613 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 227 | 625 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 242 | 636 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 253 | 639 | E | B | 72 | 2 |
| 9½J | 9J, 10J, 10½J | 268 | 647 | C | B | 72 | 2 |
| 9½J | 9J, 10J, 10½J, 11J | 270 | 656 | E | B | 72 | 2 |
| 9½J | 9J, 10J, 10½, 11J | 283,2 | 673,5 | C | B | 73 | 2 |
| 7½J | 7J, 8J, 8½J | 225 | 693 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 238 | 694 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 703 | E | B | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 703 | C | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 257 | 718 | C | B | 72 | 2 |
| 8J | 7½J, 8½J, 9J | 230 | 663 | C | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 248 | 683 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 248 | 682 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 258 | 692 | C | B | 72 | 2 |
| 9½J | 9J, 10J, 10½J | 274,8 | 690 | E | B | 73 | 2 |
| 9½J | 9J, 10J, 10½, 11J | 283 | 697 | C | B | 73 | 2 |
| 10J | 9½J, 10½, 11J | 291,4 | 707,9 | C | B | 74 | 2 |
| 7½J | 7J, 8J, 8½J | 217 | 640 | E | B | 71 | 2 |
| 8J | 8½J, 9J, 9½J | 236 | 654 | E | B | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 241 | 662 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 253 | 665 | E | B | 72 | 2 |
| 9J | 8½J, 9½J, 10J | 254 | 664 | E | B | 72 | 2 |
| 9½J | 9J, 10J, 10½J, 11J | 268 | 682 | E | B | 73 | 2 |
| 9½J | 9J, 10J | 266,2 | 645,8 | E | B | 73 | 2 |
| 9½J | 9J, 10J | 270,2 | 649.3 | E | B | 73 | 2 |
| 8½J | 8J, 9J, 9½J | 244 | 710 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 257 | 711 | E | B | 72 | 2 |
| 8½J | 8J, 8½J, 9J, 9½J | 243 | 689 | E | B | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 254 | 692 | E | B | 72 | 2 |
| 9½J | 9J, 10J | 269,5 | 676,5 | E | B | 73 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

# W 601 SNOW MASTER

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 155/80R 13 | 79 | T | 437 | 190 | 35 |
| 165/80R 13 | 83 | T | 487 | 190 | 35 |
| 145/70R 13 | 71 | T | 345 | 190 | 36 |
| 155/70R 13 | 75 | T | 387 | 190 | 36 |
| 165/70R 13 | 79 | T | 437 | 190 | 36 |
| 165/70R 13 RF | 83 | T | 487 | 190 | 42 |
| 175/70R 13 | 82 | T | 475 | 190 | 36 |
| 185/70R 13 | 86 | T | 530 | 190 | 36 |
| 155/65R 13 | 73 | T | 365 | 190 | 36 |
| 165/65R 13 | 77 | T | 412 | 190 | 36 |
| 175/65R 13 | 80 | T | 450 | 190 | 36 |
| 175/80R 14 | 88 | T | 560 | 190 | 35 |
| 165/70R 14 | 81 | T | 462 | 190 | 36 |
| 165/70R 14 RF | 85 | R | 515 | 170 | 42 |
| 175/70R 14 | 84 | T | 500 | 190 | 36 |
| 175/70R 14 RF | 88 | T | 560 | 190 | 42 |
| 185/70R 14 | 88 | T | 560 | 190 | 36 |
| 195/70R 14 | 91 | T | 615 | 190 | 36 |
| 155/65R 14 | 75 | T | 387 | 190 | 36 |
| 165/65R 14 | 79 | T | 437 | 190 | 36 |
| 175/65R 14 | 82 | T | 475 | 190 | 36 |
| 175/65R 14 RF | 86 | T | 530 | 190 | 42 |
| 185/65R 14 | 86 | T | 530 | 190 | 36 |
| 165/60R 14 | 75 | T | 387 | 190 | 36 |
| 195/70R 15 RF | 97 | T | 730 | 190 | 42 |
| 175/65R 15 | 84 | T | 500 | 190 | 36 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J | 156 | 580 | F | E | 71 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J,5,50B, 5½J | 168 | 595 | E | E | 71 | 2 |
| 4,50B, 4½J | 3,50B, 3½J, 4,00B, 4J, 5,00B, 5J | 144 | 537 | F | E | 71 | 2 |
| 4,50B, 4½J | 4,00B, 4J, 5,00B, 5J | 152 | 554 | F | E | 71 | 2 |
| 5,00B, 5J | 4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J | 167 | 566 | E | E | 71 | 2 |
| 5,00B, 5J | 4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J | 167 | 566 | E | E | 71 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 177 | 580 | E | E | 71 | 2 |
| 5,50B, 5½J | 4,50B, 4½J, 5,00B, 5J, 6,00B, 6J | 193 | 593 | E | E | 71 | 2 |
| 4,50B, 4½J | 5,00B, 5J, 5,50B, 5½J | 154 | 536 | F | E | 71 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J | 170 | 553 | E | E | 71 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6,00B, 6J | 175 | 560 | E | E | 71 | 2 |
| 5J | 4½J, 5½J, 6J | 177 | 636 | E | E | 71 | 2 |
| 5,00B, 5J | 4J, 4,50B, 4½J, 5,50B, 5½J | 169 | 590 | E | E | 71 | 2 |
| 5,00B, 5J | 4J, 4,50B, 4½J, 5,50B, 5½J | 169 | 590 | E | E | 71 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 177 | 606 | E | E | 71 | 2 |
| 5,00B, 5J | 4½J, 5,50B, 5½J, 6J | 177 | 606 | E | E | 71 | 2 |
| 5½J | 4½J, 5J, 6J | 191 | 618 | E | E | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 201 | 635 | E | E | 71 | 2 |
| 4,50B, 4½J | 5,00B, 5J, 5,50B, 5½J | 155 | 562 | F | E | 71 | 2 |
| 5,00B, 5J | 4,50B, 4½J, 5,50B, 5½J, 6J | 172 | 575 | E | E | 71 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 174 | 587 | E | E | 71 | 2 |
| 5,00B, 5J | 5,50B, 5½J, 6J | 174 | 587 | E | E | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 602 | E | E | 71 | 2 |
| 5,00B, 5J | 4½J, 5½J, 6J | 168 | 560 | E | E | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 203 | 659 | E | E | 71 | 2 |
| 5J | 5½J, 6J | 174 | 612 | E | E | 71 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

# W 651 SNOW MASTER

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 185/60R 14 | 82 | H | 475 | 210 | 36 |
| 195/60R 14 | 86 | H | 530 | 210 | 36 |
| 185/55R 14 | 80 | H | 450 | 210 | 36 |
| 185/65R 15 | 88 | H | 560 | 210 | 36 |
| 185/65R 15 RF | 92 | H | 630 | 210 | 42 |
| 195/65R 15 | 91 | H | 615 | 210 | 36 |
| 195/65R 15 RF | 95 | H | 690 | 210 | 42 |
| 205/65R 15 | 94 | H | 670 | 210 | 36 |
| 215/65R 15 | 96 | H | 710 | 210 | 36 |
| 185/60R 15 | 84 | H | 500 | 210 | 36 |
| 195/60R 15 | 88 | H | 560 | 210 | 36 |
| 205/60R 15 | 91 | H | 615 | 210 | 36 |
| 185/55R 15 | 82 | H | 475 | 210 | 36 |
| 195/55R 15 | 85 | H | 515 | 210 | 36 |
| 205/55R 15 | 88 | V | 560 | 240 | 36 |
| 205/55R 15 RF | 92 | V | 630 | 240 | 42 |
| 195/50R 15* | 82 | H | 475 | 210 | 36 |
| 205/50R 15* | 86 | H | 530 | 210 | 36 |
| 205/65R 16 | 95 | H | 690 | 210 | 36 |
| 215/65R 16 | 98 | H | 750 | 210 | 36 |
| 215/65R 16 RF | 102 | T | 850 | 190 | 42 |
| 205/60R 16 | 92 | H | 630 | 210 | 36 |
| 215/60R 16 | 95 | H | 690 | 210 | 36 |
| 225/60R 16 | 98 | H | 750 | 210 | 36 |
| 235/60R 16 | 100 | H | 800 | 210 | 36 |
| 185/55R 16 RF* | 87 | H | 545 | 210 | 42 |
| 195/55R 16 | 87 | H | 545 | 210 | 36 |
| 205/55R 16 | 91 | H | 615 | 210 | 36 |
| 205/55R 16 RFT* | 91 | H | 615 | 210 | 36 |
| 215/55R 16 | 93 | H | 650 | 210 | 36 |
| 225/55R 16 | 95 | H | 690 | 210 | 36 |
| 195/50R 16 * | 84 | H | 500 | 210 | 36 |
| 205/50R 16* | 87 | H | 545 | 210 | 36 |
| 205/50R 16 RF | 91 | H | 615 | 210 | 42 |
| 225/50R 16 RF* | 96 | V | 710 | 240 | 42 |
| 195/45R 16 RF* | 85 | H | 515 | 210 | 42 |
| 205/45R 16 RF* | 87 | H | 545 | 210 | 42 |
| 215/45R 16 RF* | 90 | V | 600 | 240 | 42 |
| 205/55R 17* | 91 | H | 615 | 210 | 36 |
| 215/55R 17 RF | 98 | V | 750 | 240 | 42 |
| 225/55R 17 | 97 | H | 730 | 210 | 36 |
| 225/55R 17 RF | 101 | V | 825 | 240 | 42 |
| 225/55RF 17 RFT | 97 | V | 730 | 240 | 36 |
| 235/55R 17 RF* | 103 | V | 875 | 240 | 42 |
| 205/50R 17 RF* | 93 | V | 650 | 240 | 42 |
| 215/50R 17 RF* | 91 | H | 615 | 210 | 36 |
| 225/50R 17 RF* | 98 | V | 750 | 240 | 42 |
| 205/45R 17 RF* | 88 | H | 560 | 210 | 42 |
| 215/45R 17 RF* | 91 | V | 615 | 240 | 42 |
| 225/45R 17 RF* | 94 | V | 670 | 240 | 42 |
| 235/45R 17 RF* | 97 | V | 730 | 240 | 42 |
| 245/45R 17 RF* | 99 | V | 775 | 240 | 42 |
| 245/40R 17 RF* | 95 | V | 690 | 240 | 42 |
| 215/50R 18 | 92 | V | 630 | 240 | 36 |
| 245/50R 18 RF* | 104 | V | 900 | 240 | 42 |
| 215/45R 18 RF* | 93 | V | 650 | 240 | 42 |
| 225/45R 18 RF* | 95 | V | 690 | 240 | 42 |
| 235/45R 18 RF* | 98 | V | 750 | 240 | 42 |
| 245/45R 18 RF* | 100 | V | 800 | 240 | 42 |
| 225/40R 18 RF* | 92 | V | 630 | 240 | 42 |
| 235/40R 18 RF* | 95 | V | 690 | 240 | 42 |
| 245/40R 18 RF* | 97 | V | 730 | 240 | 42 |
| 235/50R 19 RF* | 103 | V | 875 | 240 | 42 |
| 245/45R 19 RF* | 102 | V | 850 | 240 | 42 |
| 245/40R 19 RF* | 98 | V | 750 | 240 | 42 |
| 255/40R 19 RF* | 100 | V | 800 | 240 | 42 |

*Sizes with rim guard



| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 5½J | 5J, 6J, 6½J | 189 | 581 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 592 | E | C | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 192 | 564 | E | C | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 627 | E | C | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 190 | 627 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 640 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 201 | 640 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 207 | 652 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 661 | E | C | 71 | 2 |
| 5½J | 5J, 6J, 6½J | 189 | 608 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 198 | 622 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 208 | 631 | E | C | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 191 | 592 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 195 | 604 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 610 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 213 | 610 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 196 | 583 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 210 | 590 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 209 | 675 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 686 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 690 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J, 7½J | 209 | 657 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 667 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 228 | 680 | E | C | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 241 | 690 | E | C | 71 | 2 |
| 6J | 5J, 5½J, 6½J | 192 | 615 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 196 | 629 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 635 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 215 | 635 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 642 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 230 | 658 | E | C | 71 | 2 |
| 6J | 5½J, 6½J, 7J | 196 | 608 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 209 | 614 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 209 | 614 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 222 | 640 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 195 | 586 | E | C | 71 | 2 |
| 7J | 6½J 7J 7½J | 203 | 595 | E | C | 71 | 2 |
| 7J | 7½J, 8J | 211 | 604 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 209 | 659 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 221 | 674 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 688 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 688 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228.5 | 686 | F | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 240 | 690 | E | C | 71 | 2 |
| 6½J | 5½J, 6J, 7J, 7½J | 214 | 638 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 217 | 655 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 221 | 666 | E | C | 71 | 2 |
| 7J | 6½J, 7½J | 206 | 619 | E | C | 71 | 2 |
| 7J | 7½J, 8J | 206 | 633 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 223 | 642 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 230 | 648 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 243 | 661 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 244 | 632 | E | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 217 | 674 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 246 | 710 | C | C | 71 | 2 |
| 7J | 7½J, 8J | 225 | 652 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 223 | 662 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 236 | 669 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 236 | 684 | E | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 230 | 644 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 237 | 650 | E | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 240 | 661 | E | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 237 | 727 | C | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J | 241 | 708 | C | C | 71 | 2 |
| 8½J | 8J, 9J, 9½J | 244 | 684 | E | C | 71 | 2 |
| 9J | 8½J, 9½J, 10J | 262 | 689 | C | C | 72 | 2 |



petlas

# PT 411 EXPLERO A/S

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) |
|---|---|---|---|---|---|
| 235/75R 15 | 105 | H | 925 | 210 | 36 |
| 205/70R 15 | 96 | H | 710 | 210 | 36 |
| 215/70R 15 | 98 | H | 750 | 210 | 36 |
| 215/70R 16 | 100 | H | 800 | 210 | 36 |
| 225/70R 16 RF | 107 | T | 975 | 190 | 42 |
| 235/70R 16 | 106 | H | 950 | 210 | 36 |
| 245/70R 16 | 107 | H | 975 | 210 | 36 |
| 255/70R 16 | 111 | T | 1090 | 190 | 36 |
| 265/70R 16 | 112 | T | 1120 | 190 | 36 |
| 215/65R 16 | 98 | H | 750 | 210 | 36 |
| 215/65R 16 RF | 102 | H | 850 | 210 | 42 |
| 255/65R 16 | 109 | H | 1030 | 210 | 36 |
| 215/60R 16 | 95 | H | 690 | 210 | 36 |
| 235/60R 16 | 100 | H | 800 | 210 | 36 |
| 215/65R 17 | 99 | H | 775 | 210 | 36 |
| 225/65R 17 | 102 | H | 850 | 210 | 36 |
| 235/65R 17 RF | 108 | H | 1000 | 210 | 42 |
| 245/65R 17 RF | 111 | H | 1090 | 210 | 42 |
| 255/65R 17 | 110 | H | 1060 | 210 | 36 |
| 265/65R 17 | 112 | H | 1120 | 210 | 36 |
| 225/60R 17 RF | 103 | H | 875 | 210 | 42 |

# PT 421 EXPLERO A/T

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) |
|---|---|---|---|---|---|
| 215/80R 15* | 102 | S | 850 | 180 | 35 |
| 235/75R 15* | 105 | T | 925 | 190 | 36 |
| 255/70R 15* | 108 | T | 1000 | 190 | 36 |
| 265/70R 15* | 112 | T | 1120 | 190 | 36 |
| 265/70R 15 RF | 116 | T | 1250 | 190 | 42 |
| 215/65R 16* | 98 | T | 750 | 190 | 36 |
| 205/80R 16 RF* | 104 | T | 900 | 190 | 42 |
| 235/70R 16* | 106 | T | 950 | 190 | 36 |
| 245/70R 16 RF* | 111 | T | 1090 | 190 | 42 |
| 265/65R 17 RF* | 116 | S | 1250 | 180 | 42 |
| 265/60R 18 RF* | 114 | T | 1180 | 190 | 42 |

*Sizes with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 6½J | 6J, 7J, 7½J, 8J | 241 | 728 | C | E | 71 | 2 |
| 6J | 5J, 5½J, 6½J, 7J | 209 | 674 | E | E | 70 | 2 |
| 6½J | 5½J, 6J, 7J | 229 | 680 | E | E | 70 | 2 |
| 6½J | 5½J, 6J, 7J | 229 | 705 | C | E | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 234 | 719 | C | E | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 246 | 731 | C | E | 71 | 2 |
| 7J | 6½J, 7½J, 8J | 248 | 750 | C | E | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 260 | 764 | C | E | 72 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 272 | 778 | C | E | 72 | 2 |
| 6½J | 6J, 7J, 7½J | 224 | 689 | E | E | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 224 | 689 | C | E | 70 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 264 | 734 | C | E | 72 | 2 |
| 6½J | 6J, 7J, 7½J | 222 | 662 | E | E | 70 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 241 | 684 | C | E | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 222 | 712 | E | E | 70 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 230 | 724 | C | E | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 739 | C | E | 71 | 2 |
| 7J | 7½J, 8J, 8½J | 247 | 748 | C | E | 71 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 263 | 761 | C | E | 72 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 276 | 773 | C | E | 72 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 228 | 703 | C | E | 71 | 2 |



| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | ⛽ | 🌧 | DB | 🔊 |
| 6J | 5½J, 6½J, 7J | 218 | 728 | E | E | 71 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 244 | 726 | E | E | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 271 | 732 | E | E | 72 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 273 | 746 | E | E | 72 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 273 | 746 | E | E | 73 | 2 |
| 6½J | 6J, 7J, 7½J | 228 | 678 | E | E | 71 | 2 |
| 5½J | 5J, 6J, 6½J, 7J | 209 | 727 | E | E | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 241 | 731 | E | E | 71 | 2 |
| 7J | 6½J, 7½J, 8J | 248 | 750 | E | E | 71 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 274 | 771 | E | E | 73 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 263 | 773 | E | E | 73 | 2 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

petlas

# PT 431 EXLERO H/T

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE (Psi/Bar) |
|---|---|---|---|---|---|
| 235/65R 17 RF | 108 | V | 1000 | 240 | 42 |
| 215/60R 17* | 96 | V | 710 | 240 | 36 |
| 235/60R 17* | 102 | V | 850 | 240 | 36 |
| 255/60R 17* | 106 | V | 950 | 240 | 36 |
| 225/60R 18* | 100 | H | 800 | 210 | 36 |
| 235/60R 18 RF* | 107 | V | 975 | 240 | 42 |
| 245/60R 18* | 105 | H | 925 | 210 | 36 |
| 255/60R 18 RF* | 112 | V | 1120 | 240 | 42 |
| 265/60R 18* | 110 | H | 1060 | 210 | 36 |
| 265/60R 18* | 110 | V | 1060 | 240 | 36 |
| 225/55R 17* | 97 | V | 730 | 240 | 36 |
| 235/55R 17 RF* | 103 | V | 875 | 240 | 42 |
| 215/55R 18* | 95 | H | 690 | 210 | 36 |
| 225/55R 18* | 98 | V | 750 | 240 | 36 |
| 235/55R 18* | 100 | V | 800 | 240 | 36 |
| 255/55R 18 RF* | 109 | V | 1030 | 240 | 42 |
| 225/55R 19* | 99 | H | 775 | 210 | 36 |
| 235/55R 19 RF* | 105 | V | 925 | 240 | 42 |
| 245/55R 19* | 103 | H | 875 | 210 | 36 |
| 255/55R 19 RF* | 111 | V | 1090 | 240 | 42 |
| 275/55R 19* | 111 | V | 1090 | 240 | 36 |
| 235/50R 18 RF* | 101 | V | 825 | 240 | 42 |
| 255/50R 19 RF* | 107 | V | 975 | 240 | 42 |
| 255/50ZR 19 RFT* | 107 | W | 975 | 270 | 42 |
| 265/50ZR 19 RF* | 110 | W | 1060 | 270 | 42 |
| 275/45ZR 19 RF* | 108 | W | 1000 | 270 | 42 |
| 285/45R 19* | 107 | V | 975 | 240 | 36 |
| 275/45ZR 20 RF* | 110 | W | 1060 | 270 | 42 |
| 275/40ZR 20* | 102 | W | 850 | 270 | 36 |

*Sizes with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIEMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 738 | B | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 221 | 690 | C | C | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 714 | C | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 260 | 736 | C | C | 72 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 228 | 727 | B | C | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 739 | B | C | 71 | 2 |
| 7J | 7½J, 8J, 8½J | 248 | 751 | B | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 261 | 763 | B | C | 72 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 272 | 775 | B | C | 72 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 272 | 775 | B | C | 72 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 680 | C | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 245 | 690 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 226 | 693 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 705 | C | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 245 | 715 | C | C | 71 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 262 | 735 | B | C | 72 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 233 | 731 | C | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 245 | 741 | C | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 253 | 753 | C | C | 71 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 260 | 761 | B | C | 72 | 2 |
| 8½J | 7½J, 8J, 9J, 9½J | 283 | 783 | B | C | 72 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 240 | 688 | B | C | 71 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 265 | 739 | B | C | 72 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 258 | 745 | C | C | 72 | 2 |
| 8½J | 7½J, 8J, 9J, 9½J | 277 | 749 | B | C | 72 | 2 |
| 9J | 8½J, 9½J, 10J, 10½J | 268 | 731 | B | C | 72 | 2 |
| 9½J | 9J, 10J, 10½J | 283 | 740 | B | C | 72 | 2 |
| 9J | 8½J, 9½J, 10J, 10½J | 270 | 758 | B | C | 72 | 2 |
| 9½J | 9J, 10J, 10½J 11J | 273 | 729 | B | C | 72 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

# W 671 EXPLERO

| TIRE SIZE | LOAD INDEX | SPEED INDEX | LOAD CAPACITY(kg) | SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) |
|---|---|---|---|---|---|
| 235/75R 15 RF | 109 | T | 1030 | 190 | 42 |
| 205/70R 15 | 96 | T | 710 | 190 | 42 |
| 215/70R 15 | 98 | H | 750 | 210 | 42 |
| 205/80R 16 RF | 104 | T | 900 | 190 | 42 |
| 215/70R 16 RF | 104 | H | 900 | 210 | 36 |
| 225/70R 16 RF | 107 | H | 975 | 210 | 42 |
| 235/70R 16 | 106 | T | 950 | 190 | 42 |
| 245/70R 16 | 111 | T | 1090 | 190 | 42 |
| 255/70R 16 | 111 | T | 1090 | 190 | 42 |
| 265/70R 16 | 112 | T | 1120 | 190 | 36 |
| 215/65R 17 | 99 | H | 775 | 210 | 42 |
| 225/65R 17 RF | 106 | H | 950 | 210 | 42 |
| 235/65R 17 RF | 108 | V | 1000 | 240 | 36 |
| 245/65R 17 RF | 111 | H | 1090 | 210 | 36 |
| 255/65R 17 RF | 114 | H | 1180 | 210 | 42 |
| 265/65R 17 RF | 116 | H | 1250 | 210 | 42 |
| 215/60R 17 RF | 100 | H | 800 | 210 | 36 |
| 225/60R 17 RF | 103 | V | 875 | 240 | 42 |
| 235/60R 17 RF | 106 | H | 950 | 210 | 36 |
| 255/60R 17 RF | 110 | V | 1060 | 240 | 42 |
| 235/55R 17 RF* | 103 | V | 875 | 240 | 42 |
| 225/60R 18 RF | 104 | V | 900 | 240 | 36 |
| 235/60R 18 RF | 107 | H | 975 | 210 | 42 |
| 245/60R 18 | 105 | H | 925 | 210 | 42 |
| 255/60R 18 RF | 112 | H | 1120 | 210 | 42 |
| 265/60R 18 RF* | 114 | H | 1180 | 210 | 42 |
| 215/55R 18* | 95 | H | 690 | 210 | 42 |
| 225/55R 18 RF* | 102 | H | 850 | 210 | 42 |
| 235/55R 18 RF* | 104 | H | 900 | 210 | 42 |
| 255/55R 18 RF* | 109 | V | 1030 | 240 | 36 |
| 235/50R 18 RF* | 101 | V | 825 | 240 | 42 |
| 225/55R 19* | 99 | H | 775 | 210 | 42 |
| 235/55R 19 RF* | 105 | V | 925 | 240 | 42 |
| 245/55R 19* | 103 | H | 875 | 210 | 42 |
| 255/55R 19 RF* | 111 | V | 1090 | 240 | 42 |
| 275/55R 19* | 111 | H | 1090 | 210 | 42 |
| 235/50R 19 RF* | 103 | V | 875 | 240 | 36 |
| 255/50R 19 RF* | 107 | V | 975 | 240 | 36 |
| 255/50R 19 RFT* | 107 | V | 975 | 240 | 42 |
| 225/45R 19 RF* | 96 | V | 710 | 240 | 36 |
| 285/45R 19 RF* | 111 | H | 1090 | 210 | 41 |
| 245/50R 20* | 102 | V | 850 | 240 | 42 |
| 265/50R 20 RF* | 111 | H | 1090 | 210 | 42 |
| 275/45R 20 RF* | 110 | V | 1060 | 240 | 36 |
| 275/40R 20 RF* | 106 | V | 950 | 240 | 42 |

*Sizes with rim guard



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|
| RECOM. (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 8J | 7J, 7½J, 8½J, 9J | 258 | 748 | C | C | 71 | 2 |
| 9J | 8½J, 9½J, 10J, 10½J | 266 | 760 | E | C | 73 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 228 | 735 | E | C | 70 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 238 | 698 | E | C | 70 | 2 |
| 7½J | 7J, 8J, 8½J | 255 | 755 | E | C | 71 | 2 |
| 7½J | 7J, 8J, 8½J | 227 | 688 | C | C | 70 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 228 | 711 | C | C | 70 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 261 | 743 | C | C | 71 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 262 | 765 | C | C | 71 | 2 |
| 7J | 6J, 6½J, 7½J | 222 | 699 | C | C | 70 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 244 | 721 | E | C | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 217 | 694 | C | C | 70 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 230 | 732 | C | C | 70 | 2 |
| 8½J | 7½J, 8J, 9J, 9½J | 283 | 785 | C | C | 72 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 265 | 739 | C | C | 71 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 744 | C | C | 70 | 2 |
| 6½J | 6J, 7J, 7½J | 218 | 711 | E | C | 70 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 227 | 706 | C | C | 70 | 2 |
| 7J | 7½J, 8J, 8½J | 255 | 755 | C | C | 70 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 250 | 741 | C | C | 70 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 245 | 719 | C | C | 70 | 2 |
| 7½J | 7J, 8J, 8½J | 248 | 753 | C | C | 70 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 244 | 694 | C | C | 70 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 272 | 775 | C | C | 72 | 2 |
| 8½J | 7½J, 8J, 9J, 9½J | 277 | 774 | C | C | 72 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 260 | 766 | C | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J | 233 | 724 | E | C | 70 | 2 |
| 7J | 7½J, 8J, 8½J | 243 | 752 | C | C | 70 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 717 | C | C | 70 | 2 |
| 8J | 7J, 7½J, 8½J, 9J | 272 | 778 | C | C | 71 | 2 |
| 8J | 7½J, 8½J, 9J, 9½J | 273 | 774 | C | C | 71 | 2 |
| 9½J | 9J, 10J, 10½J | 285 | 739 | C | C | 72 | 2 |
| 9½J | 9J, 10J, 10½J 11J | 278 | 728 | C | C | 73 | 2 |
| 6½J | 5½J, 6J, 7J | 224 | 710 | C | C | 70 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 229 | 726 | C | C | 70 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 260 | 762 | C | C | 71 | 2 |
| 7½J | 6½J, 7J, 8J, 8½J | 260 | 764 | C | C | 71 | 2 |
| 6J | 5J, 5½J, 6½J, 7J | 212 | 667 | C | C | 70 | 2 |
| 7J | 6½J, 7½J, 8J, 8½J | 240 | 738 | E | C | 70 | 2 |
| 6½J | 5½J, 6J, 7J | 225 | 680 | E | C | 70 | 2 |
| 5½J | 5J, 6J, 6½J, 7J | 209 | 728 | C | C | 70 | 2 |
| 7½J | 7J, 8J, 8½J, 9J | 260 | 738 | E | C | 71 | 2 |
| 6½J | 6J, 7J, 7½J, 8J | 235 | 732 | C | C | 70 | 2 |
| 7J | 6J, 6½J, 7½J, 8J | 240 | 736 | C | C | 70 | 2 |
| 7J | 6½J, 7½J, 8J | 248 | 750 | E | C | 70 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

## PT 825 FULL POWER

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 195R 14 C | 8PR | 106/104 | R | 1900 | 3600 |
| 195R 15 C | 8PR | 106/104 | R | 1900 | 3600 |
| 225/70 R 15 C | 8PR | 112/110 | R | 2240 | 4240 |
| 225/70 R 15 C | 16PR | 116/114 | R | 2500 | 4720 |

## PT 825 FULL POWER PLUS

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 5,00R 12 C | 8PR | 83/81 | P | 974 | 1848 |
| 155R 12 C | 8PR | 88/86 | N | 1120 | 2120 |
| 155R 13 C | 6PR | 85/83 | N | 1030 | 1948 |
| 185R 14 C | 8PR | 102/100 | R | 1700 | 3200 |
| 165/70R 14 C | 6PR | 89/87 | R | 1160 | 2180 |
| 185R 15 C | 8PR | 103/102 | R | 1750 | 3400 |
| 195/70R 15 C | 8PR | 104/102 | R | 1800 | 3400 |
| 205/70R 15 C | 8PR | 106/104 | R | 1900 | 3600 |
| 215/70R 15 C | 8PR | 109/107 | S | 2060 | 3900 |
| 205/65R 15 C | 8PR | 102/100 | T | 1700 | 3200 |
| 175/75R 16 C | 8PR | 101/99 | R | 1650 | 3100 |
| 185/75R 16 C | 8PR | 104/102 | R | 1800 | 3400 |
| 195/75R 16 C | 8PR | 107/105 | R | 1950 | 3700 |
| 205/75R 16 C | 8PR | 110/108 | R | 2120 | 4000 |
| 205/75R 16 C | 10PR | 113/111 | R | 2300 | 4360 |
| 215/75R 16 C | 8PR | 113/111 | R | 2300 | 4360 |
| 215/75R 16 C | 10PR | 116/114 | R | 2500 | 4720 |
| 225/75R 16 C | 8PR | 118/116 | R | 2640 | 5000 |
| 205/65R 16 C | 8PR | 107/105 | T | 1950 | 3700 |
| 215/65R 16 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/65R 16 C | 8PR | 112/110 | R | 2240 | 4240 |
| 235/65R 16 C | 8PR | 115/113 | R | 2430 | 4600 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 170 | 65 | 5½J | 5J, 6J | 196 | 669 | E | A | 72 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 196 | 691 | E | A | 72 | 2 |
| 170 | 65 | 6½J | 6J, 7J | 228 | 697 | E | A | 72 | 2 |
| 170 | 80 | 6½J | 6J, 7J | 228 | 697 | E | A | 72 | 2 |



| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 150 | 65 | 3½J | 3½J | 141 | 565 | F | B | 71 | 2 |
| 140 | 65 | 4½J | 4,00B, 4,50B, 4J, 5J | 155 | 552 | F | B | 72 | 2 |
| 140 | 51 | 4½J | 4,00B, 4,50B, 4J, 5,00B, 5J | 154 | 573 | F | B | 72 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 185 | 650 | E | A | 71 | 2 |
| 170 | 54 | 5J | 4½J | 167 | 592 | E | B | 72 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 186 | 675 | E | A | 71 | 2 |
| 170 | 65 | 6J | 5J, 5½J | 196 | 651 | E | A | 72 | 2 |
| 170 | 65 | 6J | 5½J, 6½J | 206 | 668 | E | A | 72 | 2 |
| 180 | 65 | 6½J | 5½J, 6J, 7J | 222 | 679 | E | A | 72 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 206 | 650 | C | A | 71 | 2 |
| 170 | 69 | 5J | 4 ½ J, 5½J, | 170 | 668 | E | A | 72 | 2 |
| 170 | 69 | 5J | 5½J, 6J | 180 | 684 | E | A | 72 | 2 |
| 170 | 69 | 5½J | 5J, 6J | 192 | 698 | E | A | 72 | 2 |
| 170 | 69 | 5½J | 6J, 6½J | 200 | 712 | E | A | 72 | 2 |
| 170 | 76 | 5½J | 6J, 6½J | 200 | 712 | E | A | 72 | 2 |
| 170 | 69 | 6J | 5½J, 6½J, 7J | 216 | 734 | E | A | 72 | 2 |
| 170 | 76 | 6J | 5½J, 6½J, 7J | 216 | 734 | E | A | 72 | 2 |
| 170 | 76 | 6J | 6½J, 7J | 224 | 740 | E | A | 72 | 2 |
| 190 | 69 | 6J | 5½J, 6½J | 206 | 677 | C | A | 71 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 219 | 684 | E | A | 72 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 223 | 702 | E | A | 72 | 2 |
| 170 | 69 | 7J | 6½J, 7½J | 238 | 717 | E | A | 72 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

## PT 835 FULL POWER

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 215/65R 15 C | 6PR | 104/102 | T | 1800 | 3400 |
| 225/70R 15 C | 8PR | 112/110 | R | 2240 | 4240 |
| 195/60R 16 C | 6PR | 99/97 | T | 1550 | 2920 |
| 285/65R 16 C | 10PR | 128 | N | 3600 | - |
| 235/65R 16 C | 12PR | 121/119 | R | 2900 | 5440 |
| 235/65R 16 C | 8PR | 115/113 | R | 2430 | 4600 |
| 215/65R 16 C | 8PR | 109/107 | T | 2060 | 3900 |
| 205/65R 16 C | 8PR | 107/105 | T | 1950 | 3700 |
| 195/65R 16 C | 8PR | 104/102 | T | 1800 | 3400 |
| 215/75R 16 C | 10PR | 116/114 | R | 2500 | 4720 |
| 215/75R 16 C | 8PR | 113/111 | R | 2300 | 4360 |
| 205/75R 16 C | 8PR | 110/108 | R | 2120 | 4000 |

## PT 825 ADVENTE

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 155R 12 C | 8PR | 88/86 | N | 1120 | 2120 |
| 155R 13 C | 8PR | 90/89 | N | 1200 | 2320 |
| 185R 14 C | 8PR | 102/100 | R | 1700 | 3200 |
| 195R 14 C | 8PR | 106/104 | R | 1900 | 3600 |
| 195/70R 15 C | 8PR | 104/102 | R | 1800 | 3400 |
| 205/70R 15 C | 8PR | 106/104 | R | 1900 | 3600 |
| 215/70R 15 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/70R 15 C | 8PR | 112/110 | R | 2240 | 4240 |
| 205/65R 15 C | 8PR | 102/100 | T | 1700 | 3200 |
| 185/75R 16 C | 8PR | 104/102 | R | 1800 | 3400 |
| 195/75R 16 C | 8PR | 107/105 | R | 1950 | 3700 |
| 205/75R 16 C | 8PR | 110/108 | R | 2120 | 4000 |
| 215/75R 16 C | 8PR | 113/111 | R | 2300 | 4360 |
| 225/75R 16 C | 8PR | 118/116 | R | 2640 | 5000 |
| 205/65R 16 C | 8PR | 107/105 | T | 1950 | 3700 |
| 215/65R 16 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/65R 16 C | 8PR | 112/110 | R | 2240 | 4240 |
| 235/65R 16 C | 8PR | 115/113 | R | 2430 | 4600 |



Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.

| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 190 | 54 | 6½J | 6J, 7J | 218 | 660 | C | A | 71 | 2 |
| 170 | 65 | 6½J | 6J, 7J | 227 | 694 | C | A | 72 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 201 | 645 | E | A | 71 | 2 |
| 140 | 76 | 8½J | 8J, 9J | 298 | 777 | C | A | 72 | 2 |
| 170 | 83 | 7J | 6½J, 7½J | 240 | 716 | C | A | 72 | 2 |
| 170 | 69 | 7J | 6½J, 7½J | 240 | 716 | C | A | 72 | 2 |
| 190 | 69 | 6½J | 6J, 7J | 218 | 682 | C | A | 71 | 2 |
| 190 | 69 | 6J | 5½J, 6½J | 205 | 674 | C | A | 71 | 2 |
| 190 | 69 | 6J | 5½J | 201 | 660 | E | A | 71 | 2 |
| 170 | 76 | 6J | 5½J, 6½J, 7J | 213 | 723 | C | A | 71 | 2 |
| 170 | 69 | 6J | 5½J, 6½J, 7J | 216 | 728 | C | A | 71 | 2 |
| 170 | 69 | 5½J | 6J, 6½J | 201 | 709 | C | A | 71 | 2 |



| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 140 | 65 | 4½J | 4,00B, 4,50B, 4J, 5J | 157 | 550 | F | C | 71 | 2 |
| 140 | 65 | 4½J | 4,00B, 4,50B, 4J, 5,00B, 5J | 157 | 578 | F | C | 71 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 188 | 650 | F | B | 71 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 198 | 666 | F | A | 71 | 2 |
| 170 | 65 | 6J | 5J, 5½J | 201 | 655 | F | A | 71 | 2 |
| 170 | 65 | 6J | 5½J, 6½J | 209 | 669 | F | A | 71 | 2 |
| 170 | 65 | 6½J | 5½J, 6J, 7J | 221 | 683 | F | A | 71 | 2 |
| 170 | 65 | 6½J | 6J, 7J | 228 | 697 | F | A | 71 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 209 | 647 | E | A | 71 | 2 |
| 170 | 69 | 5J | 5½J, 6J | 184 | 685 | F | B | 71 | 2 |
| 170 | 69 | 5½J | 5j, 6J | 196 | 699 | F | A | 71 | 2 |
| 170 | 69 | 5½J | 6J, 6½J | 203 | 715 | F | A | 71 | 2 |
| 170 | 69 | 6J | 5½J, 6½J, 7J | 216 | 729 | F | A | 71 | 2 |
| 170 | 76 | 6J | 6½J, 7J | 223 | 744 | F | A | 71 | 2 |
| 190 | 69 | 6J | 5½J, 6½J | 209 | 673 | E | A | 71 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 221 | 686 | F | A | 71 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 228 | 699 | F | A | 71 | 2 |
| 170 | 69 | 7J | 6½J, 7½J | 240 | 712 | F | A | 71 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

## PT 925 FULL GRIP

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 155R 12 C | 8PR | 88/86 | N | 1120 | 2120 |
| 155R 13 C | 6PR | 85/83 | N | 1030 | 1948 |
| 185R 14 C | 8PR | 102/100 | R | 1700 | 3200 |
| 195R 14 C | 8PR | 106/104 | R | 1900 | 3600 |
| 195/70R 15 C | 8PR | 104/102 | R | 1800 | 3400 |
| 205/70R 15 C | 8PR | 106/104 | R | 1900 | 3600 |
| 215/70R 15 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/70R 15 C | 8PR | 112/110 | R | 2240 | 4240 |
| 205/65R 15 C | 8PR | 102/100 | T | 1700 | 3200 |
| 175/75R 16 C | 8PR | 101/99 | R | 1650 | 3100 |
| 185/75R 16 C | 8PR | 104/102 | R | 1800 | 3400 |
| 195/75R 16 C | 8PR | 107/105 | R | 1950 | 3700 |
| 205/75R 16 C | 8PR | 110/108 | R | 2120 | 4000 |
| 215/75R 16 C | 8PR | 113/111 | R | 2300 | 4360 |
| 225/75R 16 C | 8PR | 118/116 | R | 2640 | 5000 |
| 205/65R 16 C | 8PR | 107/105 | T | 1950 | 3700 |
| 215/65R 16 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/65R 16 C | 8PR | 112/110 | R | 2240 | 4240 |
| 235/65R 16 C | 8PR | 115/113 | R | 2430 | 4600 |
| 195/60R 16 C | 6PR | 99/97 | T | 1550 | 2920 |

## PT 935 FULL GRIP

| TIRE SIZE | PR | LOAD INDEX | SPEED INDEX | LOAD CAPACITY (kg) 2 WHEELED MAXIMUM LOAD PER AXLE (kg) | LOAD CAPACITY (kg) 4 WHEELED MAXIMUM LOAD PER AXLE(kg) |
|---|---|---|---|---|---|
| 155R 12 C | 8PR | 88/86 | N | 1120 | 2120 |
| 155R 13 C | 6PR | 85/83 | N | 1030 | 1948 |
| 185R 14 C | 8PR | 102/100 | R | 1700 | 3200 |
| 195R 14 C | 8PR | 106/104 | R | 1900 | 3600 |
| 195/70R 15 C | 8PR | 104/102 | R | 1800 | 3400 |
| 205/70R 15 C | 8PR | 106/104 | R | 1900 | 3600 |
| 225/70R 15 C | 8PR | 112/110 | R | 2240 | 4240 |
| 215/65R 15 C | 6PR | 104/102 | T | 1800 | 3400 |
| 185/75R 16 C | 8PR | 104/102 | R | 1800 | 3400 |
| 195/75R 16 C | 8PR | 107/105 | R | 1950 | 3700 |
| 205/75R 16 C | 10PR | 113/111 | R | 2300 | 4360 |
| 215/75R 16 C | 10PR | 116/114 | R | 2500 | 4720 |
| 225/75R 16 C | 8PR | 118/116 | R | 2640 | 5000 |
| 195/65R 16 C | 8PR | 104/102 | T | 1800 | 3400 |
| 205/65R 16 C | 8PR | 107/105 | T | 1950 | 3700 |
| 215/65R 16 C | 8PR | 109/107 | R | 2060 | 3900 |
| 225/65R 16 C | 8PR | 112/110 | R | 2240 | 4240 |
| 235/65R 16 C | 12PR | 121/119 | R | 2900 | 5440 |
| 285/65R 16 C | 10PR | 128 | N | 3600 | - |
| 195/60R 16 C | 6PR | 99/97 | T | 1550 | 2920 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 140 | 65 | 4½J | 4,00B, 4,50B, 4J, 5J | 157 | 551 | G | C | 71 | 2 |
| 140 | 51 | 4½J | 4,00B, 4,50B, 4J, 5,00B, 5J | 157 | 578 | G | C | 71 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 188 | 650 | G | B | 71 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 198 | 670 | G | B | 73 | 2 |
| 170 | 65 | 6J | 5J, 5½J | 201 | 655 | G | B | 73 | 2 |
| 170 | 65 | 6J | 5½J, 6½J | 209 | 669 | F | B | 73 | 2 |
| 170 | 65 | 6½J | 5½J, 6J, 7J | 221 | 683 | F | B | 73 | 2 |
| 170 | 65 | 6½J | 6J, 7J | 228 | 697 | F | B | 72 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 209 | 647 | F | B | 73 | 2 |
| 170 | 69 | 5J | 4 ½ J, 5½J, | 172 | 672 | G | B | 73 | 2 |
| 170 | 69 | 5J | 5½J, 6J | 180 | 692 | G | B | 73 | 2 |
| 170 | 69 | 5½J | 5j, 6J | 196 | 708 | G | B | 73 | 2 |
| 170 | 69 | 5½J | 6J, 6½J | 203 | 718 | F | B | 73 | 2 |
| 170 | 69 | 6J | 5½J, 6½J, 7J | 216 | 734 | F | B | 73 | 2 |
| 170 | 76 | 6J | 6½J, 7J | 223 | 744 | F | B | 73 | 2 |
| 190 | 69 | 6J | 5½J, 6½J | 209 | 672 | F | B | 73 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 221 | 687 | F | B | 73 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 228 | 699 | F | B | 73 | 2 |
| 170 | 69 | 7J | 6½J, 7½J | 240 | 712 | F | B | 73 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 201 | 640 | G | B | 73 | 2 |



| | | RIM | | INFLATED DIMENSION | | EU TIRE LABEL | | | |
|---|---|---|---|---|---|---|---|---|---|
| SPEED LIMIT(km/h) | INFLATED PRESSURE(Psi/Bar) | RECOM (inch) | PERMITTED (inch) | SECTION WIDTH (mm) | OUTER DIAMETER (mm) | | | DB | |
| 140 | 65 | 4½J | 4,00B, 4,50B, 4J, 5J | 154 | 550 | F | B | 73 | 2 |
| 140 | 51 | 4½J | 4,00B, 4,50B, 4J,5,00B,5J | 157 | 578 | F | B | 73 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 188 | 650 | G | B | 73 | 2 |
| 170 | 65 | 5½J | 5J, 6J | 198 | 666 | F | B | 73 | 2 |
| 170 | 65 | 6J | 5J, 5½J | 198 | 661 | F | B | 73 | 2 |
| 170 | 65 | 6J | 5½J, 6½J | 221 | 673 | F | B | 73 | 2 |
| 170 | 65 | 6½J | 6J, 7J | 222 | 698 | F | B | 73 | 2 |
| 190 | 54 | 6½J | 6J, 7J | 211 | 660 | F | A | 73 | 2 |
| 170 | 69 | 5J | 5½J, 6J | 184 | 684 | G | B | 73 | 2 |
| 170 | 69 | 5½J | 5j, 6J | 196 | 698 | F | B | 73 | 2 |
| 170 | 76 | 5½J | 6J, 6½J | 203 | 711 | F | B | 73 | 2 |
| 170 | 76 | 6J | 5½J, 6½J, 7J | 216 | 728 | F | B | 73 | 2 |
| 170 | 76 | 6J | 6½J, 7J | 225 | 747 | F | B | 73 | 2 |
| 190 | 69 | 6J | 5½J | 201 | 660 | G | B | 73 | 2 |
| 190 | 69 | 6J | 5½J, 6½J | 200 | 677 | F | B | 73 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 215 | 690 | F | B | 73 | 2 |
| 170 | 69 | 6½J | 6J, 7J | 228 | 698 | F | B | 73 | 2 |
| 170 | 80 | 7J | 6½J, 7½J | 238 | 716 | F | B | 73 | 2 |
| 140 | 76 | 8½J | 8J, 9J | 297 | 778 | F | A | 75 | 2 |
| 190 | 54 | 6J | 5½J, 6½J | 201 | 640 | F | B | 73 | 2 |

Description
*For load capacity on various speeds, and inflation figures,please consult your sales representative.
*Load capacity on standard speed and weight.
*Out company is entitled to make any change on any information in this catalogue , without further notice.
*This catalogue annuls all the previous catalogues.
*All figures are for reference; our company is not responsible for printing errors.



petlas

Petlas Passenger, Light Truck and 4x4 Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering pe RFect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long termR elationships with our customers by providing excellent service, quality and delivering our promises.






petlas
TRACK OF TRUST

2018 EDITION

*DISTRIBUTED BY*

petlas


**Headquarters - Factory**
Petlas Tire Industry and Trade
Kındam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

**Int. Sales & Marketing**
Petlas Tire Industry and Trade
Kazım Karabekir Cd. Özcan Plaza
No: 124 06050 Ankara / TURKEY
T: +90 312 309 30 30 • F: +90 312 310 95 09

**Petlas Tire USA**
1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.petlas.com


**MADE IN TURKEY**