


ARAMID BELTED


TA130 AGROPER

R-1W Harvester tire with **Aramid Belted** structure.

- Aramid belt technology provides extra protection against stubble damage and ground impacts compared to steel and fabric alternatives

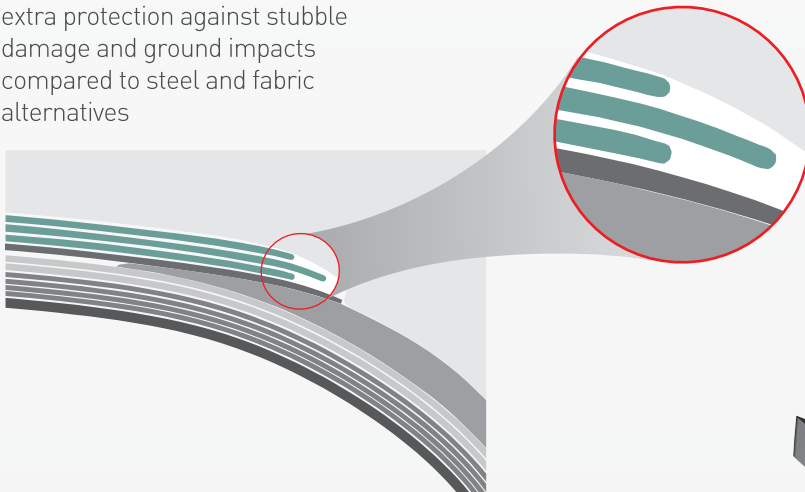

- Reinforced bead structure increases tire endurance, provides long life.

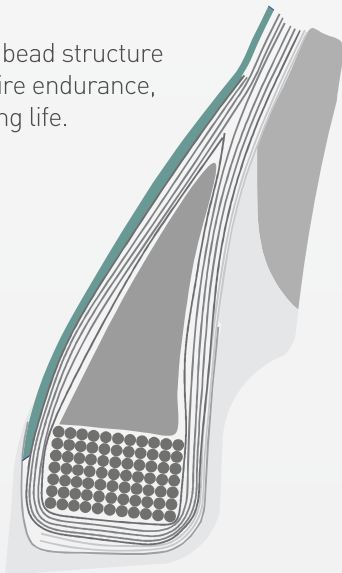

Innovative construction

- Special tread design enables exceptional traction and better handling on the field, as well as tillage operations.



LOAD CAPACITY

Perfect performance under heavy loads and high traction with its extra reinforced carcass and bead.

LOW SOIL COMPACTION

Wider footprint and optimized lug angle minimize soil compaction, and crop damage.

TIRE STRUCTURE

- Elastic structure absorbs impacts, and yields better flotation.
- Special tread compound is resistant against punctures.

SIZES | 620/75R 26 • 620/75R 30 • 650/75R 32 • 800/65R 32



HARVESTER TIRE

ARAMID BELTED

TA130 AGROPER

TIRE SIZE	TT / TL	SPEED/ LOAD INDEX	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		INFLATION PRESSURE psi / bar	LOAD CAPACITY (kg)			
			RECOMMENDED (inch)	PERMITTED (inch)	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	STATIC LOADED RADIUS (mm)	DYNAMIC ROLLING CIRCUMFERENCE (mm)		10 km/h	30 km/h	40 km/h	50 km/h
620/75R 26	TL	166 A8/163B	DW20B	-	1590	645	703	4739	17 / 1,2	4195	3345	3125	2845
									20 / 1,4	4690	3745	3500	3185
									23 / 1,6	5115	4085	3815	3475
									26 / 1,8	5325	4255	3975	3615
									29 / 2,0	5610	4485	4190	3815
									32 / 2,2	5825	4655	4345	3955
									35 / 2,4	6035	4825	4505	4100
									38 / 2,6	6320	5045	4715	4290
									41 / 2,8	6605	5275	4930	4490
									44 / 3,0	6820	5445	5090	4635
								46 / 3,2	7100	5670	5300	4825	
620/75R 30	TL	163 A8/160B	DW20B	-	1692	645	743	5030	17 / 1,2	4180	3340	3120	2885
									20 / 1,4	4640	3705	3465	3200
									23 / 1,6	5100	4070	3805	3515
									26 / 1,8	5360	4275	4000	3695
									29 / 2,0	5620	4485	4195	3875
									32 / 2,2	5780	4615	4315	3985
									35 / 2,4	5945	4745	4440	4100
									38 / 2,6	6205	4960	4630	4280
									41 / 2,8	6530	5215	4875	4500
									650/75R 32	TL	172 A8/172B	DW21B	DW20B DW23B
									20 / 1,4	4690	3745	3500	3500
									23 / 1,6	5115	4085	3820	3820
									26 / 1,8	5330	4255	3975	3975
									29 / 2,0	5615	4485	4190	4190
									32 / 2,2	5825	4655	4350	4350
									35 / 2,4	6040	4825	4505	4505
									38 / 2,6	6325	5050	4720	4720
									41 / 2,8	6605	5275	4930	4930
									44 / 3,0	6820	5445	5090	5090
									46 / 3,2	8445	6745	6300	6300
800/65R 32	TL	178 A8 / 178 B	DW27B	DW25B DH27B	1853	798	823	5559	17 / 1,2	4195	3350	3130	3130
									20 / 1,4	4690	3745	3500	3500
									23 / 1,6	5115	4085	3820	3820
									26 / 1,8	5330	4255	3975	3975
									29 / 2,0	5615	4485	4190	4190
									32 / 2,2	5825	4655	4350	4350
									35 / 2,4	6040	4825	4505	4505
									38 / 2,6	6325	5050	4720	4720
									41 / 2,8	6605	5275	4930	4930
									44 / 3,0	6820	5445	5090	5090
									46 / 3,2	10050	8025	7500	7500

* Load capacity on recommended speed and pressure is stated with dark colour.