

petlas



**PCR-4X4-LTR- WINTER
TIRES**

petlas
TRACK OF TRUST

CONTENTS

2 Range of Petlas Tires

4 Petlas Tires by Size

Passenger Tires
4x4 Tires
LTR Tires

8 General Information

Sidewall Markings
Radial Tire Construction
Important Definitions Related
Dimensions
Speed Index Table
Load Index Table

62 Technical Table

PCR Tires
4x4 Tires
LTR Tires

Passenger Tires

PT311	PT515	PT525	PT535	PT711	PT721	PT731	PT741	W601	W651
16	18	20	22	24	26	28	30	34	36

SUV, 4X4 Tires

PT411	PT421	PT431	W671
40	42	44	46

LTR Tires

PT825	PT825 plus	PT835	PT875	PT925	PT935
50	52	54	56	58	60

petlas
TRACK OF TRUST

RANGE OF PETLAS TIRES

Passenger Tires



PT311 ELEGANT



PT721 VELOX SPORT



PT515 IMPERIUM



PT731 VELOX SPORT



PT525 PROGREEN



PT741 VELOX SPORT



PT535 IMPERIUM



W601 SNOW MASTER



PT711 VELOX SPORT



W651 SNOW MASTER

SUV, 4X4 Tires



PT411A/S EXPLERO



PT421A/S EXPLERO



PT431H/T EXPLERO



W671 EXPLERO

LTR Tires



PT825 FULL POWER



PT825 FULL POWER Plus



PT835 FULL POWER



PT875 ADVENTE



PT925 FULL GRIP



PT935 FULL GRIP

PT 311 Elegant

155/80 R12
 155/80 R13
 165/80 R13
 165/80 R13 RF
 175/80 R14
 165/80 R15
 145/70 R12
 155/70 R12
 165/70 R12
 175/70 R12
 145/70 R13
 155/70 R13
 165/70 R13
 165/70 R13 RF
 175/70 R13
 185/70 R13
 165/70 R14
 165/70 R14 RF
 175/70 R14
 175/70 R14 RF
 185/70 R14
 195/70 R14
 195/70 R15 RF
 155/65 R13
 165/65 R13
 175/65 R13
 155/65 R14
 165/65 R14
 175/65 R14
 175/65 R14 RF
 185/65 R14
 195/65 R14
 175/65 R15
 185/65 R15
 195/65 R15
 195/65 R15 RF
 165/60 R14

PT 515 Imperium

175/70 R13
 175/70 R14
 175/70 R14 RF
 185/70 R14
 175/65 R14
 175/65 R14 RF
 185/65 R14
 175/65 R15
 185/65 R15 RF
 195/65 R15
 195/65 R15 RF
 205/65 R15
 205/65 R15 RF
 215/65 R15
 205/65 R16
 215/65 R16
 185/60 R14
 195/60 R14
 185/60 R15
 185/60 R15 RF
 195/60 R15
 205/60 R15
 205/60 R16
 185/55 R15
 195/55 R15
 205/55 R15
 195/55 R16
 205/55 R16
 215/55 R16
 215/55 R16
 225/55 ZR16
 225/55 ZR17
 195/50 R15
 205/50 R15
 205/50 ZR16
 205/50 ZR17 RF
 225/50 ZR17 RF
 215/45 ZR17 RF
 225/45 ZR17 RF

PT 525 Progreen

175/70 R14
 175/70 R14 RF
 185/70 R14
 175/65 R14
 175/65 R14 RF
 185/65 R14
 185/65 R15 RF
 195/65 R15
 195/65 R15 RF
 205/65 R15
 185/60 R14
 185/60 R15
 185/60 R15 RF
 195/60 R15
 205/60 R16
 215/60 R16
 185/55 R14
 185/55 R15
 195/55 R15
 195/55 R16
 205/55 R16
 195/50 R15
 195/50 R16 RF



PT 535 Imperium

175/70 R14
 175/65 R14
 185/65 R14
 185/65 R15
 185/65 R15 RF
 195/65 R15
 195/65 R15 RF
 185/60 R15
 185/60 R15 RF
 195/60 R15
 205/55 R16
 195/55 R16
 195/50 R16



PT 711 Velox Sport

185/60 R13
185/55 R14
185/55 R15
195/55 R15
205/55 R15
195/55 R16
205/55 R16
205/55 ZR16 RF
215/55 ZR16 RF
225/55 R16
225/55 ZR17
195/50 R15
195/50 R16
205/50 ZR15
205/50 ZR16 RF
225/50 ZR16 RF
205/50 ZR17 RF
215/50 ZR17
225/50 ZR17 RF
195/45 R14
195/45 R15
205/45 R15
195/45 R16
205/45 ZR16 RF
205/45 ZR17 RF
215/45 ZR17 RF
225/45 ZR17 RF
245/45 ZR17 RF
225/45 ZR18 RF
245/45 ZR18 RF
205/40 ZR16 RF
215/40 ZR16 RF
225/40 ZR16
205/40 ZR17 RF
215/40 ZR17 RF
235/40 ZR17 RF
245/40 ZR17 RF
215/40 ZR18 RF
225/40 ZR18 RF
235/40 ZR18 RF
245/40 ZR18
225/40 ZR19
245/40 ZR19 RF
255/40 ZR19 RF
215/35 ZR18 RF
225/35 ZR18 RF
245/35 ZR18 RF
255/35 ZR18 RF
265/35 ZR18 RF
275/35 ZR18 RF
225/35 ZR19 RF
235/35 ZR19 RF
245/35 ZR19 RF
255/40 ZR19*
215/35 ZR18*
265/35 ZR18*
275/35 ZR18*



PT 721 Velox Sport

205/55 R16



PT 731 Velox Sport

205/55 R16
205/55 R16



PT 741 Velox Sport

215/60 R16 RF
225/60 R16
235/60 ZR16
185/55 R14
185/55 R15
195/55 R15
185/55 R16 RF
195/55 R16
195/55 RF16 RFT
205/55 ZR16 RF
205/55 RF16 RFT
215/55 ZR16 RF
225/55 ZR16 RF
205/55 ZR17
215/55 ZR17 RF
225/55 ZR17 RF
225/55 ZR17 RFT
235/55 ZR17 RF
195/50 R15
195/50 R16
205/50 ZR15
205/50 ZR16 RF
225/50 ZR16 RF
205/50 ZR17 RF
205/50 ZR17 RFT
215/50 ZR17 RF
225/50 ZR17 RF
225/50 ZR17 RFT
235/50 ZR18 RF
245/50 ZR18
245/50 RF18 RFT
195/45 R16
205/45 ZR16 RF
215/45 R16 RF
205/45 ZR17 RF
215/45 ZR17 RF
225/45 ZR17 RF
225/45 RF17 RFT
235/45 ZR17 RF
245/45 ZR17 RF
215/45 ZR18 RF
225/45 ZR18 RF
225/45 RF18 RFT
235/45 ZR18 RF
245/45 ZR18 RF
245/45 ZR18 RFT
255/45 ZR18 RF
225/45 ZR19 RF
245/45 ZR19 RF
245/45 ZR19 RFT
255/45 ZR19 RF
205/40 ZR16 RF
205/40 ZR17 RF
215/40 ZR16 RF
215/40 ZR17 RF
235/40 ZR17 RF
245/40 ZR17 RF
215/40 ZR18 RF
225/40 ZR18 RF
235/40 ZR18 RF
245/40 ZR18
225/40 ZR19
245/40 ZR19 RF
255/40 ZR19 RF
215/35 ZR18 RF
225/35 ZR18 RF
245/35 ZR18 RF
255/35 ZR18 RF
265/35 ZR18 RF
275/35 ZR18 RF
225/35 ZR19 RF
235/35 ZR19 RF
245/35 ZR19 RF
255/40 ZR19*
215/35 ZR18*
265/35 ZR18*
275/35 ZR18*

215/40 ZR17 RF
235/40 ZR17 RF
245/40 ZR17 RF
215/40 ZR18 RF
225/40 ZR18 RF
235/40 ZR18 RF
245/40 ZR18
245/40 ZR18 RFT
255/40 ZR18
225/40 ZR19 RF
245/40 ZR19 RF
245/40 ZR19 RFT
255/40 ZR19 RF
245/35 ZR17
215/35 ZR18 RF
225/35 ZR18 RF
245/35 ZR18 RF
255/35 ZR18 RF
265/35 ZR18 RF
275/35 ZR18 RF
215/35 ZR19 RF
225/35 ZR19 RF
235/35 ZR19 RF
245/35 ZR19 RF
255/35 ZR19 RF
255/35 ZR19 RFT
275/35 ZR19 RF
245/35 ZR20 RF
255/35 ZR20 RF
235/55 R18*
275/45 R18 RFT*
235/45 R19*
255/45 R19*
275/45 R18*
215/40 R18 RFT*
225/40 R18 RFT*
225/40 R19 RFT*
245/40 R20*
245/40 R20 RFT*
255/40 R18*
255/40 R18 RFT*
255/40 R20*
265/40 R18*
265/40 R19*
275/40 R18*
275/40 R18 RFT*
275/40 R19*
285/40 R19*
205/35 R18*
225/35 R19*
225/35 R19 RFT*
225/35 R20*
225/35 R20 RFT*
245/35 R18 RFT*

245/35 R19 RFT*
245/35 R20 RFT*
255/35 R18 RFT*
265/35 R19*
265/35 R20*
275/35 R18 RFT*
275/35 R19 RFT*
275/35 R20*
275/35 R20 RFT*
285/35 R19*
285/35 R18*
285/35 R18 RFT*
285/35 R19 RFT*
295/35 R18*
295/35 R19*
295/35 R20*
225/30 R20*
235/30 R20*
245/30 R19*
245/30 R19 RFT*
245/30 R20*
255/30 R19*
255/30 R19 RFT*
255/30 R20*
255/30 R20 RFT*
265/30 R19*
265/30 R20*
275/30 R19*

RF REINFORCED
RFT RUNFLAT
* UNDER DEVELOPMENT

petias

W 601 Snow Master

155/80 R13
 165/80 R13
 175/80 R14
 145/70 R13
 155/70 R13
 165/70 R13
 165/70 R13 RF
 175/70 R13
 185/70 R13
 165/70 R14
 165/70 R14 RF
 175/70 R14
 175/70 R14 RF
 185/70 R14
 195/70 R14
 195/70 R15 RF
 155/65 R13
 165/65 R13
 175/65 R13
 155/65 R14
 165/65 R14
 175/65 R14
 175/65 R14 RF
 185/65 R14
 175/65 R15
 165/60 R14

W 651 Snow Master

185/65 R15
 185/65 R15 RF
 195/65 R15
 195/65 R15 RF
 205/65 R15
 215/65 R15
 205/65 R16
 215/65 R16
 215/65 R16 RF
 185/60 R14
 195/60 R14
 185/60 R15
 195/60 R15
 205/60 R15
 205/60 R16
 215/60 R16
 225/60 R16
 235/60 R16
 185/55 R14
 185/55 R15
 185/55 R16 RF
 195/55 R15
 195/55 R16
 205/55 R15
 205/55 R15 RF
 205/55 R16
 205/55 RF16 RFT
 205/55 R17
 215/55 R16
 225/55 R16
 215/55 R17 RF
 225/55 R17
 225/55 R17 RF
 235/55 R17 RF
 195/50 R15
 205/50 R15
 195/50 R16
 205/50 R16
 205/50 R16 RF
 225/50 R16 RF
 205/50 R17 RF
 215/50 R17
 225/50 R17 RF
 235/50 R19 RF
 245/50 R18 RF
 195/45 R16 RF
 205/45 R16 RF

PT 411 A/S Explero

235/75 R15
 205/70 R15
 215/70 R15
 215/70 R16
 225/70 R16 RF
 235/70 R16
 245/70 R16
 265/70 R16
 255/70 R16
 215/65 R16
 215/65 R16 RF
 215/65 R17
 225/65 R17
 235/65 R17 RF
 245/65 R17 RF
 255/65 R16
 255/65 R17
 265/65 R17
 215/60 R16
 225/60 R17 RF
 235/60 R16




PT 421 A/T Explero

205/80 R16 RF
 215/80 R15
 235/75 R15
 235/70 R16
 255/70 R15
 265/70 R15 RF
 245/70 R16 RF
 215/65 R16
 265/60 R18 RF

PT 431 H/T Explero

235/65 R17 RF
 215/60 R17
 225/60 R18
 235/60 R17
 235/60 R18 RF
 255/60 R17
 255/60 R18 RF
 265/60 R18
 215/55 R18
 225/55 R19
 225/55 R18
 225/55 R17
 235/55 R17 RF
 235/55 R18
 235/55 R19 RF
 245/55 R19
 255/55 R18 RF
 255/55 R19 RF
 275/55 R19
 235/50 R18 RF
 255/50 R19 RF
 255/50 ZR19 RF RFT
 265/50 ZR19 RF
 275/45 ZR19 RF
 275/45 ZR20 RF
 285/45 R19
 275/40 ZR20
 315/35 ZR20 RF*
 315/35 ZR20 RF RFT*



W671 Explero

205/80 R16 RF
215/80 R15
235/75 R15 RF
205/70 R15
215/70 R15
215/70 R16 RF
225/70 R16 RF
235/70 R16
245/70 R16 RF
255/70 R16
265/70 R16
215/65 R17
225/65 R17 RF
235/65 R17 RF
245/65 R17 RF
255/65 R17 RF
265/65 R17 RF
215/60 R17 RF
225/60 R17 RF
235/60 R17 RF
255/60 R17 RF
225/60 R18 RF
235/60 R18 RF
245/60 R18 RF
255/60 R18 RF
235/55 R17 RF
265/60 R18 RF
215/55 R18
225/55 R18 RF
235/55 R18 RF
255/55 R18 RF
225/55 R19
235/55 R19 RF
245/55 R19
255/55 R19 RF
275/55 R19
235/50 R18 RF
235/50 R19 RF
255/50 R19 RF
255/50 RF19 RF RFT
265/50 R20 RF
245/50 R20
225/45 R19 RF
275/45 R20 RF
285/45 R19 RF
275/40 R20 RF
315/35 R20 RF
255/55 R18 RFT*
275/40 R20 RFT*



PT 825 Full Power

195 R14 C
195 R15 C
225/70 R15 C



PT 825 Full Power Plus

5.00 R12C
155 R12 C
155 R13 C
185 R14 C
195 R14 C
185 R15 C
175/75 R16 C
185/75 R16 C
205/75 R16 C
215/75 R16 C
215/75 R16 C
165/70 R14 C
195/70 R15 C
205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
215/65 R16 C
225/65 R16 C
235/65 R16 C



PT 835 Full Power

205/75 R16 C
215/75 R16 C
225/70 R15 C
195/65 R16 C
205/65 R16 C
215/65 R15 C
215/65 R16 C
235/65 R16 C
285/65 R16 C
195/60 R16 C



PT 875 Advente

155 R12 C
155 R13 C
185 R14 C
195 R14 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
195/70 R15 C
205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C



PT 925 Full Grip

155 R12 C
155 R13 C
185 R14 C
195 R14 C
175/75 R16 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
195/70 R15 C
205/70 R15 C
215/70 R15 C
225/70 R15 C
205/65 R15 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C
195/60 R16 C



PT 935 Full Grip

155 R12
155 R13
185 R14 C
195 R14 C
185/75 R16 C
195/75 R16 C
205/75 R16 C
215/75 R16 C
225/75 R16 C
205/70 R15 C
225/70 R15 C
195/65 R16 C
205/65 R16 C
215/65 R16 C
225/65 R16 C
235/65 R16 C
285/65 R16 C
285/65 R16 C
195/60 R16 C



RF REINFORCED
RFT RUNFLAT
* UNDER DEVELOPMENT

petlas

There are certain markings on the sidewall of tires. You shall find these notices and properties below;

DOT Symbol:

Proves that tyre complies with DOT regulations.

European Commission of Economics Confirmation :

It is the legitimate proof that tires comply with all ECE directives and is represented by a common and unique confirmation number due to regulation.

Max. Load and Pressure Markings:

It is a necessary marking on sidewalls of tires which complies with DOT directives It consists of necessary information about max.load and pressure of tyres.

“European Commission of Economics” Tire Verification Symbol:

This symbol proves that the tyre complies with all necessary standards disclaimed by European Commission of Economics.

Construction Info:

It represents type of material used in sidewall and base in accordance with DOT regulation.

UTQG Quality Indicator:


- **Wear Life Indicator:** a tire when tested under standard conditions, wear life as 100 according to the test tire life indicates proportionate . Tire life usage patterns, climate and road conditions may change significantly depending on the service properties.
- **Traction Class Indicator:** Under controlled conditions demonstrated the ability to stand on the rubber surface is wet. Traction grades, from highest to lowest are AA, A, B and C.
- **Heat Resistance Indicator :** Tire's resistance to heat and shows the ability to throw heat.
Traction grades, from highest to lowest are AA, A, B and C.

Speed class and load index :

European ETRTO standards maximum load and maximum load the tire can be based on the maximum rate based on the mark is indicating.



- | | |
|----------------------------------|-----------------------------------|
| 1 – Brand Logo | 13 – Speed Index |
| 2 – Construction Information | 14 – Safety Warnings |
| 3 – Manufacturing Country | 15 – Outside |
| 4 – Max.Load and Pressure Rating | 16 – ECE approval number |
| 5 – Mold No | 17 – Max. Load Index |
| 6 – Construction Type | 18 – Tire Size |
| 7 – DOT Mark | 19 – Pattern Name |
| 8 – Factory Code | 20 – Temperature Resistance Index |
| 9 – Tubeless | 21 – Tire Road Grip Index |
| 10 – Product Code | 22 – Tire Wear Index Resistance |
| 11 – Date of Manufacture | 23 – UTQG RATING |
| 12 – ECE approval mark | |

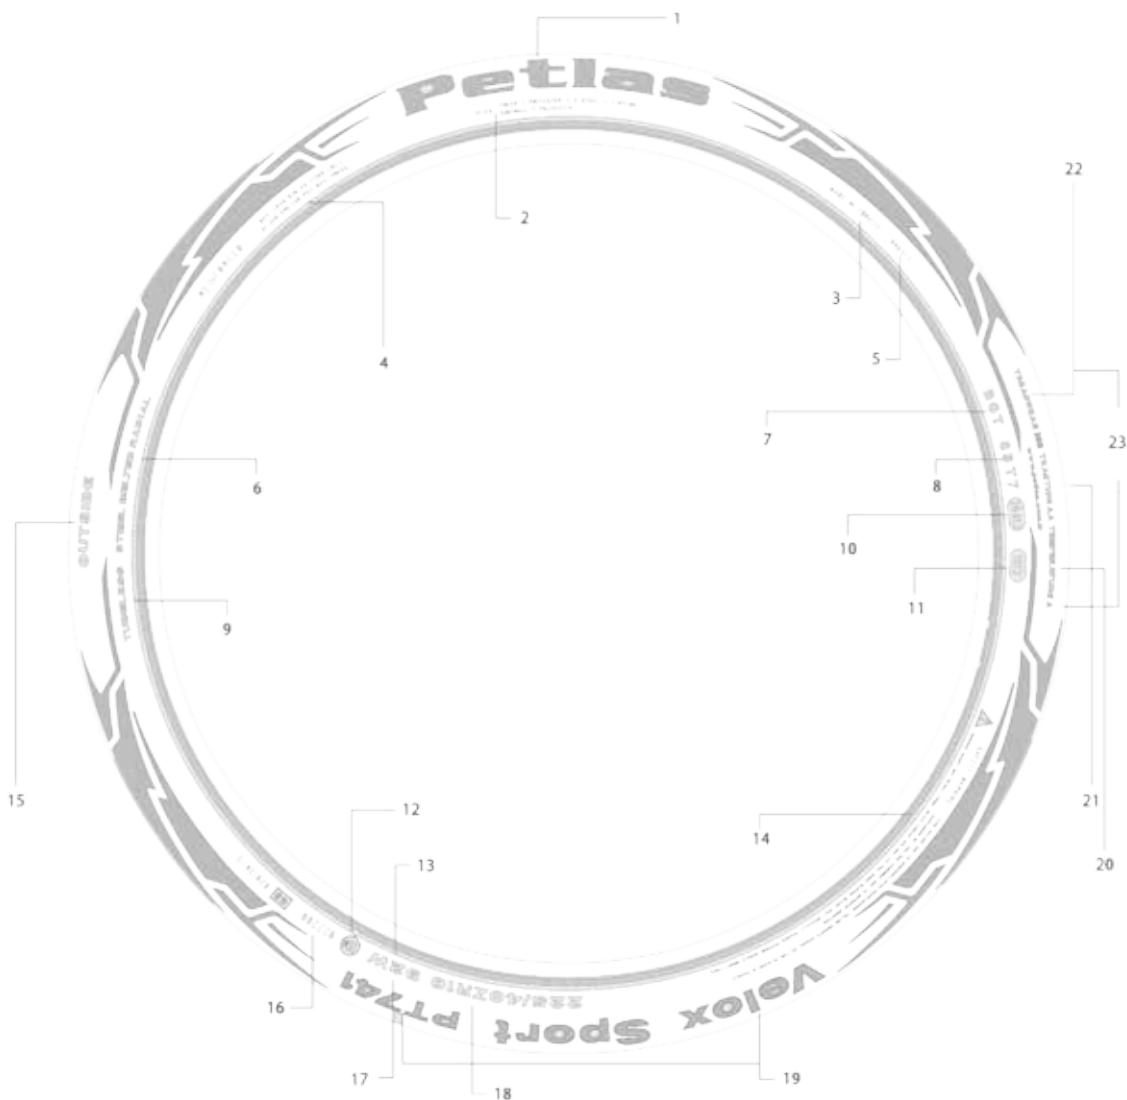

If you have its power behind you,
all the roads are yours.



www.petlas.com

petlas
TRACK OF TRUST

RADIAL TIRE CONSTRUCTION


IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standard inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.


EXAMPLE :

Tire size 225 / 40ZR18 92W

- Cross – section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no ; each producer's coding consisting of the production data
- Abrasion indicator (TWI)
- Usable in a tubeless way or with the tubetype usage
- U.S. Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

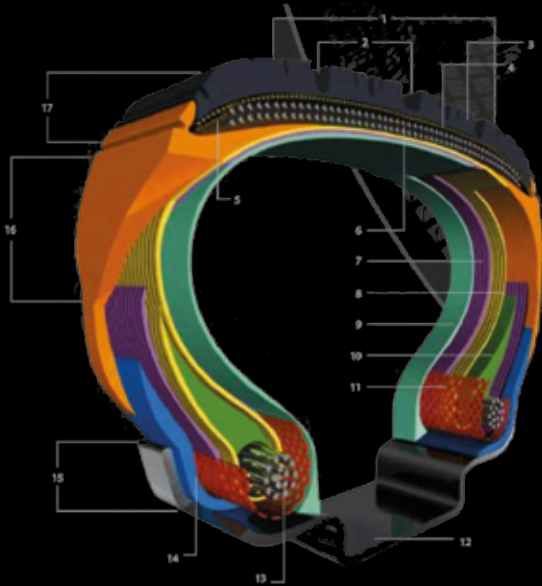

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Innerliner
10. Bead Filling
11. Bead Reinforcement fabric
12. Rim
13. Bead Wire
14. Rim Cushion
15. Rim Flange
16. Sidewall
17. Shoulder

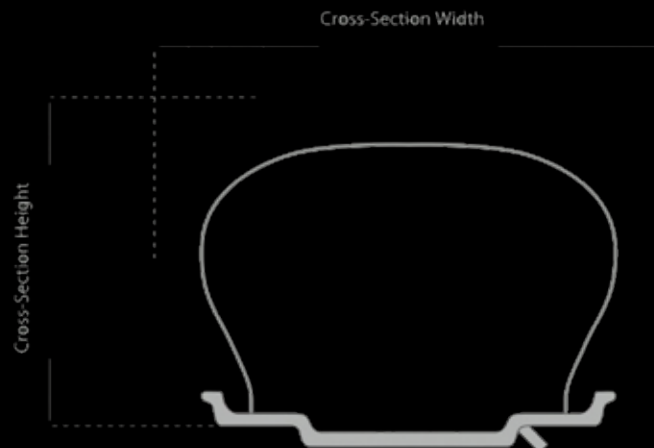

Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index
 (B) The weight a tyre can carry (kg)



PT 311



SUMMER



PT 515



SUMMER



PT 525



SUMMER



PT 535



SUMMER WINTER



PT 711



SUMMER





PASSENGER CAR TIRES

PT 721



SUMMER



PT 731



SUMMER



PT 741



SUMMER



W 601



WINTER



W 651



WINTER





PT 311 Elegant

Developed for performance and handling for the general use segment. Offer traction and riding comfort combining with durability.

PERFORMANCE AND HANDLING ON ANY ROAD

■ PATTERN PROPERTIES



■ Center rib on the tread center increases straight line performance with improving handling and braking performance.



■ Shoulder blocks offer exceptional cornering performance at high speed levels.



■ Deep grooves provide excellent discharge of water





■ ALL SIZES

PT 311 Elegant

155/80 R12	77T	145/70 R13	71T	185/70 R14	88T ●●	185/65 R14	86T ●●
155/80 R13	79T	155/70 R13	75T	195/70 R14	91T ●●	195/65 R14	89H ●●
165/80 R13	83T	165/70 R13	79T	195/70 R15 RF	97T ●●	175/65 R15	84T
165/80 R13 RF	87R	165/70 R13 RF	83T	155/65 R13	73T	185/65 R15	88T ●●
175/80 R14	88T	175/70 R13	82T	165/65 R13	77T	195/65 R15 RF	95T ●●
165/80 R15	87T	185/70 R13	86T ●●	175/65 R13	80T	195/65 R15	91T ●●
145/70 R12	69T	165/70 R14	81T	155/65 R14	75T	165/60 R14	75T
155/70 R12	73T	165/70 R14 RF	85R	165/65 R14	79T		
165/70 R12	77T	175/70 R14	84T	175/65 R14	82T		
175/70 R12	80T	175/70 R14 RF	88T	175/65 R14 RF	86T		

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.
High Tech Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.

petlas



PT 515 Imperium

Designed and produced with latest technology. It offers good braking performance in both wet and dry conditions, also good mileage.

GRIP THE ROAD SAFELY

■ PATTERN PROPERTIES



■ Plain block attached to the shoulder provides excellent handling and braking performance.



■ Increased number of tread blocks enables efficient discharge of water.



■ Shoulder blocks offer high cornering performance at high speeds.



■ Inner and outer lateral channels minimize noise and enable smooth and silent drive.



■ Grooves provide excellent water discharge.





■ ALL SIZES

PT 515 Imperium

175/70 R13	82H	195/65 R15	91V	185/60 R14	82H	185/55 R15	82V	195/50 R15	82V
175/70 R14	84H	195/65 R15	91H	195/60 R14	86H	195/55 R15	85V	205/50 R15	86V
175/70 R14 RF	88H	195/65 R15 RF	95H	185/60 R15	84H	205/55 R15	88V	205/50 ZR16	87W
185/70 R14	88H	205/65 R15	94H	185/60 R15 RF	88H	195/55 R16	87V	205/50 ZR17 RF	93W
175/65 R14	82H	205/65 R15	94V	195/60 R15	88H	205/55 R16	91H	225/50 ZR17 RF	98W
175/65 R14 RF	86T	205/65 R15 RF	99H	195/60 R15	88V	205/55 R16	91V	215/45 ZR17 RF	91W
185/65 R14	86H	215/65 R15	96V	205/60 R15	91H	215/55 R16	93H	225/45 ZR17 RF	94W
175/65 R15	84H	205/65 R16	95H	205/60 R15	91V	215/55 R16	93V		
185/65 R15	88H	215/65 R16	98H	205/60 R16	92H	225/55 ZR16	95W		
185/65 R15 RF	92H	215/65 R16	98V	205/60 R16	92V	225/55 ZR17	97W		

RF: REINFORCED
*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption
High Tech Construction	Jointless "0" degree spiral nylon cover and wide steel belts	High driving safety, comfort and durability.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 525 Progreen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance

ECOLOGICALLY FRIENDLY FUEL SAVING PERFORMANCE

■ PATTERN PROPERTIES



■ Thanks to its asymmetrical pattern design enables high performance on both and dry conditions.



■ Low rolling resistance by specially developed tread compound.



■ Special tread blocks minimize road noise.



■ Three grooves offer fast and effective discharge of water.





■ ALL SIZES

175/70 R14	84T	195/65 R15	91H	215/60 R16	95V
175/70 R14 RF	88T	195/65 R15	91V	185/55 R14	80H
185/70 R14	88T	195/65 R15 RF	95T	185/55 R15	82V
175/65 R14	82T	205/65 R15	94H	195/55 R15	85H
175/65 R14 RF	86T	185/60 R14	82H	195/55 R16	87H
185/65 R14	86T	185/60 R15	84H	205/55 R16	91H
185/65 R15	88T	185/60 R15 RF	88H	195/50 R15	82H
185/65 R15	88H	195/60 R15	88H	195/50 R16 RF	88V
185/65 R15 RF	92H	205/60 R16	92H		
195/65 R15	91T	205/60 R16	92V		

RF: REINFORCED

PT 525 Progreen



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improve uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 535 Imperium

All season car tire which combines high performance on wet and dry conditions. Offer very good riding comfort and high mileage.

EXCEPTIONAL ALL SEASON PERFORMANCE

■ PATTERN PROPERTIES



■ Center rib on the center enables handling and braking performance.



■ Efficient grip and traction thanks to its block design.



■ Specially designed tread compound reduce noise and provide driving comfort.



■ Four grooves offer fast and effective discharge of water.





■ ALL SIZES

PT 535 Imperium

175/70 R14	84H	185/60 R15	84H
175/65 R14	82H	185/60 R15 RF	88H
185/65 R14	86H	195/60 R15	88H
185/65 R15	88H	205/55 R16	91H
185/65 R15 RF	92H	195/55 R16	87H
195/65 R15	91H	195/50 R16	84H
195/65 R15 RF	95H		

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improve uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 711 Velox Sport

Designed and developed for ultra-high performance sport cars. Its aggressive pattern design and construction increase handling performance both wet and dry surfaces.

TURNS POWER INTO PERFORMANCE

■ PATTERN PROPERTIES



■ Aggressive pattern design.



■ Strong shoulder blocks offer exceptional cornering performance at high speeds.



■ V Shaped main grooves discharge water effectively on wet surfaces.





■ ALL SIZES

185/60 R13	80H	225/55 ZR17	97W	205/45 ZR16 RF	87W	235/40 ZR17 RF	94W	275/35 ZR18 RF	99W
185/60 R13	80V	195/50 R15	82V	205/45 ZR17 RF	88W	215/40 ZR18 RF	89W	225/35 ZR19 RF	88W
185/55 R14	80H	205/50 ZR15	86W	215/45 ZR17 RF	91W	225/40 ZR18 RF	92W	235/35 ZR19 RF	91W
185/55 R14	80V	195/50 R16	84V	225/45 ZR17 RF	94W	235/40 ZR18 RF	95W	245/35 ZR19 RF	93W
185/55 R15	82H	205/50 ZR16 RF	91W	245/45 ZR17 RF	99W	245/40 ZR18	93W	255/40 ZR19*	
185/55 R15	82V	225/50 ZR16 RF	96W	225/45 ZR18 RF	95W	225/40 ZR19	89W	215/35 ZR18*	
195/55 R15	85V	205/50 ZR17 RF	93W	245/45 ZR18 RF	100W	245/40 ZR19 RF	98W	265/35 ZR18*	
205/55 R15	88V	215/50 ZR17	91W	205/40 ZR16 RF	83W	255/40 ZR19 RF	100W	275/35 ZR18*	
195/55 R16	87V	225/50 ZR17 RF	98W	215/40 ZR16 RF	86W	215/35 ZR18 RF	84W		
205/55 R16	91V	195/45 R14	77V	225/40 ZR16	85W	225/35 ZR18 RF	87W		
205/55 ZR16 RF	94W	195/45 R15	78V	245/40 ZR17 RF	95W	245/35 ZR18 RF	92W		
215/55 ZR16 RF	97W	205/45 R15	81V	205/40 ZR17 RF	84W	255/35 ZR18 RF	94W		
225/55 R16	95V	195/45 R16	80V	215/40 ZR17 RF	87W	265/35 ZR18 RF	97W		

PT 711 Velox Sport

RF: REINFORCED
*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improve uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 721 Velox Sport

Special pattern design decreases noise and increase handling, also very good cornering performance at high speed levels. The outer shoulder construction increases the amount of surface area contacting the road. The inner shoulder increases the contact patch for better braking performance and stability.

MAXIMUM PERFORMANCE WITH HIGH ENGINEERING TECHNOLOGY

■ PATTERN PROPERTIES



- Fast and effective water discharge thanks to its three grooves.



- Special pattern design enables very good braking performance.



- Offers high performance on both and dry and wet surfaces.



- Wide shoulder blocks increase the surface amount and grip performance of the tire.



- Other shoulder design provides outstanding grip performance both wet and dry surfaces.



- Special tread compound minimizes pattern noise and offers high mileage.





■ SIZE

205/55 R16 91V

PT 721 Velox Sport



■ TECHNOLOGY & BENEFITS

<p>FST</p>	<p>Fine Silica Technology</p>	<p>Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption</p>
<p>High Tech Undertread Construction</p>	<p>Jointless "0" degree spiral nylon cover and wide steel belts</p>	<p>High driving safety, comfort and durability.</p>
<p>Jointless Mono Strand Bead Wire and Hard Bead Filler</p>	<p>Strengthens the link between tire and rim for a more precise driving experience.</p>	<p>Improve lateral stability in high speed cornering and uniformity for smoother ride.</p>



PT 731 Velox Sport

The esthetic and modern pattern design blends performance, comfort and quality. Designed for ultra-high performance cars. Computer simulated pattern, and special tread compound enable optimum performance on wet and dry road conditions.

ENJOY THE ROAD WITH PERFECT DYNAMIC STRUCTURE

■ PATTERN PROPERTIES



- Center block provides stable and a balanced drive.



- Ultimate performance both dry and wet surfaces thanks to its asymmetrical pattern design.



- Wide shoulder blocks increase the surface amount and grip performance of the tire.



- Outer side, designed more intense, provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



- Special tread compound minimizes pattern noise and offers high mileage.



- Fast and effective discharge of water thanks to three grooves.





■ ALL SIZES

205/55 R16	91H
205/55 R16	91V

PT 731 Velox Sport



■ TECHNOLOGY & BENEFITS

<p>FST</p>	<p>Fine Silica Technology</p>	<p>Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while rolling resistance is reduced significantly. This, in turn, results in less fuel consumption</p>
<p>High Tech Undertread Construction</p>	<p>Jointless "0" degree spiral nylon cover and wide steel belts</p>	<p>High driving safety, comfort and durability.</p>
<p>Jointless Mono Strand Bead Wire and Hard Bead Filler</p>	<p>Strengthens the link between tire and rim for a more precise driving experience.</p>	<p>Improve lateral stability in high speed cornering and uniformity for smoother ride.</p>



PT 741 Velox Sport

PT741 is produced for drivers who desire ultimate handling and grip performance without compromising comfort during driving at high speeds

SUMMER TIRE DESIGNED FOR SPORT AND PERFORMANCE CARS

■ PATTERN PROPERTIES



■ Wide center rib increases straight line performance and cornering response effectively on high speeds.



■ Special tread design with large blocks increase and improve handling and steering response.



■ Offers effective short breaking and high performance on both wet and dry surfaces thanks to its asymmetrical pattern.



■ In assertive sizes of PT741 rayon carcass, aramid and nylon belts are used. Rayon carcass improves the response of tires from wheel inputs; aramid and nylon belts improve the tire footprint at higher speeds.



■ Outstanding performance on wet surfaces thanks to its wide straight three channel grooves provides effective discharge of water.





Specially designed tread profile enables exceptional high – speed capabilities , superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel economy as well as durability. PT741 is developed for a wide range, from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.

PT 741 VELOX SPORT





■ ALL SIZES

215/60 R16 RF	99V
225/60 R16	98V
235/60 ZR16	100W
185/55 R14	80V
185/55 R15	82V
195/55 R15	85V
185/55 R16 RF	87H
195/55 R16	87V
195/55 RF16 RFT	87V
205/55 ZR16 RF	94W
205/55 RF16 RFT	91V
215/55 ZR16 RF	97W
225/55 ZR16 RF	99W
205/55 ZR17	91W
215/55 ZR17 RF	98W
225/55 ZR17 RF	101W
225/55 ZR17 RFT	97W
235/55 ZR17 RF	103W
195/50 R15	82V
195/50 R16	84V
205/50 ZR15	86W
205/50 ZR16 RF	91W
225/50 ZR16 RF	96W
205/50 ZR17 RF	93W
205/50 ZR17 RFT	89W
215/50 ZR17 RF	95W
225/50 ZR17 RF	98W
225/50 ZR17 RFT	94W
235/50 ZR18 RF	101W
245/50 ZR18	100W
245/50 RF18 RFT	100W
195/45 R16	84V
205/45 ZR16 RF	87W
215/45 R16 RF	90V
205/45 ZR17 RF	88W
215/45 ZR17 RF	91W
225/45 ZR17 RF	94W
225/45 RF17 RFT	91W
235/45 ZR17 RF	97W
245/45 ZR17 RF	99W
215/45 ZR18 RF	93W
225/45 ZR18 RF	95W
225/45 RF18 RFT	91W
235/45 ZR18 RF	98W
245/45 ZR18 RF	100W
245/45 ZR18 RFT	96W
255/45 ZR18 RF	103W ●●
225/45 ZR19 RF	96W
245/45 ZR19 RF	102W
245/45 ZR19 RFT	98W
255/45 ZR19 RF	104V ●●
205/40 ZR16 RF	83W
205/40 ZR17 RF	84W
215/40 ZR16 RF	86W

215/40 ZR17 RF	87W
235/40 ZR17 RF	94W
245/40 ZR17 RF	95W
215/40 ZR18 RF	89W
225/40 ZR18 RF	92W
235/40 ZR18 RF	95W
245/40 ZR18	93W
245/40 ZR18 RFT	93W
255/40 ZR18	95W ●●
225/40 ZR19 RF	93W
245/40 ZR19 RF	98W
245/40 ZR19 RFT	94W
255/40 ZR19 RF	100W ●●
245/35 ZR17	87W
215/35 ZR18 RF	84W
225/35 ZR18 RF	87W
245/35 ZR18 RF	92W
255/35 ZR18 RF	94W ●●
265/35 ZR18 RF	97W ●●
275/35 ZR18 RF	99W ●●
215/35 ZR19 RF	85W
225/35 ZR19 RF	88W
235/35 ZR19 RF	91W
245/35 ZR19 RF	93W
255/35 ZR19 RF	96W ●●
255/35 ZR19 RFT	92W ●●
275/35 ZR19 RF	100W ●●
245/35 ZR20 RF	95W
255/35 ZR20 RF	97W ●●
235/55 R18*	
275/45 R18 RFT *	
235/45 R19*	
255/45 R19*	
275/45 R18*	
215/40 R18 RFT *	
225/40 R18 RFT *	
225/40 R19 RFT *	
245/40 R20*	
245/40 R20 RFT *	
255/40 R18*	
255/40 R18 RFT *	
255/40 R20*	
265/40 R18*	
265/40 R19*	
275/40 R18*	
275/40 R18 RFT *	
275/40 R19*	
285/40 R19*	
205/35 R18*	
225/35 R19*	
225/35 R19 RFT *	
225/35 R20*	
225/35 R20 RFT *	

PT 741 Velox Sport

245/35 R18 RFT *	
245/35 R19 RFT *	
245/35 R20 RFT *	
255/35 R18 RFT *	
265/35 R19*	
265/35 R20*	
275/35 R18 RFT *	
275/35 R19 RFT *	
275/35 R20*	
275/35 R20 RFT *	
285/35 R19*	
285/35 R18*	
285/35 R18 RFT *	
285/35 R19 RFT *	
295/35 R18*	
295/35 R19*	
295/35 R20*	
225/30 R20*	
235/30 R20*	
245/30 R19*	
245/30 R19 RFT *	
245/30 R20*	
255/30 R19*	
255/30 R19 RFT *	
255/30 R20*	
255/30 R20 RFT *	
265/30 R19*	
265/30 R20*	
275/30 R19*	

RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



W 601 Snow Master

High performance winter tire thanks to its tread pattern enables high traction capability on icy surfaces. Cornering and handling no more be a problem on slippery surfaces for drivers.

GRIP THE ROAD SAFETY IN WINTER CONDITIONS

■ PATTERN PROPERTIES



■ Circumferential blocks improve braking performance.



■ Z shape sipes improve handling performance on snowy and icy surfaces.



■ Special tread compound minimizes pattern noise and offers high mileage.



■ Circumferential three grooves offer excellent water discharge.





■ ALL SIZES

W 601 Snow Master

155/80 R13	79T	165/70 R14 RF	85R	165/65 R14	79T
165/80 R13	83T	175/70 R14	84T	175/65 R14	82T
175/80 R14	88T	175/70 R14 RF	88T	175/65 R14 RF	86T
145/70 R13	71T	185/70 R14	88T ●●	185/65 R14	86T ●●
155/70 R13	75T	195/70 R14	91T ●●	175/65 R15	84T
165/70 R13	79T	195/70 R15 RF	97T ●●	165/60 R14	75T
165/70 R13 RF	83T	155/65 R13	73T		
175/70 R13	82T	165/65 R13	77T		
185/70 R13	86T ●●	175/65 R13	80T		
165/70 R14	81T	155/65 R14	75T		

RF: REINFORCED



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Strengthens the link between tire and rim for a more precise driving experience.



W 651 Snow Master

The ideal winter tire for passenger cars. This tire maximizes your vehicle performance on snowy and icy surfaces. Provides confident stopping power and reliable handling during driving.

ULTIMATE PERFORMANCE ON SNOWY AND ICY SURFACES

■ PATTERN PROPERTIES



■ Wide tread blocks enables confident stopping performance on snowy and icy surfaces.



■ Z-shaped sipes ensures handling performance.



■ V Shaped tread design on the inner side minimizes noise level and enables comfortable driving.



■ High maneuverability capacity thanks to its outer block design.





■ ALL SIZES

185/65 R15	88H	205/60 R16	92H	215/55 R16	93H	225/50 R17 RF	98V	245/45 R18 RF	100V
185/65 R15 RF	92H	215/60 R16	95H	225/55 R16	95H	235/50 R19 RF	103V	245/45 R19 RF	102V
195/65 R15	91H	225/60 R16	98H	215/55 R17 RF	98V	245/50 R18 RF	104V	225/40 R18 RF	92V
195/65 R15 RF	95H	235/60 R16	100H	225/55 R17	97H	195/45 R16 RF	84H	235/40 R18 RF	95V
205/65 R15	94H	185/55 R14	80H	225/55 R17 RF	101V	205/45 R16 RF	87H	245/40 R17 RF	95V
215/65 R15	96H	185/55 R15	82H	235/55 R17 RF	103V	205/45 R17 RF	88H	245/40 R18 RF	97V
205/65 R16	95H	185/55 R16 RF	87H	195/50 R15	82H	215/45 R17 RF	91V	245/40 R19 RF	98V
215/65 R16	98H	195/55 R15	85H	205/50 R15	86H	215/45 R16 RF	90V	255/40 R19 RF	100V
215/65 R16 RF	102T	195/55 R16	87H	195/50 R16	84H	215/45 R18 RF	93V	225/55 R17 RFT*	
185/60 R14	82H	205/55 R15	88V	205/50 R16	87H	225/45 R17 RF	94V	215/50 R18*	
195/60 R14	86H	205/55 R15 RF	92V	205/50 R16 RF	91H	225/45 R18 RF	95V	245/50 R18 RFT*	
185/60 R15	84H	205/55 R16	91H	225/50 R16 RF	96V	235/45 R17 RF	97V	225/45 R18 RFT*	
195/60 R15	88H	205/55 RF16 RFT	91H	205/50 R17 RF	93V	235/45 R18 RF	98V	245/45 R18 RFT*	
205/60 R15	91H	205/55 R17	91H	215/50 R17	91H	245/45 R17 RF	99V	245/45 R19 RFT*	

W 651 Snow Master



RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT

■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 411



PT 421



PT 431



W 671





SUV, 4X4 TIRES

*Best Quality
Suv, 4x4 Tires*



PT 411 Explero A/S

High performance 4x4-SUV tire offers reliable performance through the year. With its special compound mixture shows great traction performance on any kind of surface. Offers superb comfort and very low levels of noise and vibration.

UNIQUE FOUR SEASON PERFORMANCE

■ PATTERN PROPERTIES



■ Special outside block design improves cornering performance and enables four season use.



■ Excellent and effective water discharge by four grooves on the tread.



■ Thanks to its special compound mixture reduces noise levels and offers comfort during driving.



■ Wide contact area distributes the pressure all over the tire and provides outstanding traction.





■ ALL SIZES

235/75 R15 A/S	105H	215/65 R17 A/S	99H
205/70 R15 A/S	96H	225/65 R17 A/S	102H
215/70 R15 A/S	98H	235/65 R17 A/S RF	108H
215/70 R16 A/S	100H	245/65 R17 A/S RF	111H
225/70 R16 A/S RF	107T	255/65 R16 A/S	109H
235/70 R16 A/S	106H	255/65 R17 A/S	110H
245/70 R16 A/S	107H	265/65 R17 A/S	112H
265/70 R16 A/S	112T	215/60 R16 A/S	95H
255/70 R16 A/S	111T	225/60 R17 A/S RF	103H
215/65 R16 A/S	98H	235/60 R16 A/S	100H
215/65 R16 A/S RF	102H		

RF: REINFORCED

PT 411 Explero A/S



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

petlas



PT 421 Explero A/T

Produced to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire thanks to its special compound. Special tread design improves braking performance and reduces irregular wear.

UNIQUE TRACTION ON ANY SURFACE

■ PATTERN PROPERTIES



■ Circular center block improves straight line performance.



■ Tread design guarantees exceptional grip and handling. High grip on wet surface



■ Comfortable, quiet ride on the road thanks to its special compound



■ Outer and inner shoulder designs prevent the vehicle sinking into the mud.





■ ALL SIZES

205/80 R16 A/TRF	104T
215/80 R15 A/T	102S
235/75 R15 A/T	105T
235/70 R16 A/T	106T
255/70 R15 A/T	108T
265/70 R15 A/TRF	116T
245/70 R16 A/TRF	111T
215/65 R16 A/T	98T
265/60 R18 A/TRF	114T

RF: REINFORCED

PT 421 Explero A/T



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 431 Explero H/T

Summer tire developed for luxury SUVs. It combines quality and high performance with its specially developed tread design and compound. Block array maximizes grip performance in every driving situation. Offers short braking distance on wet surfaces.

PREMIUM SUMMER HIGH PERFORMANCE
TIRE WITH EXCEPTIONAL COMFORT

■ PATTERN PROPERTIES



■ Center block improves straight line performance.



■ High performance on any kind of surface thanks to its asymmetrical pattern design.



■ Reinforced shoulder block increases the surface amount provides and offers high cornering performance.



■ Outer side ,designed more intense , provides grips dry and wet surfaces better with special canal structure and increases the stability of the vehicle.



■ Three grooves enable effective water discharge.





■ ALL SIZES

235/65 R17 RF H/T 108V
 215/60 R17 H/T 96V
 225/60 R18 H/T 100H
 235/60 R17 H/T 102V
 235/60 R18 RF H/T 107V
 245/60 R18 H/T 105H
 255/60 R17 H/T 106V ●●
 255/60 R18 RF H/T 112V ●●

265/60 R18 H/T 110H ●●
 265/60 R18 H/T 110V ●●
 215/55 R18 H/T 95H
 225/55 R19 H/T 99H
 225/55 R18 H/T 98V
 225/55 R17 H/T 97V
 235/55 R17 RF H/T 103V
 235/55 R18 H/T 100V

235/55 R19 RF H/T 105V
 245/55 R19 H/T 103H
 255/55 R18 RF H/T 109V ●●
 255/55 R19 RF H/T 111V ●●
 275/55 R19 H/T 111V ●●
 235/50 R18 RF H/T 101V
 255/50 R19 RF H/T 107V ●●
 255/50 ZR19 RFT H/T 107W ●●

PT 431 Explero H/T

265/50 ZR19 RF H/T 110W ●●
 275/45 ZR19 RF H/T 108W ●●
 275/45 ZR20 RF H/T 110W ●●
 285/45 R19 H/T 107V ●●
 275/40 ZR20 H/T 102W ●●
 315/35 ZR20 RF*
 315/35 ZR20 RF RFT*

RF: REINFORCED
 RFT: RUN FLAT
 *UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



W 671 Explero

Designed for high traction and grip performance on snowy and icy surfaces. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. Reduce stopping distance on slippery surfaces.

TRACTION AND GRIP IN WINTER CONDITIONS

■ PATTERN PROPERTIES



■ Z shaped sipes offers high performance on slippery surfaces.



■ Center block improves straight line performance.



■ Asymmetrical pattern enables low noise and high driving comfort.



■ Block array provides short breaking performance.



■ Reinforced block structure offers high maneuverability performance.





■ ALL SIZES

W 671 Explero

205/80 R16 RF	104T	235/65 R17 RF	108V	235/55 R17 RF	103V	235/50 R19 RF	103V
215/80 R15	102S	245/65 R17 RF	111H	265/60 R18 RF	114H	255/50 R19 RF	107V
235/75 R15 RF	109T	255/65 R17 RF	114H	215/55 R18	95H	255/50 RF19 RF RFT	107V
205/70 R15	96T	265/65 R17 RF	116H	225/55 R18 RF	102H	265/50 R20 RF	111H
215/70 R15	98H	215/60 R17 RF	100H	235/55 R18 RF	104H	245/50 R20	102V
215/70 R16 RF	104H	225/60 R17 RF	103V	255/55 R18 RF	109V	225/45 R19 RF	96V
225/70 R16 RF	107H	235/60 R17 RF	106H	225/55 R19	99H	275/45 R20 RF	110V ●●
235/70 R16	106T	255/60 R17 RF	110V	235/55 R19 RF	105V	285/45 R19 RF	111H ●●
245/70 R16 RF	111T	225/60 R18 RF	104V	245/55 R19	103H	315/35 R20 RF	110V ●●
255/70 R16	111T	235/60 R18 RF	107H	255/55 R19 RF	111V	255/55 R18 RFT*	
265/70 R16	112T	245/60 R18 RF	105H	275/55 R19	111H	275/40 R20*	
215/65 R17	99H	255/60 R18 RF	112H	235/50 R18 RF	101V ●●		
225/65 R17 RF	106H						

RF: REINFORCED
RFT: RUN FLAT
*UNDER DEVELOPMENT



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 825



PT 825



PT 835





LIGHT TRUCK TIRES

PT 875



SUMMER WINTER



PT 925



WINTER



PT 935



WINTER





PT 825 Full Power

Designed for commercial light trucks, transporters and vans. Deep treads and straight ribs provide excellent handling in any kind of weather condition. Offer durability thanks to its special compound resistant to wear and cornering safety.

ULTIMATE PERFORMANCE AND LONG LIFE UNDER HEAVY LOAD

■ PATTERN PROPERTIES



■ Z shaped sipes improve handling in any kind of surface



■ Center groove improves riding comfort.



■ Unique block array minimizes road noise.



■ Three grooves provide excellent water discharge.





■ ALL SIZES

195 R14 C	8PR	106/104R
195 R15 C	8PR	106/104R
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R

PT 825 Full Power



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 825 Full Power Plus

Radial summer tire designed with high technology. Offers high-grip performance and wear resistance thanks to its special tread compound.

ENJOY THE ROAD EVEN UNDER HEAVY LOAD

■ PATTERN PROPERTIES



■ Z shaped sipes improve handling in any kind of surface




■ Center groove improves riding comfort.



■ Unique block array minimizes road noise.



■ Three grooves provide excellent water discharge.





■ ALL SIZES

5.00 R12 C	8PR	83/81P
155 R12 C	8PR	88/86N
155 R13 C	6PR	85/83N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185 R15 C	8PR	103/102R
175/75 R16 C	8PR	101/99R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	8PR	110/108R

205/75 R16 C	10PR	113/111R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R
165/70 R14 C	6PR	89/87R
195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107S
225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R

PT 825 Full Power Plus

205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 835 Full Power

Safe handling in all kind of situations, even under heavy loads. Wide contact area increased stability and increase driving performance. Offer excellent mileage, rolling resistance and safety in wet surfaces.

ULTIMATE PERFORMANCE IN SUMMER

■ PATTERN PROPERTIES



■ Better grip performance on both and dry surfaces thanks to its special tread design.



■ Center groove improves riding comfort.



■ Computer designed block array minimizes road and pattern noise.



■ Three grooves provide excellent water discharge.



■ Reinforced carcass and bead improves durability.





■ ALL SIZES

PT 835 Full Power

205/75 R16 C	8PR	110/108R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/70 R15 C	8PR	112/110R
195/65 R16 C	8PR	104/102T
205/65 R16 C	8PR	107/105T
215/65 R15 C	6PR	104/102T
215/65 R16 C	8PR	109/107R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N
195/60 R16 C	6PR	99/97T



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

It improves uniformity for smoother ride, durability and tread wear.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 875 Advente

Interlocking tread blocks offers durability. Perform high performance on dry surfaces. High wear resistance against wear with special shoulder structure. Multi-angle sipes offer all-season traction every kind of road

MAXIMUM PERFORMANCE DURING FOUR SEASONS

■ PATTERN PROPERTIES



■ Its a special four season tire, provides high handling performance and short brake distance on icy, wet and dry surfaces.



■ Thanks to its special tread mixture show outstanding grip performance on icy surfaces.



■ Block array minimizes road noise and offers comfort driving.



■ Effective discharge of water by three grooves tread pattern.



■ Special shoulder structure provides high resistance to wear.





■ ALL SIZES

PT 875 Advente

155 R12 C	8PR	88/86N	205/70 R15 C	8PR	106/104R
155 R13 C	8PR	90/89R	215/70 R15 C	8PR	109/107R
185 R14 C	8PR	102/100R	225/70 R15 C	8PR	112/110R
195 R14 C	8PR	106/104R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R			
195/70 R15 C	8PR	104/102R			



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 925 Full Grip

Designed to overcome winter challenges. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.

DON'T WORRY ABOUT LOAD IN WINTER

■ PATTERN PROPERTIES



■ Multi kerf design improves handling and braking performance on snowy surfaces.



■ Confident stopping power on snow and ice.



■ Special tread compound reduces road and pattern noise.



■ Shoulder blocks improves cornering and maneuverability.



■ Lateral grooves provide excellent water discharge.



■ Sharp edges on shoulder improve cornering.





■ ALL SIZES

PT 925 Full Grip

155 R12 C	8PR	88/86N	195/70 R15 C	8PR	104/102R
155 R13 C	6PR	85/83N	205/70 R15 C	8PR	106/104R
185 R14 C	8PR	102/100R	215/70 R15 C	8PR	109/107R
195 R14 C	8PR	106/104R	225/70 R15 C	8PR	112/110R
175/75 R16 C	8PR	101/99R	205/65 R15 C	8PR	102/100T
185/75 R16 C	8PR	104/102R	205/65 R16 C	8PR	107/105T
195/75 R16 C	8PR	107/105R	215/65 R16 C	8PR	109/107R
205/75 R16 C	8PR	110/108R	225/65 R16 C	8PR	112/110R
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
225/75 R16 C	8PR	118/116R	195/60 R16 C	6PR	99/97T



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	It improves uniformity for smoother ride, durability and tread wear.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve lateral stability in high speed cornering and uniformity for smoother ride.



PT 935 Full Grip

Unique tread design with wavy sipes enables high grip performance on icy surfaces. Offers safety and durability.

A SAFETY DEVICE FOR WET, SNOWY AND ICY ROADS

■ PATTERN PROPERTIES



■ Increased foot print offers high traction and grip on snow and ice.



■ Multi sipes and block type tread design improves grip performance.



■ Special tread compound reduces noise level.



■ Shoulder blocks improve cornering and handling.



■ Wide grooves provide exceptional discharge of water.





■ ALL SIZES

PT 935 Full Grip

155 R12 C	8PR	88/86N
155 R13 C	6PR	85/83N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	10PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R
195/70 R15 C	8PR	104/102R

205/70 R15 C	8PR	106/104R
225/70 R15 C	8PR	112/110R
215/65 R15 C	6PR	104/102T
195/65 R16 C	8PR	104/102T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	10PR	121/119R
285/65 R16 C	10PR	128 N
195/60 R16 C	6PR	99/97T



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

It improves uniformity for smoother ride, durability and lower rate of tread wear.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve lateral stability in high speed cornering and
uniformity for smoother ride.

PT 311 ELEGANT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R12	77	T	412	190	35
145/70 R12	69	T	325	190	36
155/70 R12	73	T	365	190	36
165/70 R12	77	T	412	190	36
175 / 70 R 12	80	T	450	190	36
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
165/80 R13 RF	87	R	545	170	41
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
195/65 R14	89	H	580	210	36
165/60 R14	75	T	387	190	36
165/80 R15	87	T	545	190	35
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36
185/65 R15	88	T	560	190	36
195/65 R15	91	T	615	190	36
195/65 R15 RF	95	T	690	190	42

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.




*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.50B	4.00B, 5.00B	157	553	F	C	69	2
4.50B	3.50B, 4.00B, 5.00B	144	512	F	C	69	2
4.50B	4.00B, 5.00B	154	526	F	C	69	2
5.00B	4.00B, 4.50B, 5.50B	168	539	F	C	69	2
5.00B	4.50B, 5.50B, 6.00B	177	555	E	C	69	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J	157	578	F	C	69	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J, 5.50B, 5½J	165	594	E	C	69	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J, 5.50B, 5½J	165	594	E	C	69	2
4.50B, 4½J	3.50B, 3½J, 4.00B, 4J, 5.00B, 5J	144	538	F	C	69	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J	154	553	F	C	69	2
5.00B, 5J	4.00B, 4J, 4.50B, 4½J, 5.50B, 5½J	168	566	F	C	69	2
5.00B, 5J	4.00B, 4J, 4.50B, 4½J, 5.50B, 5½J	168	566	E	C	69	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	177	580	E	C	69	2
5.50B, 5½J	4.50B, 4½J, 5.00B, 5J, 6.00B, 6J	192	591	E	C	69	2
4.50B, 4½J	5.00B, 5J, 5.50B, 5½J	154	534	F	C	69	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	170	549	F	C	69	2
5.00B, 5J	5.50B, 5½J, 6.00B, 6J	170	559	E	C	69	2
5J	4½J, 5½J, 6J	177	636	E	C	69	2
5.00B, 5J	4J, 4.50B, 4½J, 5.50B, 5½J	168	590	E	C	69	2
5.00B, 5J	4J, 4.50B, 4½J, 5.50B, 5½J	168	590	E	C	69	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	177	605	E	C	69	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	177	605	E	C	69	2
5½J	4½J, 5J, 6J	193	617	E	C	69	2
6J	5J, 5½J, 6½J	202	631	E	C	69	2
4.50B, 4½J	5.00B, 5J, 5.50B, 5½J	155	561	F	C	69	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6J	172	575	E	C	69	2
5.00B, 5J	5.50B, 5½J, 6J	174	586	E	C	69	2
5.00B, 5J	5.50B, 5½J, 6J	174	587	E	C	69	2
5½J	5J, 6J, 6½J	189	601	E	C	69	2
6J	5½J, 6½J, 7J	201	614	E	C	69	2
5.00B, 5J	4½J, 5½J, 6J	170	559	F	C	69	2
4½J	4J, 5J, 5½J	165	645	E	C	69	2
6J	5J, 5½J, 6½J	203	659	C	C	69	2
5J	5½J, 6J	175	610	E	C	69	2
5½J	5J, 6J, 6½J	187	627	E	C	69	2
6J	5½J, 6½J, 7J	201	640	E	C	69	2
6J	5½J, 6½J, 7J	201	640	E	C	69	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.






petlas

PT 515 IMPERIUM

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R13	82	H	475	210	36
175/70 R13	82	T	475	190	36
175/70 R14	84	H	500	210	36
175/70 R14 RF	88	H	560	210	42
185/70 R14	88	H	560	210	36
175/65 R14	82	H	475	210	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	H	530	210	36
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
175/65 R15	84	H	500	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15	91	V	615	240	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
205/65 R15	94	V	670	240	36
205/65 R15 RF	99	H	775	210	42
215/65 R15	96	V	710	240	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
195/60 R15	88	V	560	240	36
205/60 R15	91	H	615	210	36
205/60 R15	91	V	615	240	36
185/55 R15	82	V	475	240	36
195/55 R15	85	V	515	240	36
205/55 R15	88	V	560	240	36
195/50 R15*	82	V	475	240	36
205/50 R15*	86	V	530	240	36
205/65 R16	95	H	690	210	36
215/65 R16	98	H	750	210	36
215/65 R16	98	V	750	240	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
195/55 R16	87	V	545	240	36
205/55 R16	91	H	615	210	36
205/55 R16	91	V	615	240	36
215/55 R16	93	H	650	210	36
215/55 R16	93	V	650	240	36
225/55 ZR16	95	W	690	270	36
205/50 ZR16*	87	W	545	270	36
225/55 ZR17	97	W	730	270	36
205/50 ZR17 RF*	93	W	650	270	42
225/50 ZR17 RF*	98	W	750	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42

*Size with rim guard



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	178	578	E	B	70	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	178	578	E	B	70	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	178	605	E	B	70	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	177	606	E	B	70	2
5½J	4½J, 5J, 6J	191	616	E	B	70	2
5.00B, 5J	5.50B, 5½J, 6J	177	588	E	B	70	2
5.00B 5J	5.50B, 5½J, 6J	176	589	E	B	70	2
5½J	5J, 6J, 6½J	191	598	E	B	70	2
5½J	5J, 6J, 6½J	189	582	E	B	70	2
6J	5½J, 6½J, 7J	201	593	E	B	71	2
5J	5½J, 6J	177	615	E	B	70	2
5½J	5J, 6J, 6½J	191	625	E	B	70	2
5½J	5J, 6J, 6½J	190	626	C	B	70	2
6J	5½J, 6½J, 7J	201	639	C	B	71	2
6J	5½J, 6½J, 7J	201	639	C	B	71	2
6J	5½J, 6½J, 7J	201	640	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	211	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	211	650	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	651	C	B	71	2
6½J	6J, 7J, 7½J	225	662	C	B	71	2
5½J	5J, 6J, 6½J	189	608	E	B	70	2
5½J	5J, 6J, 6½J	189	608	E	B	70	2
6J	5½J, 6½J, 7J	199	622	E	B	71	2
6J	5½J, 6½J, 7J	199	622	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	630	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	630	C	B	71	2
6J	5J, 5½J, 6½J	192	591	E	B	70	2
6J	5½J, 6½J, 7J	198	598	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	215	610	C	B	71	2
6J	5½J, 6½J, 7J	196	583	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	211	590	E	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	675	C	B	71	2
6½J	6J, 7J, 7½J	224	688	C	B	71	2
6½J	6J, 7J, 7½J	224	688	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	657	C	B	71	2
6J	5½J, 6½J, 7J, 7½J	210	657	C	B	71	2
6J	5½J, 6½J, 7J	198	625	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	636	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	214	636	C	B	71	2
7J	6J, 6½J, 7½J	225	639	C	B	71	2
7J	6J, 6½J, 7½J	225	639	C	B	71	2
7J	6J, 6½J, 7½J, 8J	228	661	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	210	617	E	B	71	2
7J	6J, 6½J, 7½J, 8J	226	690	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	207	644	C	B	71	2
7J	6J, 6½J, 7½J, 8J	223	666	C	B	71	2
7J	7½J, 8J	204	633	C	B	71	2
7½J	7J, 8J, 8½J	225	641	C	B	71	2



petlas

PT 525 PROGREEN

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/70 R14	88	T	560	190	36
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
175/65 R14	82	T	475	190	36
185/65 R14	86	T	530	190	36
185/60 R14	82	H	475	210	36
185/55 R14	80	H	450	210	36
185/55 R15	82	V	475	240	36
185/65 R15	88	T	560	190	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	V	615	240	36
195/65 R15	91	H	615	210	36
195/65 R15	91	T	615	190	36
195/65 R15 RF	95	T	690	190	42
205/65 R 15	94	H	670	210	36
185/60 R15	84	H	500	210	36
185/60 R15	88	H	560	210	42
195/60 R15	88	H	560	210	36
195/55 R15	85	H	515	210	36
195/50 R15	82	H	475	210	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
215/60 R16	95	V	690	240	36
195/55 R16	87	H	545	210	36
205/55 R16*	91	H	615	210	36
195/50 R16 RF	88	V	560	240	42

*Size with rim guard

PT 535 IMPERIUM

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R14*	84	H	500	210	36
175/65 R14*	82	H	475	210	36
185/65 R14	86	H	530	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15*	91	H	615	210	36
195/65 R15 RF*	95	H	690	210	42
185/60 R15*	84	H	500	210	36
185/60 R15 RF*	88	H	560	210	42
195/60 R15*	88	H	560	210	36
195/55 R16	87	H	545	210	36
205/55 R16*	91	H	615	210	36
195/50 R16	84	H	500	210	36

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.




*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	4½J, 5J, 6J	192	613	C	C	69	2
5J	4½J, 5½J, 6J	178	599,5	C	C	69	2
5J	4½J, 5.00B, 5.50B, 5½J, 6J	178	599,5	C	C	69	2
5J	5½J, 6J	179	582	C	C	69	2
5½J	5J, 6J, 6½J	190	596	C	C	69	2
5½J	5J, 6J, 6½J	186	574	C	C	69	2
6J	5J, 5½J, 6½J	193	556	C	C	69	2
6J	5J, 5½J, 6½J	193	582	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5½J	5J, 6J, 6½J	190	620	C	C	69	2
5J,	6J, 6½J	190	620	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	B	69	2
6J	5½J, 6½J, 7J	206	633	C	B	69	2
6J	5½J, 6½J, 7J	206	633	C	C	69	2
6J	5½J, 6½J, 7J	206	633	C	C	70	2
6J	5½J, 6½J, 7J, 7½J	206	646	C	C	70	2
5½J	5J, 6J, 6½J	195	600	C	C	69	2
5½J	5J, 6J, 6½J	184	603,5	C	C	69	2
6J	5½J, 6½J, 7J	200	593	C	B	69	2
6J	5½J, 6½J, 7J	200	573	C	B	69	2
6J	5½J, 6½J, 7J	200	615	C	B	69	2
6J	5½J, 6½J, 7J, 7½J	204	650	C	B	70	2
6J	5½J, 6½J, 7J, 7½J	203,5	650	C	B	70	2
6½J	6J, 7J, 7½J	221	663	C	B	70	2
6J	5½J, 6½J, 7J	200	618	C	B	69	2
6½J	5½J, 6J, 7J, 7½J	213	628	C	B	70	2
6J	5½J, 6½J, 7J	200	598	C	B	69	2

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.00B, 5J	4½J, 5.50B, 5½J, 6J	178	598	E	B	70	2
5.00B, 5J	5.50B, 5½J, 6J	176	581	E	B	70	2
5½J	5J, 6J, 6½J	193	596	E	B	71	2
5½J	5J, 6J, 6½J	193	620	E	B	71	2
5½J	5J, 6J, 6½J	192	621	E	B	70	2
6J	5½J, 6½J, 7J	205	627	E	B	71	2
6J	5½J, 6½J, 7J	204	628	E	B	71	2
5½J	5J, 6J, 6½J	188	598	E	B	70	2
5½J	5J, 6J, 6½J	187	599	E	B	70	2
6J	5½J, 6½J, 7J	198	611	E	B	71	2
6J	5½J, 6½J, 7J	197	621	E	B	71	2
6½J	5½J, 6J, 7J, 7½J	210	631	E	B	71	2
6J	5½J, 6½J, 7J	198	602	E	B	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.






petlas

PT 711 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60 R13*	80	H	450	210	36
185/60 R13*	80	V	450	240	36
185/55 R14*	80	H	450	210	36
185/55 R14*	80	V	450	240	36
195/45 R14*	77	V	412	240	36
185/55 R15*	82	H	475	210	36
185/55 R15 *	82	V	475	240	36
195/55 R15 *	85	V	515	240	36
205/55 R15*	88	V	560	240	36
195/50 R15*	82	V	475	240	36
205/50 ZR15*	86	W	530	270	36
195/45 R15 *	78	V	425	240	36
205/45 R15*	81	V	462	240	36
195/55 R16*	87	V	545	240	36
205/55 R16 *	91	V	615	240	36
205/55 ZR16 RF*	94	W	670	270	42
215/55 ZR16 RF*	97	W	730	270	42
225/55 R16 *	95	V	690	240	36
195/50 R16 *	84	V	600	240	36
205/50 ZR16 RF*	91	W	615	270	42
225/50 ZR16 RF*	96	W	710	270	42
195/45 R16*	80	V	450	240	36
205/45 ZR16 RF*	87	W	545	270	42
205/40 ZR16 RF*	83	W	487	270	42
215/40 ZR16 RF*	86	W	530	270	42
225/40 ZR16*	85	W	515	270	36
225/55 ZR17*	97	W	730	270	36
205/50 ZR17 RF*	93	W	650	270	42
215/50 ZR17*	91	W	615	270	36
225/50 ZR17 RF*	98	W	750	270	42
205/45 ZR17 RF*	88	W	560	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RF*	94	W	670	270	42
245/45 ZR17 RF*	99	W	775	270	42
205/40 ZR17 RF*	84	W	500	270	42
215/40 ZR17 RF*	87	W	545	270	42
235/40 ZR17 RF*	94	W	670	270	42
245/40 ZR17 RF*	95	W	690	270	42
225/45 ZR18 RF*	95	W	690	270	42
245/45 ZR18 RF*	100	W	800	270	42
215/40 ZR18 RF*	89	W	580	270	42
225/40 ZR18 RF*	92	W	630	270	42
235/40 ZR18 RF*	95	W	690	270	42
245/40 ZR18*	93	W	650	270	36
215/35 ZR18 RF*	84	W	500	240	42
225/35 ZR18 RF*	87	W	545	270	42
245/35 ZR18 RF*	92	W	630	270	42
255/35 ZR18 RF*	94	W	670	270	42
225/40 ZR19*	89	W	580	270	36
245/40 ZR19 RF*	98	W	750	270	42
255/40 ZR19 RF*	100	W	800	270	42
225/35 ZR19 RF*	88	W	560	270	42
235/35 ZR19 RF	91	W	615	270	42
245/35 ZR19 RF	93	W	650	270	42

*Size with rim guard



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5.50B, 5½J	5.00B, 5J, 6.00B, 6J, 6½J	189	552	E	C	70	2
5.50B, 5½J	5.00B, 5J, 6.00B, 6J, 6½J	189	552	E	C	70	2
6J	5J, 5½J, 6½J	194	560	E	C	70	2
6J	5J, 5½J, 6½J	194	560	E	C	70	2
6½J	6J, 7J, 7½J	195	532	E	C	71	2
6J	5J, 5½J, 6½J	194	585	E	C	70	2
6J	5J, 5½J, 6½J	194	585	E	C	70	2
6J	5½J, 6½J, 7J	201	595	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	607	E	C	71	2
6J	5½J, 6½J, 7J	201	577	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	587	E	C	71	2
6½J	6J, 7J, 7½J	195	557	E	C	71	2
7J	6½J, 7½J	206	565	E	C	71	2
6J	5½J, 6½J, 7J	201	620	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	632	C	C	71	2
7J	6J, 6½J, 7½J	226	642	C	C	71	2
7J	6J, 6½J, 7½J, 8J	233	654	C	C	71	2
6J	5½J, 6½J, 7J	201	602	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	612	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	632	C	C	71	2
6½J	6J, 7J, 7½J	195	582	E	C	71	2
7J	6½J, 7½J	206	590	E	C	71	2
7½J	7J, 8J	212	570	E	C	71	2
7½J	7J, 8J, 8½J	218	578	E	C	71	2
8J	7½J, 8½J, 9J	230	586	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	680	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	638	E	C	71	2
7J	6J, 6½J, 7½J	226	648	E	C	71	2
7J	6J, 6½J, 7½J, 8J	233	658	C	C	71	2
7J	6½J, 7½J	206	616	E	C	71	2
7J	7½J, 8J	213	626	E	C	71	2
7½J	7J, 8J, 8½J	225	634	C	C	71	2
8J	7½J, 8½J, 9J	243	652	C	B	71	2
7½J	7J, 8J	212	596	E	C	71	2
7½J	7J, 8J, 8½J	218	604	E	C	71	2
8½J	8J, 9J, 9½J	241	620	C	B	71	2
8½J	8J, 9J, 9½J	248	628	C	B	71	2
7½J	7J, 8J, 8½J	225	659	C	C	71	2
8J	7½J, 8½J, 9J	243	677	C	B	71	2
7½J	7J, 8J, 8½J	218	629	E	C	71	2
8J	7½J, 8½J, 9J	230	637	E	C	71	2
8½J	8J, 9J, 9½J	241	645	C	B	71	2
8½J	8J, 9J, 9½J	248	653	E	B	71	2
7½J	7J, 8J, 8½J, 9J	218	615	E	C	71	2
8J	7½J, 8½J, 9J	230	615	E	C	71	2
8½J	8J, 9J, 9½J	248	629	E	B	71	2
9J	8½J, 9½J, 10J	260	635	C	B	71	2
8J	7½J, 8½J, 9J	230	663	E	C	71	2
8½J	8J, 9J, 9½J	248	679	C	B	71	2
9J	8.5J 9J 9.5J 10J	256	695	C	B	71	2
8J	7½J, 8½J, 9J	230	641	E	C	71	2
8½J	8J, 9J, 9½J	241	647	E	B	71	2
8½J	8J, 9J, 9½J	248	655	E	B	71	2



petlas

PT 721 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R16*	91	V	615	240	36

*Size with rim guard

PT 731 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
205/55 R16*	91	H	615	210	36
205/55 R16*	91	V	615	240	36

*Size with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.




*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.




*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½J, 6J, 7J, 7½J	214	637	C	B	71	2



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	5½J, 6J, 7J, 7½J	214	637	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	637	C	C	71	2



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.




*All figures are for reference; our company is not responsible for printing errors

PT 741 VELOX SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/55 R14*	80	V	450	240	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	V	515	240	36
195/50 R15*	82	V	475	240	36
205/50 ZR15*	86	W	530	270	36
215/60 R16 RF	99	V	775	240	42
225/60 R16	98	V	750	240	36
235/60 ZR16	100	W	800	270	36
185/55 R16 RF*	87	H	545	210	42
195/55 RF16*	87	V	545	240	36
195/55 R16 RFT*	87	V	545	240	36
205/55 ZR16 RF*	94	W	670	270	42
205/55 RF16 RFT*	91	V	615	240	36
215/55 ZR16 RF*	97	W	730	270	42
225/55 ZR16 RF*	99	W	775	270	42
195/50 R16*	84	V	500	240	36
205/50 ZR16 RF*	91	W	615	270	42
225/50 ZR16 RF*	96	W	710	270	42
195/45 R16 RF*	84	V	500	240	42
205/45 ZR16 RF*	87	W	545	270	42
215/45 R16 RF*	90	V	600	240	42
215/40 ZR16 RF*	86	W	530	270	42
205/40 ZR16 RF*	83	W	487	270	42
205/55 ZR17*	91	W	615	270	36
215/55 ZR17 RF*	98	W	750	270	42
225/55 ZR17 RF*	101	W	825	270	42
225/55 ZR17 RFT*	97	W	730	270	36
235/55 ZR17 RF*	103	W	875	270	42
205/50 ZR17 RF*	93	W	650	270	42
205/50 RF17 RFT*	89	W	580	270	36
215/50 ZR17 RF*	95	W	690	270	42
225/50 ZR17 RF*	98	W	750	270	42
225/50 ZR17 RFT*	94	W	670	270	36
205/45 ZR17 RF*	88	W	560	270	42
215/45 ZR17 RF*	91	W	615	270	42
225/45 ZR17 RFT*	91	W	615	270	36
225/45 ZR17 RF*	94	W	670	270	42
235/45 ZR17 RF*	97	W	730	270	42
245/45 ZR17 RF*	99	W	775	270	42
205/40 ZR17 RF*	84	W	500	270	42
215/40 ZR17 RF*	87	W	545	270	42
235/40 ZR17 RF*	94	W	670	270	42
245/40 ZR17 RF*	95	W	690	270	42
245/35 ZR17 RF*	87	W	545	270	36
235/50 ZR18 RF*	101	W	825	270	42
245/50 ZR18	100	W	800	270	36
245/50 RF18 RFT	100	W	800	270	36
215/45 ZR18 RF*	93	W	650	270	42
225/45 ZR18 RF*	95	W	690	270	42
225/45 RF18 RFT*	91	W	615	270	36
235/45 ZR18 RF*	98	W	750	270	42
245/45 ZR18 RF*	100	W	800	270	42
245/45 ZR18 RFT*	96	W	710	270	36
255/45 ZR18 RF*	103	W	875	270	42
215/40 ZR18 RF*	89	W	580	270	42
225/40 ZR18 RF*	92	W	630	270	42
235/40 ZR18 RF*	95	W	690	270	42
245/40 ZR18*	93	W	650	270	36
245/40 ZR18 RFT*	93	W	650	270	36
255/40 ZR18	95	W	690	270	36
215/35 ZR18 RF*	84	W	500	270	42
225/35 ZR18 RF*	87	W	545	270	42
245/35 ZR18 RF*	92	W	630	270	42
255/35 ZR18 RF*	94	W	670	270	42
265/35 ZR18 RF	97	W	730	270	42
275/35 ZR18 RF*	99	W	775	270	42
215/35 ZR19 RF	85	W	515	270	42
225/45 ZR19 RF*	96	W	710	270	42
245/45 ZR19 RF*	102	W	850	270	42
245/45 ZR19 RFT*	98	W	750	270	36
225/40 ZR19 RF*	93	W	650	270	42
245/40 ZR19 RF*	98	W	750	270	42
245/40 ZR19 RFT*	94	W	670	270	36
255/40 ZR19 RF*	100	W	800	270	42
235/35 ZR19 RF*	91	W	615	270	42
245/35 ZR19 RF*	93	W	650	270	42
255/35 ZR19 RF*	96	W	710	270	42
255/35 ZR19 RFT*	92	W	630	270	36
275/35 ZR19 RF*	100	W	800	270	42
245/35 ZR20 RF*	95	W	690	270	42
255/35 ZR20 RF	97	W	730	270	42

*Size with rim guard



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J	193	563	E	C	70	2
6J	5J, 5½J, 6½J	191	588	C	C	70	2
6J	5½J, 6½J, 7J	201	595	C	C	71	2
6J	5½J, 6½J, 7J	195	581	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	585	C	C	71	2
6½J	6J, 7J, 7½J	224	666	C	C	71	2
6½J	6J, 7J, 7½J, 8J	232	677	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	244	690	C	C	71	2
6J	5J, 5½J, 6½J	193	615	E	C	70	2
6J	5½J, 6½J, 7J	201	621	C	C	71	2
6J	5½J, 6½J, 7J	201	621	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	636	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	635	E	B	72	2
7J	6J, 6½J, 7½J	228	643	C	C	71	2
7J	6J, 6½J, 7½J, 8J	237	654	C	C	71	2
6J	5½J, 6½J, 7J	195	608	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	616	C	C	71	2
7J	6J, 6½J, 7½J, 8J	228	632	C	C	71	2
6½J	6J, 7J, 7½J	197	584	C	C	71	2
7J	6½J, 7½J	205	596	C	C	71	2
7J	7½J, 8J	214	600	C	C	71	2
7½J	7J, 8J, 8½J	219	582	C	C	71	2
7½J	7J, 8J	218	572	C	C	72	2
6½J	5½J, 6J, 7J, 7½J	213	658	C	C	71	2
7J	6J, 6½J, 7½J	226	671	C	C	71	2
7J	6J, 6½J, 7½J, 8J	230	686	C	C	71	2
7J	6J, 6½J, 7½J, 8J	230	686	E	B	70	2
7½J	6½J, 7J, 8J, 8½J	246	693	C	C	72	2
6½J	5½J, 6J, 7J, 7½J	209	641	C	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	644	E	B	72	2
7J	6J, 6½J, 7½J	220	648	C	B	71	2
7J	6J, 6½J, 7½J, 8J	223	662	C	C	71	2
7J	6J, 6½J, 7½J, 8J	226	660	E	C	71	2
7J	6½J, 7½J	206	623	C	C	71	2
7J	7½J, 8J	211	632	C	C	71	2
7½J	7J, 8J, 8½J	226	642	E	B	71	2
7½J	7J, 8J, 8½J	222	643	C	B	71	2
8J	7½J, 8½J, 9J	236	649	C	B	72	2
8J	7½J, 8½J, 9J	244	655	C	C	72	2
7½J	7J, 8J	216	600	C	C	71	2
7½J	7J, 8J, 8½J	218	608	C	C	71	2
8½J	8J, 9J, 9½J	244	621	C	C	72	2
8½J	8J, 9J, 9½J	246	635	C	C	71	2
8½J	8J, 9J, 9½J	243	608	C	C	71	2
7½J	7J, 8J, 8½J	244,5	708	E	B	71	2
7½J	7J, 8J, 8½J	244,5	708	E	B	71	2
7½J	6½J, 7J, 8J, 8½J	242	697	C	B	72	2
7J	7½J, 8J	213	656	C	C	71	2
7½J	7J, 8J, 8½J	219	668	C	B	71	2
7½J	7J, 8J, 8½J	220	667	E	B	71	2
8J	7½J, 8½J, 9J	238	671	C	B	72	2
8J	7½J, 8½J, 9J	246	679	C	B	72	2
8J	7½J, 8½J, 9J	247	678	E	B	72	2
8½J	8J, 9J, 9½J	260	692	C	B	72	2
7½J	7J, 8J, 8½J	218	633	C	C	71	2
8J	7½J, 8½J, 9J	227	647	C	C	72	2
8½J	8J, 9J, 9½J	237	647	C	C	72	2
8½J	8J, 9J, 9½J	245	662	C	B	71	2
8½J	8J, 9J, 9½J	245	662	E	B	72	2
9J	8½J, 9½J, 10J	257	660	E	B	72	2
7½J	7J, 8J, 8½J	218	617	E	B	71	2
8J	7½J, 8½J, 9J	228	618	C	C	72	2
8½J	8J, 9J, 9½J	244	636	C	B	71	2
7½J	7J, 8J, 8½J	217	640	E	B	71	2
9J	8½J, 9½J, 10J	253	639	C	C	72	2
9½J	9J, 10J, 10½J	270	647	C	B	72	2
9½J	9J, 10J, 10½J, 11J	266	659	C	C	73	2
7½J	7J, 8J, 8½J	225	693	C	C	72	2
8J	7½J, 8½J, 9J	245	706	C	B	72	2
8J	7½J, 8½J, 9J	245	706	E	B	72	2
8J	7½J, 8½J, 9J	229	666	C	C	72	2
8½J	8J, 9J, 9½J	248	681	C	C	71	2
8½J	8J, 9J, 9½J	248	681	E	C	71	2
9J	8½J, 9½J, 10J	258	692	C	B	72	2
8½J	8J, 9J, 9½J	236	654	C	B	72	2
8½J	8J, 9J, 9½J	241	662	C	B	72	2
9J	8½J, 9½J, 10J	253	665	C	C	72	2
9J	8½J, 9½J, 10J	254	664	E	B	71	2
9½J	9J, 10J, 10½J, 11J	268	682	C	B	72	2
8½J	8J, 9J, 9½J	243	688	C	B	71	2
9J	8½J, 9½J, 10J	253,5	691,6	E	B	72	2

W 601 SNOW MASTER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
175/80 R14	88	T	560	190	35
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
165/60 R14	75	T	387	190	36
195/70 R15 RF	97	T	730	190	42
175/65 R15	84	T	500	190	36

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.




*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.50B, 4½J	4.00B, 4J, 5.00B, 5J	156	580	F	E	71	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J, 5.50B, 5½J	168	595	E	E	71	2
4.50B, 4½J	3.50B, 3½J, 4.00B, 4J, 5.00B, 5J	144	537	E	E	71	2
4.50B, 4½J	4.00B, 4J, 5.00B, 5J	152	554	F	E	71	2
5.00B, 5J	4.00B, 4J, 4.50B, 4½J, 5.50B, 5½J	167	567	F	E	71	2
5.00B, 5J	4.00B, 4J, 4.50B, 4½J, 5.50B, 5½J	167	567	E	E	71	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	177	580	E	E	71	2
5.50B, 5½J	4.50B, 4½J, 5.00B, 5J, 6.00B, 6J	193	593	E	E	71	2
4.50B, 4½J	5.00B, 5J, 5.50B, 5½J	154	536	E	E	71	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6.00B, 6J	170	553	E	E	71	2
5.00B, 5J	5.50B, 5½J, 6.00B, 6J	175	560	E	E	71	2
5J	4½J, 5J, 6J	177	636	E	E	71	2
5.00B, 5J	4J, 4.50B, 4½J, 5.50B, 5½J	167	590	E	E	71	2
5.00B, 5J	4J, 4.50B, 4½J, 5.50B, 5½J	166	591	E	E	71	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	177	605	E	E	71	2
5.00B, 5J	4½J, 5.50B, 5½J, 6J	176	606	E	E	71	2
5½J	4½J, 5J, 6J	193	618	E	E	71	2
6J	5J, 5½J, 6½J	202	635	E	E	71	2
4.50B, 4½J	5.00B, 5J, 5.50B, 5½J	154	562	E	E	71	2
5.00B, 5J	4.50B, 4½J, 5.50B, 5½J, 6J	170	575	F	E	71	2
5.00B, 5J	5.50B, 5½J, 6J	175	586	E	E	71	2
5.00B, 5J	5.50B, 5½J, 6J	174	587	E	E	71	2
5½J	5J, 6J, 6½J	187	602	E	E	71	2
5.00B, 5J	4½J, 5½J, 6J	168	559	E	E	71	2
6J	5J, 5½J, 6½J	202	659	E	E	71	2
5J	5½J, 6J	174	613	E	E	71	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.






petlas

W 651 SNOW MASTER

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
185/55 R14	80	H	450	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
215/65 R15	96	H	710	210	36
185/60 R15	84	H	500	210	36
195/60 R15	88	H	560	210	36
205/60 R15	91	H	615	210	36
185/55 R15	82	H	475	210	36
195/55 R15	85	H	515	210	36
205/55 R15	88	V	560	240	36
205/55 R15 RF	92	V	630	240	42
195/50 R15*	82	H	475	210	36
205/50 R15*	86	H	530	210	36
205/65 R16	95	H	690	210	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	T	850	190	42
205/60 R16	92	H	630	210	36
215/60 R16	95	H	690	210	36
225/60 R16	98	H	750	210	36
235/60 R16	100	H	800	210	36
185/55 R16 RF*	87	H	545	210	42
195/55 R16	87	H	545	210	36
205/55 R16	91	H	615	210	36
205/55 RF16 RFT*	91	H	615	210	36
215/55 R16	93	H	650	210	36
225/55 R16	95	H	690	210	36
195/50 R16*	84	H	500	210	36
205/50 R16 *	87	H	545	210	36
205/50 R16 RF*	91	H	615	210	42
225/50 R16 RF*	96	V	710	240	42
195/45 R16 RF*	84	H	500	210	42
205/45 R16 RF*	87	H	545	210	42
215/45 R16 RF*	90	V	600	240	42
205/55 R17*	91	H	615	210	36
215/55 R17 RF	98	V	750	240	42
225/55 R17	97	H	730	210	36
225/55 R17 RF	101	V	825	240	42
235/55 R17 RF*	103	V	875	240	42
205/50 R17 RF*	93	V	650	240	42
215/50 R17*	91	H	615	210	36
225/50 R17 RF*	98	V	750	240	42
205/45 R17 RF*	88	H	560	210	42
215/45 R17 RF*	91	V	615	240	42
225/45 R17 RF*	94	V	670	240	42
235/45 R17 RF*	97	V	730	240	42
245/45 R17 RF*	99	V	775	240	42
245/40 R17 RF*	95	V	690	240	42
245/50 R18 RF*	104	V	900	240	42
215/45 R18 RF*	93	V	650	240	42
225/45 R18 RF*	95	V	690	240	42
235/45 R18 RF*	98	V	750	240	42
245/45 R18 RF*	100	V	800	240	42
225/40 R18 RF*	92	V	630	240	42
235/40 R18 RF*	95	V	690	240	42
245/40 R18 RF*	97	V	730	240	42
235/40 R18 RF	95	V	690	240	42
235/50 R19 RF*	103	V	875	240	42
245/45 R19 RF*	102	V	850	240	42
245/40 R19 RF*	98	V	750	240	42
255/40 R19 RF*	100	V	800	240	42

*Sizes with rim guard



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J	189	581	E	C	71	2
6J	5½J, 6½J, 7J	201	590	E	C	71	2
6J	5J, 5½J, 6½J	192	564	E	C	71	2
5½J	5J, 6J, 6½J	189	627	E	C	71	2
5½J	5J, 6J, 6½J	188	623	E	C	71	2
6J	5½J, 6½J, 7J	200	641	E	C	71	2
6J	5½J, 6½J, 7J	201	639	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	207	653	E	C	71	2
6½J	6J, 7J, 7½J	223	662	E	C	71	2
5½J	5J, 6J, 6½J	189	608	E	C	71	2
6J	5½J, 6½J, 7J	201	592	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	630	E	C	71	2
6J	5J, 5½J, 6½J	192	592	E	C	71	2
6J	5½J, 6½J, 7J	195	604	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	214	609	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	213	610	E	C	71	2
6J	5½J, 6½J, 7J	195	583	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	590	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	675	E	C	71	2
6½J	6J, 7J, 7½J	222	688	E	C	71	2
6½J	6J, 7J, 7½J	222	690	E	C	71	2
6J	5½J, 6½J, 7J, 7½J	209	656	E	C	71	2
6½J	6J, 7J, 7½J	221	667	E	C	71	2
6½J	6J, 7J, 7½J, 8J	229	680	E	C	71	2
7J	6½J, 7½J, 8J, 8½J	242	690	E	C	71	2
6J	5J, 5½J, 6½J	192	615	E	C	71	2
6J	5½J, 6½J, 7J	196	629	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	215	635	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	216	636	E	C	71	2
7J	6J, 6½J, 7½J	224	638	E	C	71	2
7J	6J, 6½J, 7½J, 8J	231	657	E	C	71	2
6J	5½J, 6½J, 7J	196	610	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	210	611	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	209	612	E	C	71	2
7J	6J, 6½J, 7½J, 8J	222	641	E	C	71	2
6½J	6J, 6½J, 7J, 7½J	195	585	E	C	71	2
7J	6½J, 7½J	203	595	E	C	71	2
7J	7½J, 8J	211	604	C	B	71	2
6½J	5½J, 6J, 7J, 7½J	209	659	E	C	71	2
7J	6J, 6½J, 7½J	221	673	E	C	71	2
7J	6J, 6½J, 7½J, 8J	229	688	E	C	71	2
7J	6J, 6½J, 7½J, 8J	228	689	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	240	690	E	C	71	2
6½J	5½J, 6J, 7J, 7½J	205	647	E	C	71	2
7J	6J, 6½J, 7½J	218	655	E	C	71	2
7J	6J, 6½J, 7½J, 8J	221	668	E	C	71	2
7J	6½J, 7½J	207	618	E	C	71	2
7J	7½J, 8J	203	631	E	C	71	2
7½J	7J, 8J, 8½J	223	642	E	C	71	2
8J	7½J, 8½J, 9J	230	648	E	C	71	2
8J	7½J, 8½J, 9J	234	661	E	C	71	2
8½J	8J, 9J, 9½J	244	632	E	C	71	2
7½J	7J, 8J, 8½J	246	710	E	C	71	2
7J	7½J, 8J	211	660	E	C	71	2
7½J	7J, 8J, 8½J	223	662	E	C	71	2
8J	7½J, 8½J, 9J	236	675	E	C	71	2
8J	7½J, 8½J, 9J	233	686	E	C	71	2
8J	7½J, 8½J, 9J	228	645	E	C	71	2
8½J	8J, 9J, 9½J	238	650	E	C	71	2
8½J	8J, 9J, 9½J	238	661	E	C	71	2
8½J	8J, 9J, 9½J	238	650	E	C	71	2
7½J	6½J, 7J, 8J, 8½J	238	725	C	C	71	2
8J	7½J, 8½J, 9J	240	710	C	C	71	2
8½J	8J, 9J, 9½J	244	684	E	C	71	2
9J	8½J, 9½J, 10J	262	689	C	C	72	2



petlas

PT 411 EXPLERO A/S

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/70 R15	96	H	710	210	36
215/70 R15	98	H	750	210	36
235/75 R15	105	H	925	210	36
215/70 R16	100	H	800	210	36
225/70 R16 RF	107	T	975	190	42
235/70 R16	106	H	950	210	36
245/70 R16	107	H	975	210	36
255/70 R16	111	T	1090	190	36
265/70 R16	112	T	1120	190	36
215/65 R16	98	H	750	210	36
215/65 R16 RF	102	H	850	210	42
255/65 R16	109	H	1030	210	36
215/60 R16	95	H	690	210	36
235/60 R16	100	H	800	210	36
215/65 R17	99	H	775	210	36
225/65 R17	102	H	850	210	36
235/65 R17 RF	108	H	1000	210	42
245/65 R17 RF	111	H	1090	210	42
255/65 R17	110	H	1060	210	36
265/65 R17	112	H	1120	210	36
225/60 R17 RF	103	H	875	210	42

PT 421 EXPLERO A/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
215/80 R15*	102	S	850	180	35
235/75 R15*	105	T	925	190	36
255/70 R15*	108	T	1000	190	36
265/70 R15 RF*	116	T	1250	190	42
205/80 R16 RF*	104	T	900	190	42
235/70 R16*	106	T	950	190	36
245/70 R16 RF*	111	T	1090	190	42
215/65 R16*	98	T	750	190	36
265/60 R18 RF*	114	T	1180	190	42

*Sizes with rim guard

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.




*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5J, 5½J, 6½J, 7J	209	669	E	E	70	2
6½J	5½J, 6J, 7J	229	680	E	E	70	2
6½J	6J, 7J, 7½J, 8J	241	728	C	E	71	2
6½J	5½J, 6J, 7J	229	705	C	E	70	2
6½J	6J, 7J, 7½J	234	719	C	E	71	2
7J	6J, 6½J, 7½J, 8J	246	731	C	E	71	2
7J	6½J, 7½J, 8J	248	750	C	E	71	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	E	72	2
8J	7J, 7½J, 8½J, 9J	272	778	C	E	72	2
6½J	6J, 7J, 7½J	221	686	E	E	70	2
6½J	6J, 7J, 7½J	221	686	C	E	70	2
7½J	7J, 8J, 8½J, 9J	264	734	C	E	72	2
6½J	6J, 7J, 7½J	222	662	E	E	70	2
7J	6½J, 7½J, 8J, 8½J	241	684	C	E	71	2
6½J	6J, 7J, 7½J	222	712	E	E	70	2
6½J	6J, 7J, 7½J, 8J	230	724	C	E	71	2
7J	6½J, 7½J, 8J, 8½J	240	739	E	E	71	2
7J	7½J, 8J, 8½J	247	748	C	E	71	2
7½J	7J, 8J, 8½J, 9J	263	761	C	E	72	2
8J	7½J, 8½J, 9J, 9½J	276	773	C	E	72	2
6½J	6J, 7J, 7½J, 8J	228	703	C	E	71	2



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	E	E	71	2
6½J	6J, 7J, 7½J, 8J	244	726	E	E	71	2
7½J	6½J, 7J, 8J, 8½J	270	731	E	E	71	2
8J	7J, 7½J, 8½J, 9J	272	745	E	E	73	2
5½J	5J, 6J, 6½J, 7J	209	727	E	E	71	2
7J	6J, 6½J, 7½J, 8J	241	731	E	E	71	2
7J	6½J, 7½J, 8J	248	750	E	E	71	2
6½J	6J, 7J, 7½J	228	678	E	E	71	2
8J	7½J, 8½J, 9J, 9½J	263	773	E	E	72	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.






petlas

PT 431 EXLERO H/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
235/65 R17 RF	108	V	1000	240	42
215/60 R17*	96	V	710	240	36
235/60 R17*	102	V	850	240	36
255/60 R17*	106	V	950	240	36
225/55 R17*	97	V	730	240	36
235/55 R17 RF*	103	V	875	240	42
225/60 R18*	100	H	800	210	36
235/60 R18 RF*	107	V	975	240	42
245/60 R18*	105	H	925	210	36
255/60 R18 RF*	112	V	1120	240	42
265/60 R18*	110	H	1060	210	36
265/60 R18*	110	V	1060	240	36
215/55 ZR18*	95	H	690	210	36
225/55 R18*	98	V	750	240	36
235/55 R18*	100	V	800	240	36
255/55 R18 RF*	109	V	1030	240	42
235/50 R18 RF*	101	V	825	240	42
225/55 R19*	99	H	775	210	36
235/55 R19 RF*	105	V	925	240	42
245/55 R19*	103	H	875	210	36
255/55 R19 RF*	111	V	1090	240	42
275/55 R19	111	V	1090	240	36
255/50 R19 RF*	107	V	975	240	42
255/50 ZR19 RF RFT*	107	W	975	270	42
265/50 ZR19 RF*	110	W	1060	270	42
275/45 ZR19 RF*	108	W	1000	270	42
285/45 R19*	107	V	975	240	36
275/45 ZR20 RF*	110	W	1060	270	42
275/40 ZR20*	102	W	850	270	36

*Sizes with rim guard



RIM		INFLATED DIAMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J, 8½J	240	735	B	C	71	2
6½J	6J, 7J, 7½J	219	689	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	242	709	C	C	71	2
7½J	7J, 8J, 8½J, 9J	260	736	C	C	72	2
7J	6J, 6½J, 7½J, 8J	229	675	B	C	72	2
7½J	6½J, 7J, 8J, 8½J	245	690	B	C	72	2
6½J	6J, 7J, 7½J, 8J	224	730	B	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	736	B	C	71	2
7J	7½J, 8J, 8½J	245	749	B	C	71	2
7½J	7J, 8J, 8½J, 9J	261	763	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	269	773	B	C	72	2
8J	7½J, 8½J, 9J, 9½J	269	773	B	C	72	2
7J	6J, 6½J, 7½J	226	696	C	C	71	2
7J	6J, 6½J, 7½J, 8J	230	702	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	246	714	C	C	71	2
8J	7J, 7½J, 8½J, 9J	261	735	B	C	72	2
7½J	6½J, 7J, 8J, 8½J	240	688	B	C	71	2
7J	6J, 6½J, 7½J, 8J	230	726	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	741	C	C	71	2
7½J	7J, 8J, 8½J	250	750	C	C	71	2
8J	7J, 7½J, 8½J, 9J	261	761	B	C	72	2
8½J	7½J, 8J, 9J, 9½J	283	784	B	C	72	2
8J	7J, 7½J, 8½J, 9J	259	738	B	C	72	2
8J	7J, 7½J, 8½J, 9J	258	739	C	C	72	2
8½J	7½J, 8J, 9J, 9½J	270	750	B	C	72	2
9J	8½J, 9½J, 10J, 10½J	269	731	B	C	72	2
9½J	9J, 10J, 10½J	283	740	B	C	72	2
9J	8½J, 9.5J, 10J, 10½J	269	756	B	C	72	2
9½J	9J, 10J, 10½J, 11J	273	729	B	C	72	2






petlas

W 671 EXPLERO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
215/80 R15	102	S	850	180	35
235/75 R15 RF	109	T	1030	190	42
205/70 R15	96	T	710	190	36
215/70 R15	98	H	750	210	36
205/80 R16 RF	104	T	900	190	41
215/70 R16 RF	104	H	900	210	42
225/70 R16 RF	107	H	975	210	42
235/70 R16	106	T	950	190	36
245/70 R16 RF	111	T	1090	190	42
255/70 R16	111	T	1090	190	36
265/70 R16	112	T	1120	190	36
215/65 R17	99	H	775	210	36
225/65 R17 RF	106	H	950	210	42
235/65 R17 RF	108	V	1000	240	42
245/65 R17 RF	111	H	1090	210	42
255/65 R17 RF	114	H	1180	210	42
265/65 R17 RF	116	H	1250	210	42
215/60 R17 RF	100	H	800	210	42
225/60 R17 RF	103	V	875	240	42
235/60 R17 RF	106	H	950	210	42
255/60 R17 RF	110	V	1060	240	42
235/55 R17 RF*	103	V	875	240	42
235/45 R17 RF	97	V	730	240	42
225/60 R18 RF	104	V	900	240	42
235/60 R18 RF	107	H	975	210	42
245/60 R18	105	H	925	210	36
245/60 R18 RF	105	H	925	210	36
255/60 R18 RF	112	H	1120	210	42
265/60 R18 RF*	114	H	1180	210	42
215/55 R18*	95	H	690	210	36
225/55 R18 RF*	102	H	850	210	42
235/55 R18 RF*	104	H	900	210	42
255/55 R18 RF*	109	V	1030	240	42
235/50 R18 RF*	101	V	825	240	42
225/55 R19*	99	H	775	210	36
235/55 R19 RF*	105	V	925	240	42
245/55 R19*	103	H	875	210	36
255/55 R19 RF*	111	V	1090	240	42
275/55 R19*	111	H	1090	210	36
235/50 R19 RF*	103	V	875	240	42
255/50 R19 RF*	107	V	975	240	42
255/50 RF19 RFT*	107	V	975	240	42
225/45 R19 RF*	96	V	710	240	42
245/45 R19	103	H	875	210	36
285/45 R19 RF*	111	H	1090	210	42
245/50 R20*	102	V	850	240	36
265/50 R20 RF*	111	H	1090	210	42
275/45 R20 RF*	110	V	1060	240	42
275/40 R20 RF*	106	V	950	240	42

*Sizes with rim guard



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	C	C	70	2
6½J	6J, 7J, 7½J, 8J	235	732	C	C	70	2
6J	5J, 5½J, 6½J, 7J	212	667	E	C	70	2
6½J	5½J, 6J, 7J	226	680	E	C	70	2
5½J	5J, 6J, 6½J, 7J	209	728	E	C	70	2
6½J	5½J, 6J, 7J	224	710	E	C	70	2
6½J	6J, 7J, 7½J	233	723	C	C	70	2
7J	6J, 6½J, 7½J, 8J	241	738	C	C	70	2
7J	6½J, 7½J, 8J	248	750	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	260	764	C	C	71	2
8J	7J, 7½J, 8½J, 9J	272	778	C	C	71	2
6½J	6J, 7J, 7½J	231	705	E	C	70	2
6½J	6J, 7J, 7½J, 8J	238	722	C	C	71	2
7J	6½J, 7½J, 8J, 8½J	240	738	C	C	71	2
27J	7½J, 8J, 8½J	256	747	C	C	70	2
7½J	7J, 8J, 8½J, 9J	270	758	C	C	70	2
8J	7½J, 8½J, 9J, 9½J	270	770	C	C	71	2
6½J	6J, 7J, 7½J	217	687	E	C	70	2
6½J	6J, 7J, 7½J, 8J	247	700	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	256	712	C	C	70	2
7½J	7J, 8J, 8½J, 9J	260	738	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	245	690	C	C	70	2
8J	7½J, 8J, 8½J, 9J	245	642	C	C	70	2
6½J	6J, 7J, 7½J, 8J	247	725	C	C	70	2
7J	6½J, 7½J, 8J, 8½J	256	737	C	C	70	2
7J	7½J, 8J, 8½J	260	749	C	C	70	2
7J	7½J, 8J, 8½J	260	749	C	C	72	2
7½J	7J, 8J, 8½J, 9J	270	760	C	C	71	2
8J	7½J, 8½J, 9J, 9½J	272	775	C	C	72	2
7J	6J, 6½J, 7½J	238	691	E	C	70	2
7J	6J, 6½J, 7½J, 8J	244	703	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	263	713	C	C	70	2
8J	7J, 7½J, 8½J, 9J	276	735	C	C	71	2
7½J	6½J, 7J, 8J, 8½J	258	688	C	C	70	2
7J	6J, 6½J, 7½J, 8J	244	725	C	C	70	2
7½J	6½J, 7J, 8J, 8½J	263	735	C	C	70	2
7½J	7J, 8J, 8½J	265	747	C	C	70	2
8J	7J, 7½J, 8½J, 9J	276	757	C	C	71	2
8½J	7½J, 8J, 9J, 9½J	283	785	C	C	72	2
7½J	6½J, 7J, 8J, 8½J	245	719	C	C	70	2
8J	7J, 7½J, 8½J, 9J	278	738	C	C	71	2
8J	7J, 7½J, 8½J, 9J	265	739	E	C	71	2
7½J	7J, 8J, 8½J	227	688	E	C	70	2
7½J	7J, 8J, 8½J	265	747	C	C	70	2
9½J	9J, 10J, 10½J	285	739	C	C	72	2
7½J	7J, 8J, 8½J	255	755	E	C	71	2
8½J	7½J, 8J, 9J, 9½J	277	774	C	C	72	2
9J	8½J, 9½J, 10J, 10½J	266	760	C	C	73	2
9½J	9J, 10J, 10½J, 11J	278	728	E	C	73	2

Description

- *For load capacity on various speeds, and inflation figures, please consult your sales representative.
- *Load capacity on standard speed and weight.
- *Our company is entitled to make any change on any information in this catalogue, without further notice.
- *This catalogue annuls all the previous catalogues.
- *All figures are for reference; our company is not responsible for printing errors.



petlas

FULL POWER PT 825

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
195 R14 C	8	106/104	R	1900	3600
195 R15 C	8	106/104	R	1900	3600
225/70 R15 C	8	112/110	R	2240	4240
225/70 R15 C	10	116/114	R	2500	4720

FULL POWER PT 825 PLUS

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
5.00 R12 C	8	83/81	P	974	1848
155 R12 C	8	88/86	N	1120	2120
155 R13 C	6	85/83	N	1030	1948
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
165/70 R14 C	6	89/87	R	1160	2180
185 R15 C	8	103/102	R	1750	3400
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
215/70 R15 C	8	109/107	S	2060	3900
225/70 R15 C	8	112/110	R	2240	4240
225/70 R15 C	10	116/114	R	2500	4720
205/65 R15 C	8	102/100	T	1700	3200
175/75 R16 C	8	101/99	R	1650	3100
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	8	110/108	R	2120	4000
205/75 R16 C	10	113/111	R	2300	4360
215/75 R16 C	8	113/111	R	2300	4360
215/75 R16 C	10	116/114	R	2500	4720
225/75 R16 C	8	118/116	R	2640	5000
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	8	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.




*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	5½J	5J, 6J	198	666	E	A	72	2
170	65	5½J	5J, 6J	196	691	E	A	72	2
170	65	6½J	6J, 7J	228	697	E	A	72	2
170	80	6½J	6J, 7J	228	697	E	A	72	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
150	65	3½J	3½J	141	564	F	B	71	2
140	65	4½J	4.00B, 4.50B, 4J, 5J	155	552	F	B	72	2
140	51	4½J	4.00B, 4.50B, 4J, 5.00B, 5J	154	572	F	B	72	2
170	65	5½J	5J, 6J	185	648	E	A	71	2
170	65	5½J	5J, 6J	200	668	E	A	72	2
170	54	5J	4½J	167	592	E	B	72	2
170	65	5½J	5J, 6J	186	675	E	A	71	2
170	65	6J	5J, 5½J	196	651	E	A	72	2
170	65	6J	5J, 5,5J	206	668	E	A	72	2
180	65	6½J	5½J, 6J, 7J	222	679	E	A	72	2
170	65	6½J	6J, 7J	225	696	E	A	72	2
170	80	6½J	6J, 7J	225	696	E	A	72	2
190	54	6J	5½J, 6½J	206	650	C	A	71	2
170	69	5J	4 ½ J, 5½J,	170	668	E	A	72	2
170	69	5J	5½J, 6J	180	684	E	A	72	2
170	69	5½J	5J, 6J	192	698	E	A	72	2
170	69	5½J	6J, 6½J	200	712	E	A	72	2
170	76	5½J	6J, 6½J	200	712	E	A	72	2
170	69	6J	5½J, 6½J, 7J	216	728	E	A	72	2
170	76	6J	5½J, 6½J, 7J	216	728	E	A	72	2
170	76	6J	6½J, 7J	224	740	E	A	72	2
190	69	6J	5½J, 6½J	206	677	C	A	71	2
170	69	6½J	6J, 7J	219	684	E	A	72	2
170	69	6½J	6J, 7J	223	707	E	A	72	2
170	69	7J	6½J, 7½J	238	717	E	A	72	2

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



petlas

FULL POWER PT 835

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
225/70 R15 C	8	112/110	R	2240	4240
215/65 R15 C	6	104/102	T	1800	3400
205/75 R16 C	8	110/108	R	2120	4000
215/75 R16 C	8	113/111	R	2300	4360
215/75 R16 C	10	116/114	R	2500	4720
195/65 R16 C	8	104/102	T	1800	3400
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	T	2060	3900
235/65 R16 C	8	115/113	R	2430	4600
235/65 R16 C	12	121/119	R	2900	5440
285/65 R16 C	10	128	N	3600	-
195/60 R16 C	6	99/97	T	1550	2920

ADVENTE PT 875

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8	88/86	N	1120	2120
155 R13 C	8	90/89	N	1200	2320
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
215/70 R15 C	8	109/107	R	2060	3900
225/70 R15 C	8	112/110	R	2240	4240
205/65 R15 C	8	102/100	T	1700	3200
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	8	110/108	R	2120	4000
215/75 R16 C	8	113/111	R	2300	4360
225/75 R16 C	8	118/116	R	2640	5000
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	8	115/113	R	2430	4600

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	6½J	6J, 7J	227	694	C	A	72	2
190	54	6½J	6J, 7J	218	660	C	A	71	2
170	69	5½J	6J, 6½J	201	708	C	A	71	2
170	69	6J	5½J, 6½J, 7J	216	728	C	A	71	2
170	76	6J	5½J, 6½J, 7J	213	723	C	A	71	2
190	69	6J	5½J	201	660	E	A	71	2
190	69	6J	5½J, 6½J	205	674	C	A	71	2
190	69	6½J	6J, 7J	218	682	C	A	71	2
170	69	7J	6½J, 7½J	240	716	C	A	72	2
170	83	7J	6½J, 7½J	240	716	C	A	72	2
140	76	8½J	8J, 9J	298	777	C	A	72	2
190	54	6J	5½J, 6½J	201	645	E	A	71	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4.00B, 4.50B, 4J, 5J	157	550	F	C	71	2
140	65	4½J	4.00B, 4.50B, 4J, 5.00B, 5J	157	578	F	C	71	2
170	65	5½J	5J, 6J	188	650	F	B	71	2
170	65	5½J	5J, 6J	198	666	F	A	71	2
170	65	6J	5J, 5½J	201	655	F	A	71	2
170	65	6J	5½J, 6½J	209	669	F	A	71	2
170	65	6½J	5½J, 6J, 7J	221	683	F	A	71	2
170	65	6½J	6J, 7J	228	697	F	A	71	2
190	54	6J	5½J, 6½J	209	647	E	A	71	2
170	69	5J	5½J, 6J	184	684	F	B	71	2
170	69	5½J	5j, 6j	196	698	F	A	71	2
170	69	5½J	6J, 6½J	203	714	F	A	71	2
170	69	6J	5½J, 6½J, 7J	216	728	F	A	71	2
170	76	6J	6½J, 7J	223	744	F	A	71	2
190	69	6J	5½J, 6½J	209	672	E	A	71	2
170	69	6½J	6J, 7J	221	686	F	A	71	2
170	69	6½J	6J, 7J	228	698	F	A	71	2
170	69	7J	6½J, 7½J	240	712	F	A	71	2

Description

- * For load capacity on various speeds, and inflation figures, please consult your sales representative.
- * Load capacity on standard speed and weight.
- * Our company is entitled to make any change on any information in this catalogue, without further notice.
- * This catalogue annuls all the previous catalogues.
- * All figures are for reference; our company is not responsible for printing errors.



petlas

FULL GRIP 925

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8	88/86	N	1120	2120
155 R13 C	6	85/83	N	1030	1948
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
215/70 R15 C	8	109/107	R	2060	3900
225/70 R15 C	8	112/110	R	2240	4240
205/65 R15 C	8	102/100	T	1700	3200
175/75 R16 C	8	101/99	R	1650	3100
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	8	110/108	R	2120	4000
215/75 R16 C	8	113/111	R	2300	4360
225/75 R16 C	8	118/116	R	2640	5000
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	8	115/113	R	2430	4600
195/60 R16 C	6	99/97	T	1550	2920

FULL GRIP 935

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
155 R12 C	8	88/86	N	1120	2120
155 R13 C	6	85/83	N	1030	1948
185 R14 C	8	102/100	R	1700	3200
195 R14 C	8	106/104	R	1900	3600
195/70 R15 C	8	104/102	R	1800	3400
205/70 R15 C	8	106/104	R	1900	3600
225/70 R15 C	8	112/110	R	2240	4240
215/65 R15 C	6	104/102	T	1800	3400
185/75 R16 C	8	104/102	R	1800	3400
195/75 R16 C	8	107/105	R	1950	3700
205/75 R16 C	10	113/111	R	2300	4360
215/75 R16 C	10	116/114	R	2500	4720
225/75 R16 C	8	118/116	R	2640	5000
195/65 R16 C	8	104/102	T	1800	3400
205/65 R16 C	8	107/105	T	1950	3700
215/65 R16 C	8	109/107	R	2060	3900
225/65 R16 C	8	112/110	R	2240	4240
235/65 R16 C	10	121/119	R	2900	5440
285/65 R16 C	10	128	N	3600	-
195/60 R16 C	6	99/97	T	1550	2920

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4.00B, 4.50B, 4J, 5J	157	550	G	C	71	2
140	51	4½J	4.00B, 4.50B, 4J, 5.00B, 5J	157	578	G	C	71	2
170	65	5½J	5J, 6J	188	650	G	B	71	2
170	65	5½J	5J, 6J	198	666	G	B	73	2
170	65	6J	5J, 5½J	201	655	G	B	73	2
170	65	6J	5½J, 6½J	209	669	F	B	73	2
170	65	6½J	5½J, 6J, 7J	221	683	F	B	73	2
170	65	6½J	6J, 7J	228	697	F	B	72	2
190	54	6J	5½J, 6½J	209	647	F	B	73	2
170	69	5J	4 ½ J, 5½J,	177	668	G	B	73	2
170	69	5J	5½J, 6J	184	684	G	B	73	2
170	69	5½J	5j, 6J	196	698	G	B	73	2
170	69	5½J	6J, 6½J	203	714	F	B	73	2
170	69	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	76	6J	6½J, 7J	223	744	F	B	73	2
190	69	6J	5½J, 6½J	209	672	F	B	73	2
170	69	6½J	6J, 7J	221	686	F	B	73	2
170	69	6½J	6J, 7J	228	698	F	B	73	2
170	69	7J	6 ½ J, 7½J	240	712	E	B	73	2
190	54	6J	5½J, 6½J	201	640	G	B	73	2



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIAMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4.00B, 4.50B, 4J, 5J	154	550	F	B	73	2
140	51	4½J	4.00B, 4.50B, 4J, 5.00B, 5J	157	578	F	B	73	2
170	65	5½J	5J, 6J	188	650	G	B	73	2
170	65	5½J	5J, 6J	198	666	F	B	73	2
170	65	6J	5J, 5½J	198	661	F	B	73	2
170	65	6J	5½J, 6½J	221	683	F	B	73	2
170	65	6½J	6J, 7J	222	698	F	B	73	2
190	54	6½J	6J, 7J	211	660	F	A	73	2
170	69	5J	5½J, 6J	184	684	G	B	73	2
170	69	5½J	5j, 6J	196	698	F	B	73	2
170	76	5½J	6J, 6½J	203	710	F	B	73	2
170	76	6J	5½J, 6½J, 7J	216	728	F	B	73	2
170	76	6J	6½J, 7J	225	747	F	B	73	2
190	69	6J	5½J	201	660	G	B	73	2
190	69	6J	5½J, 6½J	200	677	F	B	73	2
170	69	6½J	6J, 7J	215	690	F	B	73	2
170	69	6½J	6J, 7J	228	698	F	B	73	2
170	80	7J	6 ½ J, 7½J	238	716	F	B	73	2
140	76	8½J	8J, 9J	297	778	F	A	75	2
190	54	6J	5½J, 6½J	201	640	F	B	73	2



Description

- *For load capacity on various speeds, and inflation figures, please consult your sales representative.
- *Load capacity on standard speed and weight.
- *Our company is entitled to make any change on any information in this catalogue, without further notice.
- *This catalogue annuls all the previous catalogues.
- *All figures are for reference; our company is not responsible for printing errors.

Petlas Passenger, Light Truck and 4x4 Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.






petlas
TRACK OF TRUST

2017 Edition

DISTRIBUTED BY



petlas

Headquarters - Factory

Petlas Tire Industry and Trade
Kırşehir - Kayseri Devlet Yolu Üzeri
Göhlisar Mevkii 7. km Kırşehir / TURKEY
T. +90 386 252 65 50 F.+90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade
Kazım Karabekir Cd. Özcan Plaza
No.124 06060 Ankara / TURKEY
T. +90 312 309 30 30 F.+90 312 310 95 09

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.petlas.com

MADE IN TURKEY